

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

1 2 DEG 1947

WARTIME REPORT

ORIGINALLY ISSUED October 1943 as Memorandum Report

PRESSURE-DISTRIBUTION MEASUREMENTS ON VARIOUS SURFACES

OF A 0.2375-SCALE MODEL OF THE DOUGLAS XA-26 AIRPLANE

IN THE 19-FOOT PRESSURE TUNNEL

By C. Dixon Ashworth

Langley Memorial Aeronautical Laboratory
Langley Field, Va.

NACA

WASHINGTON

N A C A LIBRARY

LANGLEY MEMORIAL AERONAUTICAL

LABORATORY

LANGLEY Field, VR.

MACA WARTIME REPORTS are reprints of papers originally issued to provide rapid distribution of advance research results to an authorized group requiring them for the war effort. They were pre-viously held under a security status but are now unclassified. Some of these reports were not technically edited. All have been reproduced without change in order to expedite general distribution.



MEMORANDUM REPORT

for the

Army Air Forces, Materiel Command

PRESSURE-DISTRIBUTION MEASUREMENTS ON VARIOUS SURFACES

OF A 0.2375-SCALE MODEL OF THE DOUGLAS XA-26 AIRPLANE

IN THE 19-FOOT PRESSURE TUNNEL

By C. Dixon Ashworth

SUMMARY

Pressure-distribution measurements on a 0.2375-scale model of the Douglas XA-26 airplane were conducted in the NAGA 19-foot pressure tunnel.

The measurements were made on the spinner-cowlnacelle assembly and the fuselage for angles of yaw from
-10° to 10° and at angles of attack from -8° to 3°.
Pressures were also measured on the main-wheel door, nosewheel door, and bomb-bay door at door angles from closed
to full open through various ranges of angle of yaw and
angle of attack. These tests were made at an airspeed
of approximately 95 miles per hour with the air in the
tunnel compressed to 35 pounds per square inch absolute,
corresponding to a Reynolds number and Mach number of
approximately 3,900,000 and 0.12, respectively.

The results of the pressure measurements on the doors are presented as loads and hinge moments, whereas the measurements obtained on the nacelle and fuselage are shown as pressures on isometric diagrams. The latter method of presenting data was used to eliminate tedious tables.

Tests of the model indicate that no critical pressures should be encountered in the high-speed level-flight condition of the airplane at 17,000 feet unless the spinner is removed; removing the spinner introduces critical pressures at 265 miles per hour. The nose-wheel door over most of the range tested will tend to close while the main-wheel and bomb-bay doors tend to open due to the aerodynamic loads.



INTRODUCTION

Efficient aerodynamic and structural design of modern high-speed aircraft is often dependent on a knowledge of the static pressures acting on the surface of the airplane. To obtain such information for application to the design of the XA-26 airplane, the NACA has conducted an extensive investigation of the pressure distribution over various surfaces of a 0.2375-scale model of that airplane. The investigation was requested by the Army Air Forces, Materiel Center, and was conducted in the 19-foot pressure tunnel at Langley Memorial Aeronautical Laboratory.

Pressure distribution measurements were made at angles of yaw from -10° to 10° and at angles of attack from -8° to 8° to determine:

- (1) pressures acting on the cowl with and without spinner, on the nacelle, and on the fuselage
- (2) the effect of flaps on the pressure distribution over the nacelle and fuselage at 0° yaw
- (3) the loads and hinge moments on the main-wheel, nose-wheel, and bomb-bay doors at various door angles
- (4) the loads acting on the upper and lower two-gun turrets

The load and hinge-moment data for the various doors are of particular interest because it is believed that this is the first time such complete information has been made available.

APPARATUS AND TESTS

The principal dimensions of the 0.2375-scale model of the Douglas XA-26 airplane are shown in figure 1. The model was tested as shown there except for one configuration with the spinner removed. All pressuredistribution tests were made with the propellers off.

The method of mounting the model in the wind tunnel is shown in figure 2(a) (yaw support on which all surfaces were tested) and figure 2(b) (normal supports where the

Ý.

tests were made on the bomb-bay door because of the severeinterference effects between the yaw strut and the door). The tests were made in the 19-foot pressure tunnel which has a closed circular test section.

The model is of all-metal construction following very closely the lines of its prototype. As tested, it was sprayed with several coats of lacquer, sanded, and waxed to produce a smooth finish. The pressure orifices were installed in such a way that clean, smooth orifices flush with the surface of the model were produced.

Simultaneous measurement of the pressure acting at every orifice could not be obtained because of the great number of orifices (nearly 1000) and the limitation of handling but 120 orifices at one time. Consequently, various surfaces were tested individually; for example, measurements were made on the spinner and cowl, then the forward part of the nacelle, and lastly the aft part of the nacelle. For ease in changing from one surface to another, headers for each surface were located in the fuselage and were accessible through the bomb bay.

From one side of the headers, which were small flat plates, suitable tubes lead to the surface of the model. To the other side a similar flat plate was bolted which contained copper tubes that extended from the model to the control room below. In the control room the tubes were connected to two multiple-tube manometers.

Simultaneous records of the pressures acting on a particular surface were obtained by photographing each manometer. In order to provide a reference line on each record one tube on each manometer was connected to the reference pressure which for these tests was the static pressure in the tunnel test section.

The locations of the pressure orifices on the spinner-cowl-nacelle assembly are shown in figure 3. Figure 4 locates the orifices on the fuselage and on the General Electric two-gun turrets. Figures 5, 6, and 7 show the orifice locations on the left outboard main-wheel, left nose-wheel, and left bomb-bay doors.

By locating orifices on both surfaces of the doors an accurate picture of the forces acting on them is obtained. If the internal pressures on the model

and the airplane are similar, correlation between windtunnel and flight data should be good when the doors are closed. As soon as the doors are opened, a similar condition exists between the model and the airplane and thus the internal pressures should be the same. Only on the doors were the internal pressures of the model taken into account.

All tests were made at a tunnel airspeed of approximately 95 miles per hour with the exception of the cowl tests with the spinner removed which were made at approximately 78 miles per hour. It was necessary to drop the tunnel airspeed in order to record the peak pressures on the manometer.

In general, pressure-distribution measurements over the various surfaces were obtained through an angle-of-attack range from -8° to 8° and at yaw angles from -10° to 10°. The tests herein reported were made with the air in the tunnel compressed to 35 pounds per square inch absolute and are listed in detail in table I.

SYMBOLS AND METHOD OF ANALYSIS

The coefficients and symbols used in this report are defined as follows:

p/q pressure coefficient

CL lift coefficient, L/qs (corrected for supporttare and interference effects)

R Reynolds number, ρVc/μ

Mach number, V/Vs

where

p static pressure difference between the model surface and free stream


q dynamic pressure, $\frac{1}{2}\rho V^2$

```
lift
L
        wing area (30.488 sq ft)
S
        mean aerodynamic chord (1.930 ft)
C
        mass density of air
v
        airspeed
        coefficient of viscosity of air
μ
Vs
        sonic velocity
and
a t
        geometric angle of attack of model fuselage
          with respect to centerline of tunnel
¥
        angle of yaw, degrees
        flap deflection, degrees
Ōρ
        door deflection, degrees
```

Subscripts

m main-wheel doorn nose-wheel doorb bomb-bay door

The following example illustrates the method used to obtain the door moments and loads:

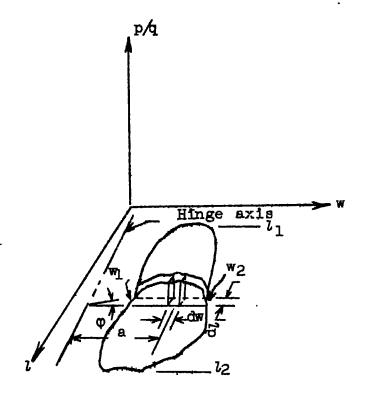

$$\Delta F = q \int_{w_1}^{w_2} \frac{p}{q} dw$$

$$F = \int_{l_1}^{l_2} \Delta F dl \qquad \text{or} \qquad F = q \int_{l_1}^{l_2} \int_{w_1}^{w_2} \frac{p}{q} dl dw$$

$$\Delta M = q \int_{w_1}^{w_2} \frac{p}{q} \, d \cos \varphi \, dw$$

$$M = \int_{l_1}^{l_2} \Delta M dl \qquad \text{or} \qquad M = q \cos \phi \int_{l_1}^{l_2} \int_{w_1}^{w_2} \frac{p}{q} \text{ adldw}$$

where

F door load

M door hinge moment



- length of door parallel to the vertical plane of the fuselage reference line
- w width of door perpendicular to l
- a distance from hinge axis to centroid of pressure diagram angle between hinge axis and orifice
- φ angle between hinge axis and orifice row

Graphical solutions of the equations for door loads and hinge moments were obtained by plotting the values of p/q in each orifice row perpendicular to the appropriate plane against the distance of each orifice from the hinge axis. In the case of the left outboard main-wheel door, an average plane was taken which passed through the hinge axis and the outer edge of the door. For the left nose-wheel door a plane was chosen parallel to the outer flat surface of the door. Two planes were used with the left bomb-bay door, one parallel to the outer flat surface of the door and the other perpendicular to the first plane. The use of two planes for the bomb-bay door gave the normal and transverse moments and loads, respectively.

The section loads and moments were obtained from the pressure diagrams by means of a mechanical integrator and were plotted against the distance from the leading edge of the door to each orifice row. The area under the section moment and load curves was again integrated to obtain values of total door load and hinge moment.

For convenience in obtaining a graphical solution of the moments on the nose-wheel door, the cos ϕ term was neglected. Thus the moments are in error by about 1.0 percent.

In this report the door loads and hinge moments per unit dynamic pressure are presented against door length. Positive values of the loads and moments were arbitrarily chosen to mean that the forces acting tended to close the door.

Pressure orifices were located on only one-half of the upper and lower gun turrets; thus it was necessary to assume symmetry and use data from both positive and negative angles of yaw to obtain the loads for a particular angle of yaw.

The turret loads are given by the following expressions:

-(1) Vertical load

$$F_{v} = q \int_{0}^{R} \int_{0}^{2\pi} \frac{p}{q} r dr d\epsilon$$

(2) Side load .

$$F_{s} = q \int_{0}^{h} \int_{0}^{l_{t}} \frac{p}{q} dh dl_{t}$$

(3) Longitudinal load

$$F_{l} = q \int_{0}^{h} \int_{0}^{w_{t}} \frac{p}{q} dh dw_{t}$$

where

R maximum radius of turret

r radius of turret at any orifice row (orifice rows lie in planes which are perpendicular to the axis of rotation of the turret)

angular displacement of orifices as seen from a top or bottom view of the turret in question

h height of turret

lt length of turret (measured along the longitudinal axis of the model)

wt width of turret perpendicular to lt

The equation for vertical loads was solved graphically by plotting values of p/q against the circumference of the turret at every row of orifices. Integration of these pressure diagrams gives values of section load which when plotted against the maximum radius of the turret and again integrated solve the equation.

In like manner the equations for side and longitudinal loads are solved by plotting p/q against the appropriate diameter of the turret, integrating these curves, plotting the section loads against the height of the turret and, by again integrating, the total loads are obtained.

All turret loads are measured with respect to the body axis of the model and are presented as loads per unit dynamic pressure. Positive vertical loads are compressing loads parallel to the axis of rotation of the turret. Side loads are measured perpendicular to a vertical plane through the fuselage reference line and are positive to the right. Longitudinal loads are parallel to the vertical plane of the fuselage reference line and are positive aft.

Vertical, side, and longitudinal loads were obtained for the upper turret but due to asymmetrical orifice locations on the lower turret only vertical loads are presented.

Accuracy

Individual pressures could be read from the photographs to ±0.1 cm. Values of p/q are accurate to within 0.001.

The accidental errors that exist in the final loads and hinge moments are due to fairing curves and integrating these curves. From the results of the total door loads and hinge moments it would appear that these are about 0.01/q for the loads and 0.002/q for moments.

RESULTS AND DISCUSSION

In order to estimate the lift coefficient at which the tests were made, figure 8 is presented. The lift

coefficient has been plotted as a function of geometric angle of attack at 0° yaw because the geometric angle of attack remains constant throughout the yaw range.

Spinner-cowl-nacelle assembly and fuselage. - Values of the external pressure coefficient, p/q, for the spinner-cowl-nacelle assembly and the fuselage are shown in figures 9(a) through 20(e). Presentation of data in this manner is rather unusual but it was used because it not only gives the value of p/q at each orifice, but provides for easy comparison with the pressures acting at other orifices in the same vicinity. For a particular model attitude all the pressures acting on the unit can be obtained from one diagram.

The pressures measured on the spinner, cowl, and nacelle are presented for the following angles of yaw: -10°, figure 9; -5°, figure 10; 0°, figure 11; 5°, figure 12; 10°, figure 13; and 0° with wing flaps deflected 55°, figure 14. At each angle of yaw the results are given for an angle-of-attack range from -8° to 8°. The cowl-alone data are presented on the same diagrams as the spinner-cowl-nacelle pressures at 0° yaw, figure 11. For all tests made with the spinner in place the cowling-entrance-velocity ratio V₁/V was approximately 0.28. The entrance-velocity ratio was not measured when the spinner was removed.

The fuselage pressures including the wing fillet and the upper and lower turrets are shown for angles of yaw from -10° to 10° at angles of attack from -8° to 8° in figures 15(a) through 19(e). Values of p/q over a portion of the fuselage with the flaps down at 0° yaw are shown in figure 20.

These diagrams indicate that no critical pressures should be encountered in the high-speed level-flight condition of the airplane at 17,000 feet, unless the spinner is removed. When the spinner is removed critical pressures occur at 265 miles per hour.



-- The following table lists some values of the critical pressures on the spinner-cowl-nacelle assembly and on the fuselage:

Surface	fig.	Ψ (deg)	a' (deg)	đ Đ	Critical M (2)	Critical velocity at 17,000 ft (mph)	
Cowl with spinner	9(a)	-10	4 .	-2.09	0.46	330	
Cowl alone	11(a)	. О	÷8	-4.82	.32	230	
Cowl with spinner	11(e)	o	0	66	.65	466	
Cowl alonel	11(e)	0	0	-3.54	-37	265	
Nacelle	13(e)	10	8	-2.42	c.43	309	
Nacelle 8 = 550	llı(e)	0	8	-3.30	•39	273	
Nacelle ¹	11(e)	0	O	- •55	.68	488	
Fuselage (fillet)	19(e)	10	8	-4.46	•33	237	
Fuselage 6f.≒ 55°	20(e)	0	8	-2.71	.41	294	
Fuselage (upper turret) ¹	17(e)	0	0	 75	.63	452 ·	

^lHigh-speed level-flight attitude,

The values of critical Mach number presented in the table have been estimated by the von Karman-Tsien relation from low-speed pressure coefficients.

Main-wheel, nose-wheel, and bomb-bay doors.-Diagrams of the pressures acting on the main-wheel door, nose-wheel door, and bomb-bay door for a few representative cases are presented in figures 21, 22, and 23. The main-wheel and nose-wheel door pressures are shown for four door angles from closed to full open at μ^0 angle of attack and yaw angles of -10° , 0° , and 10° . The bomb-bay-door diagrams represent the results of tests made at 0° yaw, -3° , $-\mu^{\circ}$, 0° , μ° , and 8° angles of attack, and door angles of 0° , 10° , and 60° . These pressure diagrams are presented to give a picture of how various door attitudes affect the pressures. They are not intended to be used for determining exact values of p/q.

Section moments (lb-ft per ft of length/q) and sections loads (lb per ft of length/q) for the three doors are presented in figures 24 through 29. These curves are particularly valuable in showing how the moments and loads vary along the length of each door. As might be expected, at the higher door angles, the curves near the leading edge of the door are very erratic.

Figures 30 and 31 present the total moments and loads for the main-wheel and the nose-wheel doors. The total moments and the normal and transverse loads on the bomb-bay door are presented in figure 32. It is of interest to note the similarity of results for the main-wheel and the nose-wheel doors. The magnitude of the moments and loads are different, but the slope and displacement of the curves are very much alike. The results indicate that throughout most of the range tested the nose-wheel door will tend to close but the main-wheel and bomb-bay doors tend to open due to the aerodynamic loads.

Turret loads. The vertical loads on the upper and lower-gun turrets and the longitudinal and side-force loads on the upper turret are given in table II. Some of the values of total loads on the turrets, especially the side load and longitudinal loads, do not appear as would be expected. For example, the side load on the upper turret at 0° yaw is 0 because symmetry was assumed, at -10° yaw the side loads are negative while at -5° yaw they are positive when it would appear that they should be negative. Considering the same limit of accuracy for the turret as set up for the door loads (0.01/q) the results lie within the experimental accuracy of the measurements.

Scale factor. All results in this report are given in terms of the model. To change from model to airplane loads and moments the scale factor must be taken into account. For example, suppose the total load and the total hinge moment were desired on the airplane nose-wheel door for the following conditions:

$$q = 300 \text{ lb/sq ft}; \theta_n = 0^{\circ}; \psi = 0^{\circ};$$

and $\alpha' = 0^{\circ}$. Figure 31 gives the values of the model load and moment at $\theta_n = 0^{\circ}$, $\psi = 0^{\circ}$, and $\alpha' = 0^{\circ}$. Multiply these values by the desired airplane q (300 lb/sq ft) and by (1/model scale)³ for moments and (1/model scale)² for loads.

M(airplane) = M/q (model) × 300 ×
$$\left(\frac{1}{0.2375}\right)^3$$

= 0.0232 × 300 × 74.62
= 518 lb-ft
F(airplane) = F/q (model) × 300 × $\left(\frac{1}{0.2375}\right)^2$
= 0.107 × 300 × 17.72
= 569 lb

CONCLUSIONS

Pressure-distribution measurements of the model indicate that:

1. In the airplane's high-speed level-flight condition at 17,000 feet no critical pressures should be encountered unless the spinner is removed. With the spinner removed, critical pressures were reached on the covl at 265 miles per hour.

- 2. Throughout most of the range tested the nosewheel door tends to close, whereas the main-wheel and bomb-bay doors tend to open due to the aerodynamic loads.
- 3. The longitudinal and side loads on the upper turret are small and generally lie within the experimental accuracy of the measurements.

Langley Memorial Aeronautical Laboratory,
National Advisory Committee for Aeronautics,
Langley Field, Va., October 2, 1943.

Table I Tests and Figures

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

<u> </u>			An	gle of	yaw,	deg				0		Approx			<u> </u>
Surface	α'≟-8°	α'=-6°	œ ′= -4°	α'=-2°	α'= 0°	α'= Z°	α'= 4°	α'= 6'	∞′=8°	Door Angle,deg	6f (deg)		R	М	Figs
spinner, cowl, and nacelle	0,	o	-10,-5, 0, 5,10	0	-10,-5, 0, 5,10	0	-10,-5, 0, 5 , 10	0	-10,-5, 0, 5,10		0	95	3.89 x10 ⁶	QIZ	9- 13
Cowl with spinner off	0	o	0	o	0	o	o	О	o		0	79	3.30	.10	//
nacelle	0	_	0	_	0	_	o	~	0	_	55	90	3.72	.IZ	14
fuselage	-10,-5, 0, 5,10	o	-10,-5, 0, 5,10	0	-10,-5, 0, 5,10	o	-10,-5, 0, 5,10	0	-10,-5, 0, 5,10		0	95	3.98	.12	15- 19
fuselage	0	-	o	1	0	_	0		o		5 <i>5</i>	89	3.75	.12	20
main wheel door	-10,-5, 0, 5,10	0	-10, -5, 0, 5, 10	0	-10,-5, .0, 5,10	o	-/0,-5, 0, 5,/0	o	-10,-5, 0, 5,10	o	0	94	3.9 <i>9</i>	.12	21
main wheel door	_		-10, 0,10		-10, 0,10	~	-10, 0,10		-10, 0,10	1,3	0	94	3.98	./2	24 25 30
main wheel door	_	_	-/0,-5, 0,5,10	_	-10,-5, 0,5,10	_	-/0,-5, 0,5,/0	_	-10,-5, 0,5,10	5,10,30, 50,72	0	94	3.9 <i>4</i>	.12	
nose wheel door	-10,-5, 0, 5 ,10	0	-10,-5, 0, 5,10	0	-10,-5, 0, 5,10	o	-10,-5, 0, 5,10	0	-10,-5, 0. 5,10	o	0	94	4.04	.12	22
nose wheel door		—	-10, 0,10	_	-10, 0,10		-10, 0,10		-10, 0,10	1,3	0	95	4.04	.ız	26 27 31
nose wheel	-	-	-10,-5, 0,5,10	_	-10,-5, 0,5,10	_	-10,-5, 0,5,10	_	-10,-5, 0,5,10	5,10,30, 60,86	0	95	3. <i>92</i>	.12	
*	o	0	o	0	0	0	0	0	0	0	0	96	3 .64	.IZ	25 28 29
*	0		0	_	0		0	_	0	1,3,5,10,40, 60,88.1	0				32

* bomb bay door tested on normal supports

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

Table II
Loads on Upper and Lower Turrets

	1 -4	/	<u> </u>						
Type of	1 1/2	\propto'	Magnitude						
load	(deg)	(deg)	of load						
		, ,	(lb/q)						
Upper turret									
	(-8	-0.029						
	[] ·	-4	- 0.028						
Side	-/04	Ö	-0.024						
		4	-0.004						
	U	8	0						
		-8	0.001						
_		-4	0.002						
Side	-5	0	0.003						
		4	0.004						
	L	8	0.004						
		-8	0.018						
	الما	-4	0.017						
Longitudinal	<i>-10</i>	0	0.017						
		<i>4</i> 8	0.017 0.013						
		-8	0.013						
		-4	0.020						
Longitudinal	-5 🗸	0	0.018						
Lerry recurrer		4	0.018						
	l U	8	0.014						
	(4 8 8 -4	0.011						
		-4	0.010						
Longitudinal	0 4	0	0.009						
		4	0.020						
	ļŲ	8	0.018						
		-8	-0.186						
	ال ا	-4	-0.211						
Vertical	~101	0	-0.232						

Type of	*	α'	Magnitude
load	(deg)	(deg)	of load
	` "		(1b/q)
11	per	turre	
-		4	-0.2.50
	i l	8	-0.262
	7	-8	-0.172
•		-4	-0.195
Vertical	-51	Ô	-0.218
		4	-0.238
		8	-0.247
		-8	-0.136
		-4	-0.178
Vertical	0 {	0	-0.199
		<i>4</i> 8	-0.249
	<u> </u>		-0.267
	ower	turre	27
		-8	-0.073 -0.043
Mandraul		- 4	-0.067
Vertical	-10 {	4	-0.065 -0.064
			-0.059
		8 -8	-0.05Z
]. []	-4	-0.052
Vertical	-5 {	ó	-0.055
		4	-0.054
	l (8	-0.047
	• 1	-8	-0.049
		-4	-0.037
Vertical	0	0	-0.030
		4	-0.029
,	l l	8	-0.025

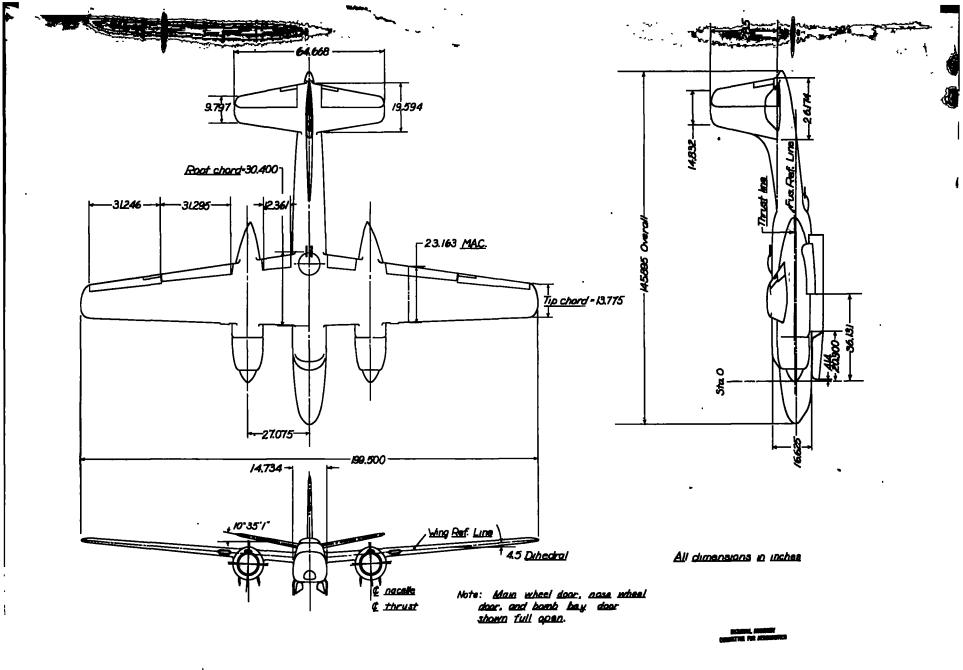


Figure 1 - Plan and elevations of the 0.2375-scale model of the Dauglas XA-26 airplane.

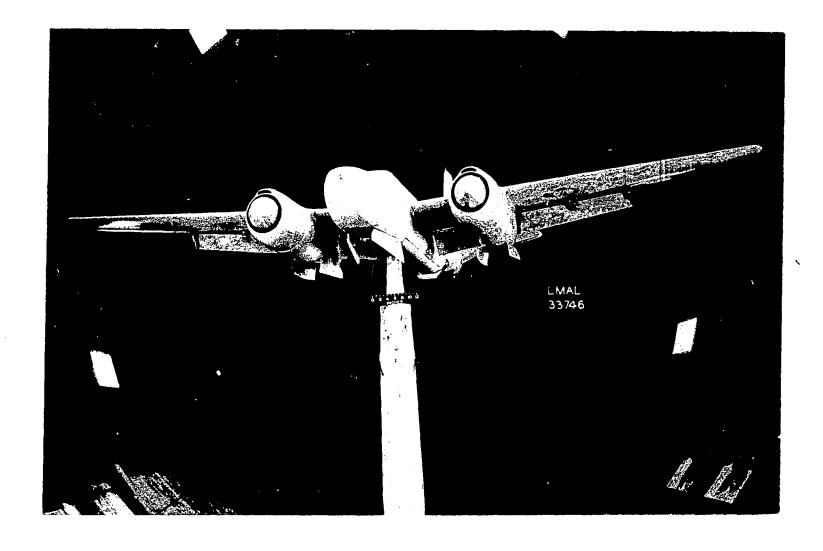


Figure 2(a).- 0.2375-scale model Douglas XA-26 airplane on yaw support with wheel doors full open and wing flaps deflected 55°.

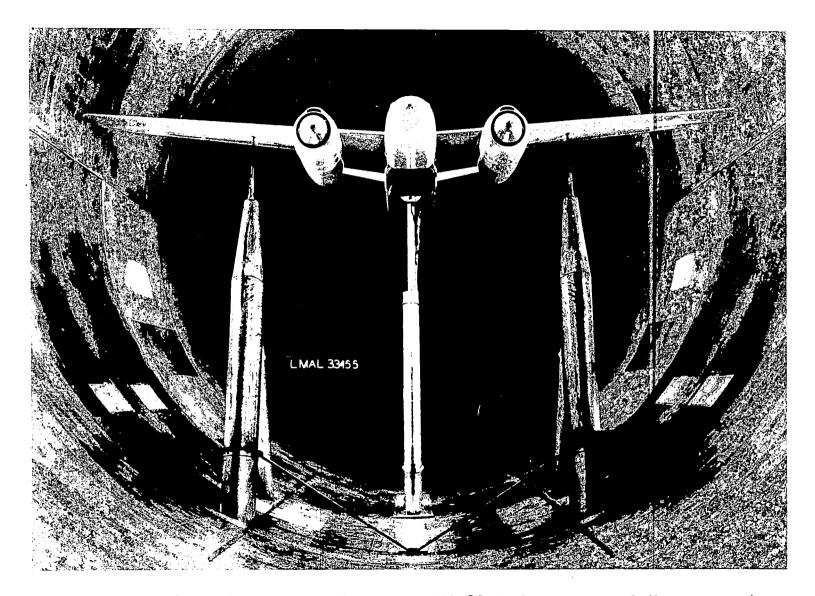


Figure 2(b).- 0.2375-scale model Douglas XA-26 airplane on normal, three-support system with bomb-bay doors full open.

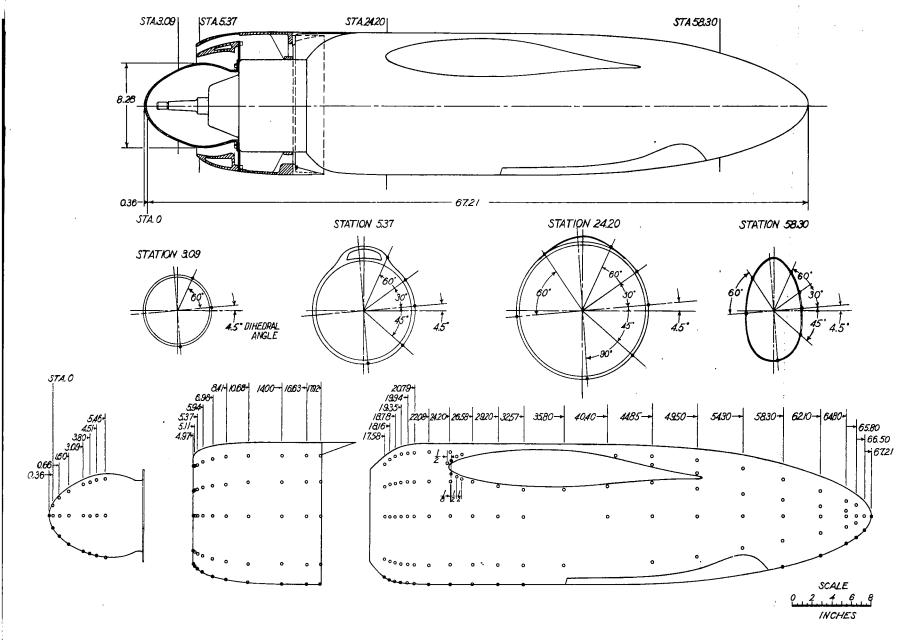


Figure 3.-Location of orifices on spinner, cowl, and nacelle of 0.2375-scale model Douglas XA-26 airplane

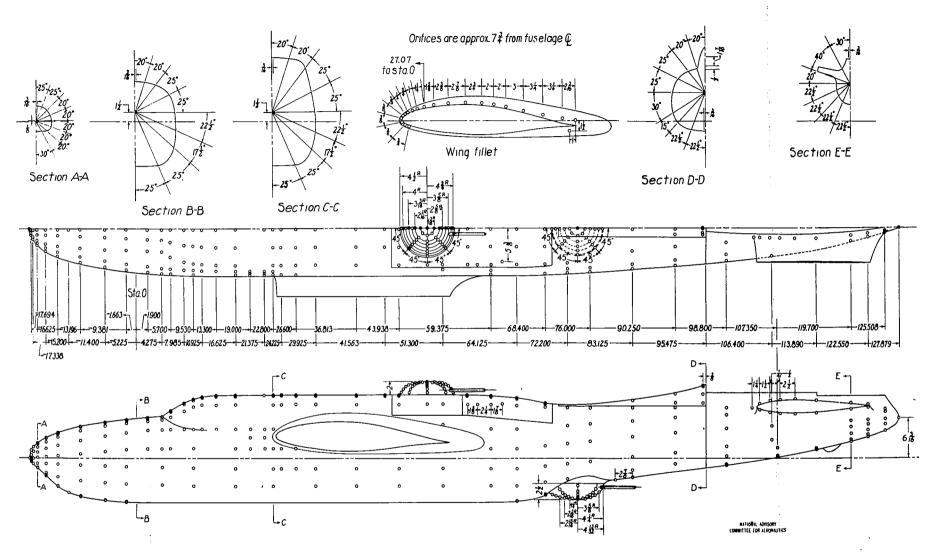


Figure 4.-Location of orifices on fuselage of 0.2375-scale model of Douglas XA-26 airplane

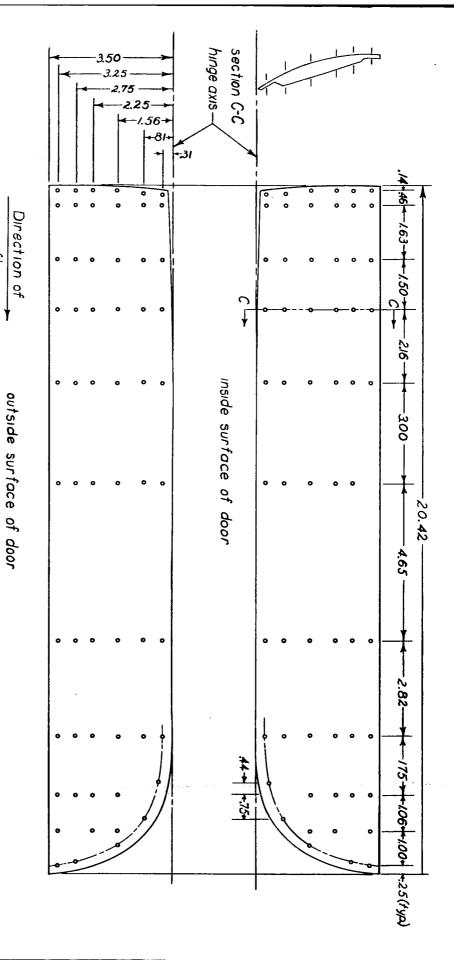


Figure 5 - Location of orifices on main wheel door of 0.2375-scale model Douglas XA-26 airplane

air flow

. .

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

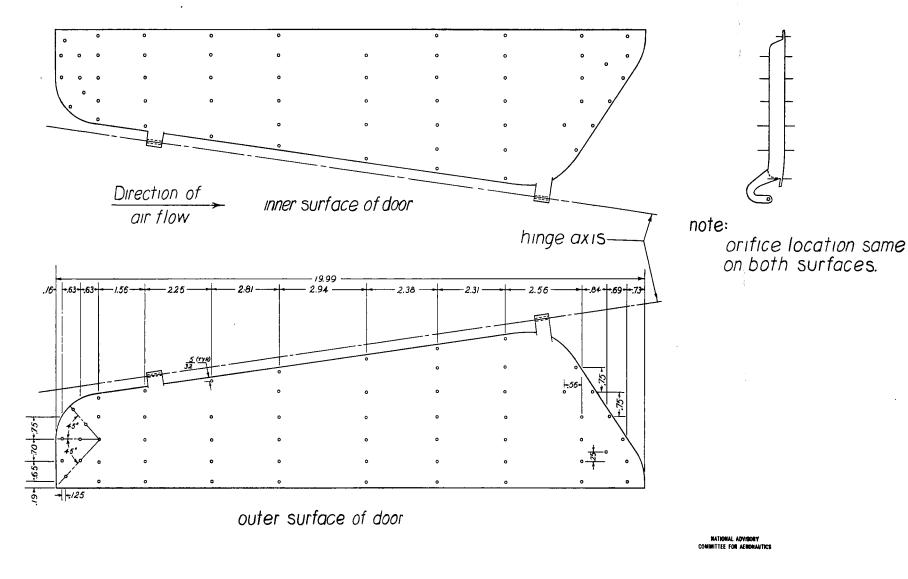


Figure 6-Location of orifices on nose wheel door of 0.2375-scale model Douglas XA-26 airplane

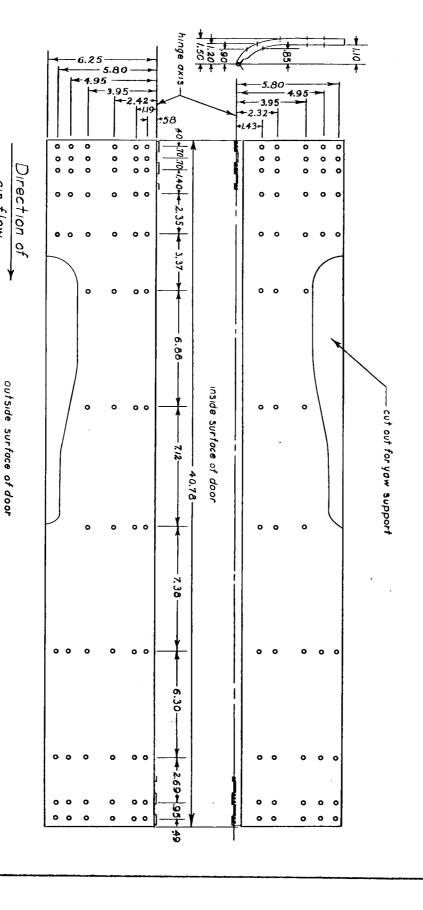
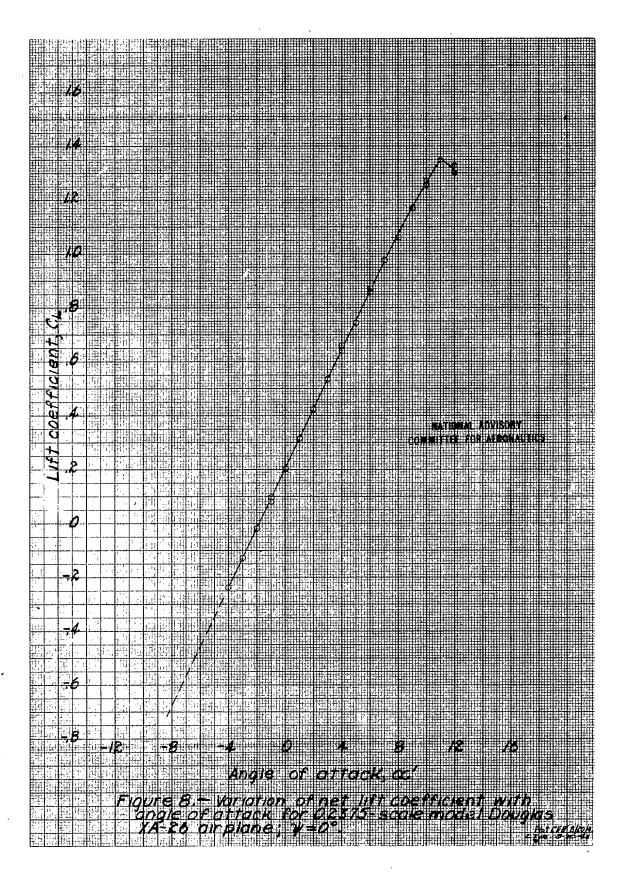


Figure 7.—Location of orifices on bomb bay door of 0.2375-scale model Douglas XA-26 airplane

air flow

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS



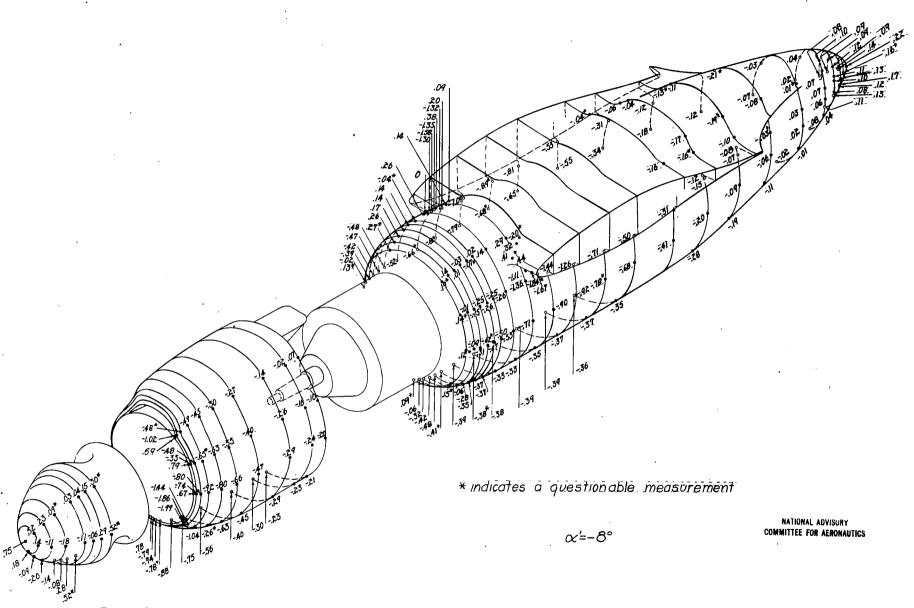


Figure 9a.—Pressure coefficients p/q on spinner, cowl, and nacelle of 0.2375—scale model Douglas XA-26 airplane; $\psi=-10^\circ$; $q\approx 50$ lb/sq ft; $R\approx 3$,900,000; $M\approx 0.12$.

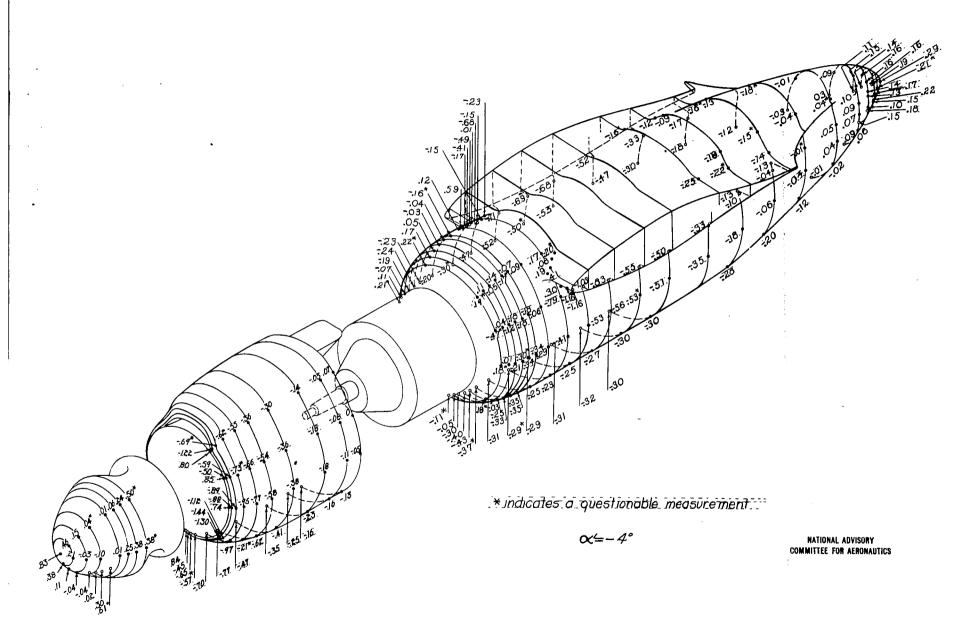


Figure 9b-continued

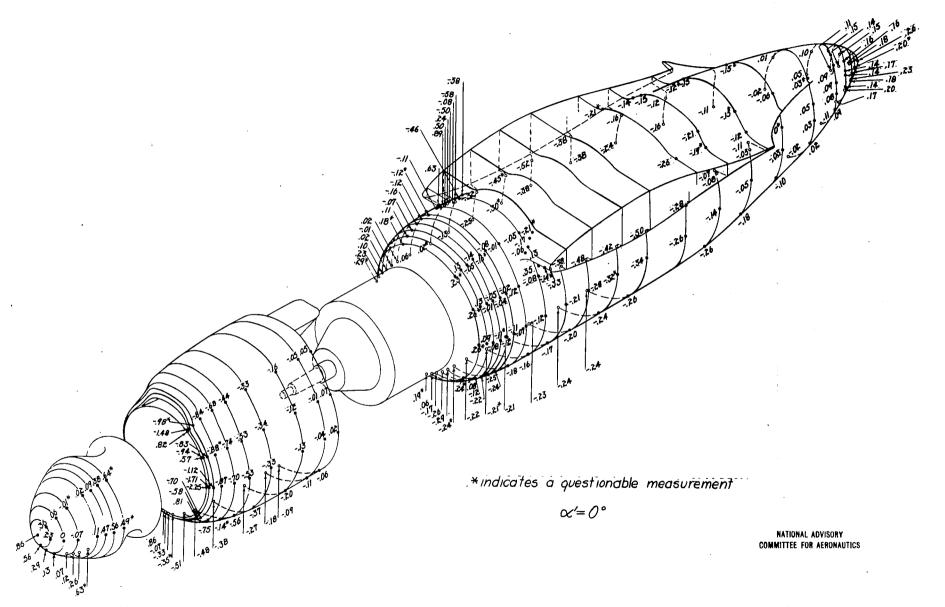


Figure 9c.—continued

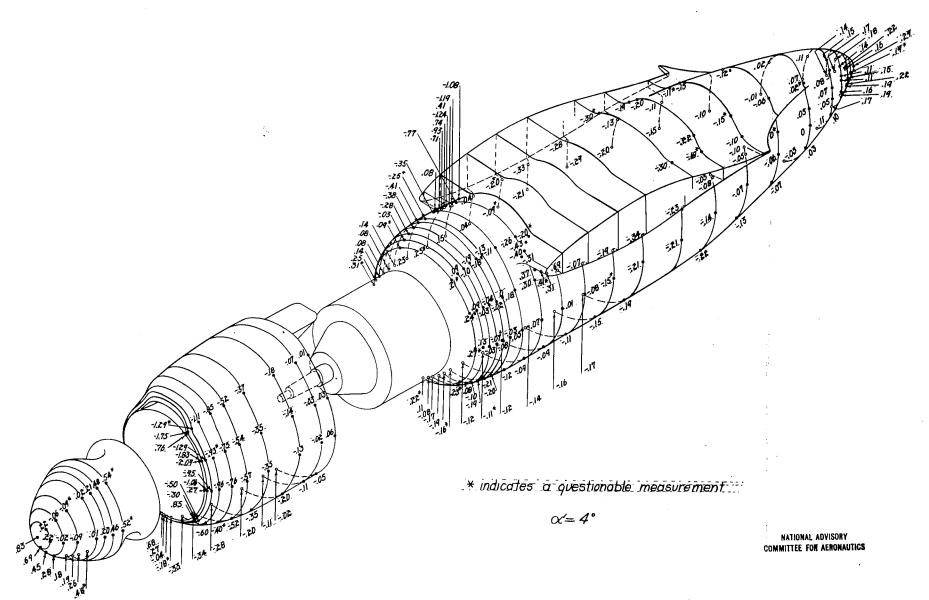


Figure 9d.—continued

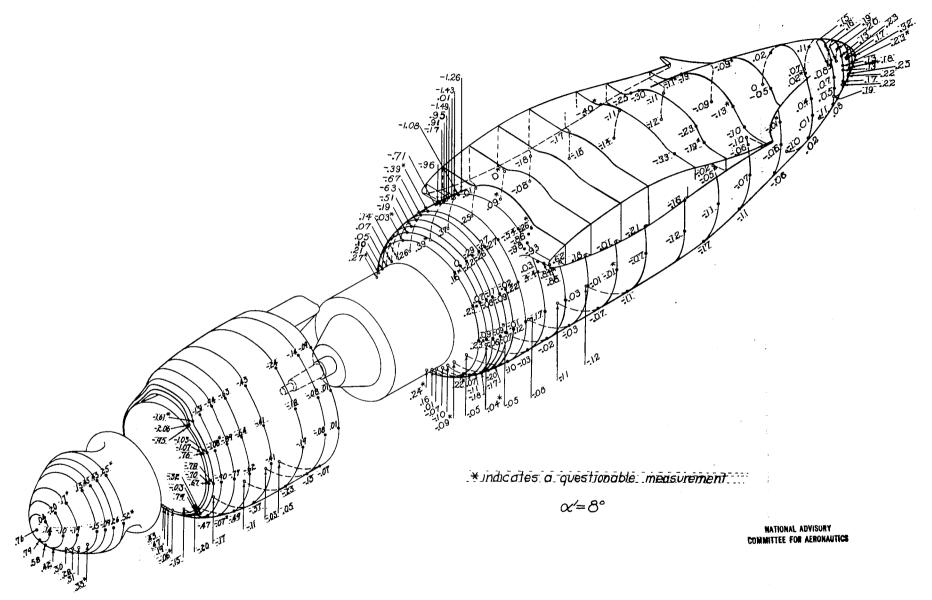


Figure 9e.—concluded

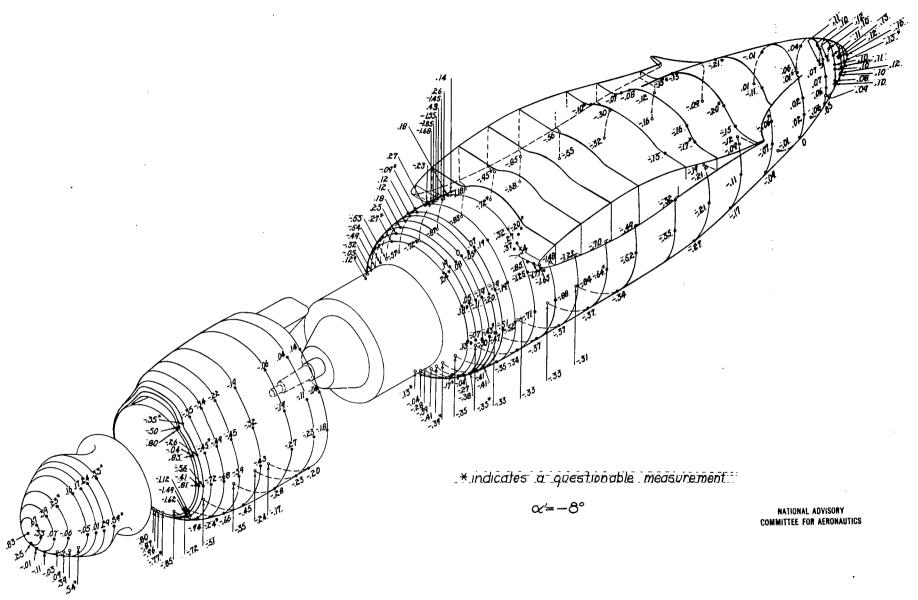
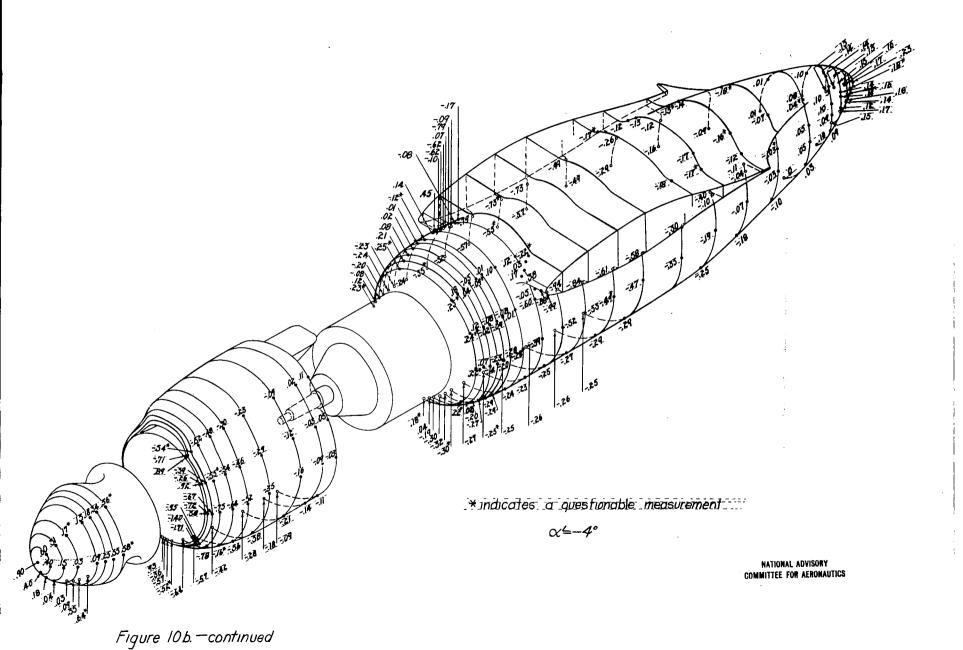


Figure 10a — Pressure coefficients p/q on spinner, cowl, and nacelle of 0.2375 — scale model Douglas XA-26 airplane; $\psi=-5^\circ$; $q\approx50$ lb/sq ft; $R\approx3$, 910,000; $M\approx0.12$.



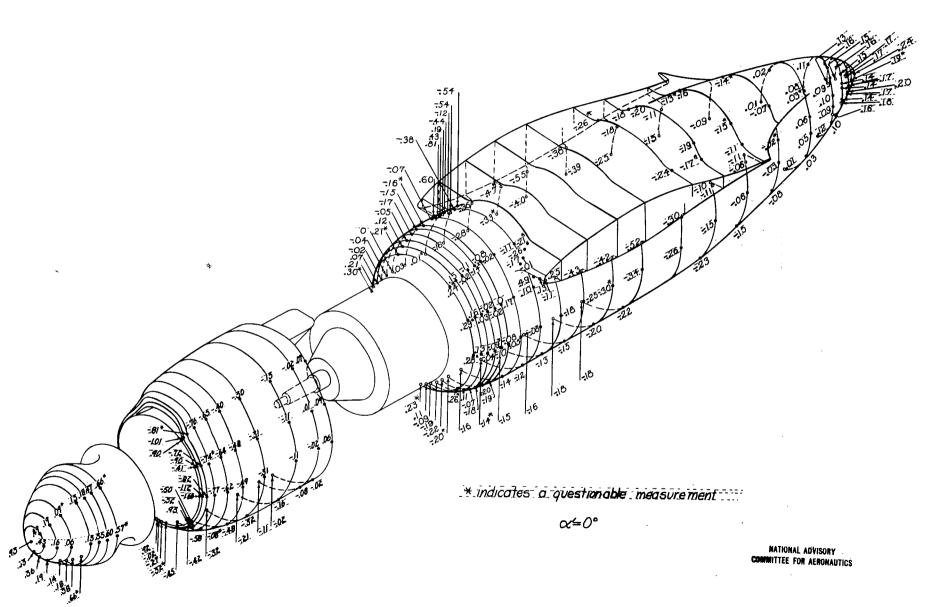


Figure 10 c. — continued

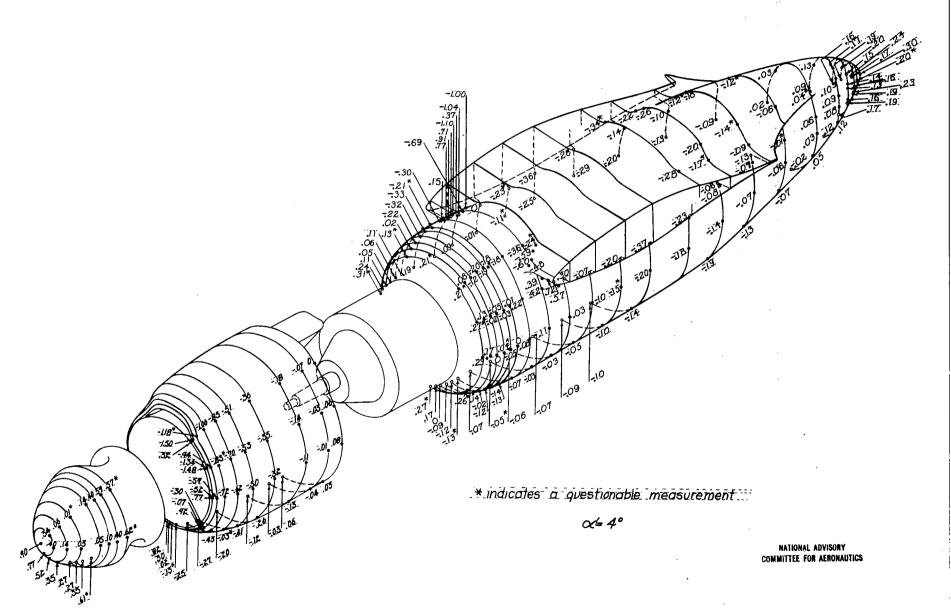


Figure 10d.—continued

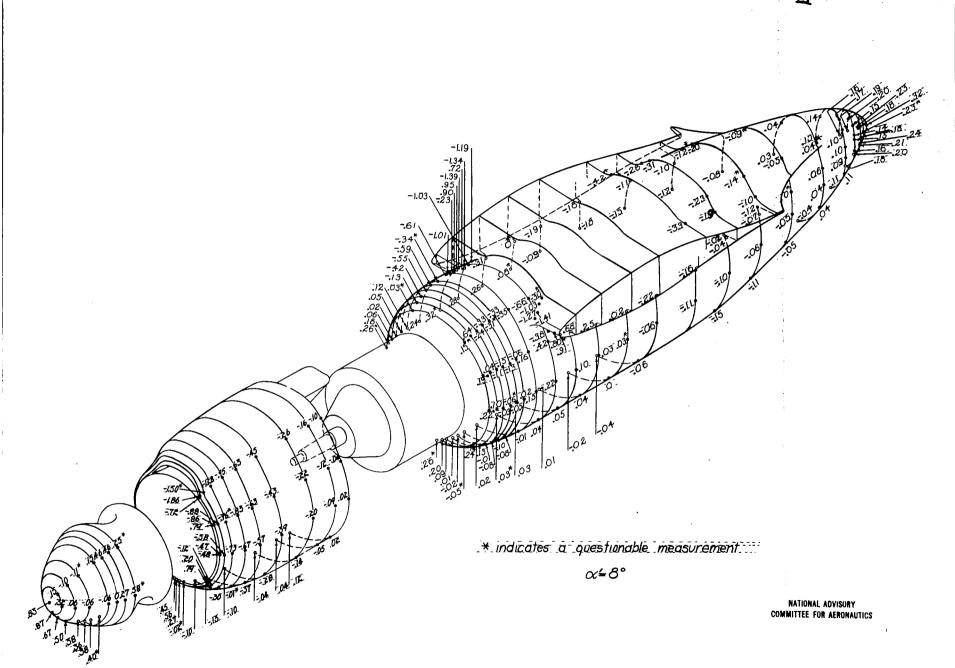


Figure 10 e. — concluded

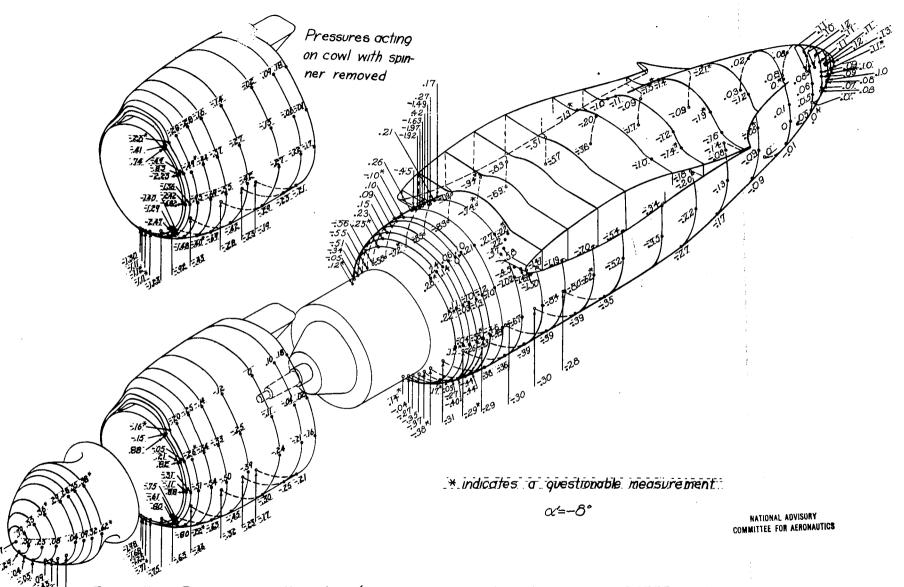
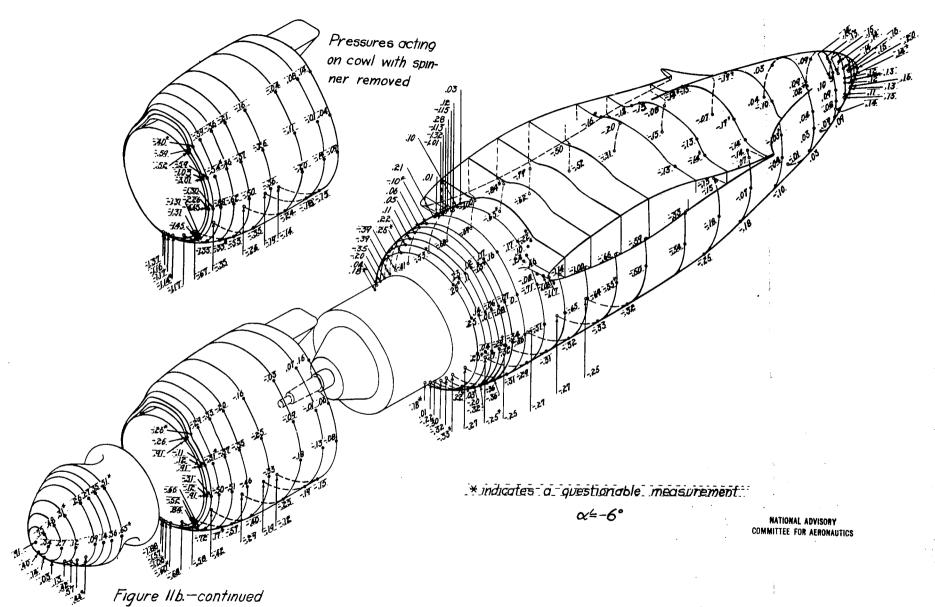
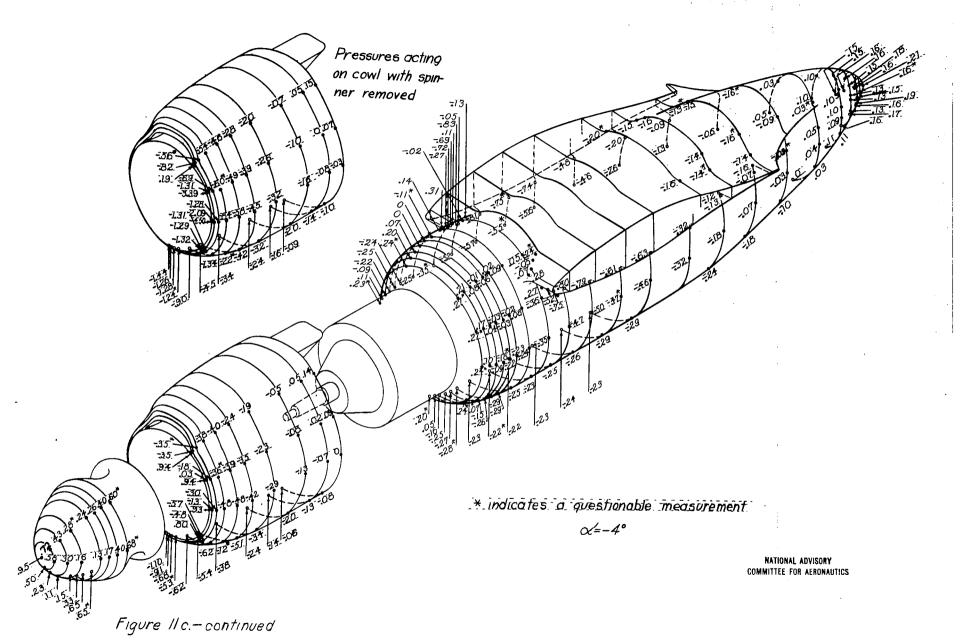
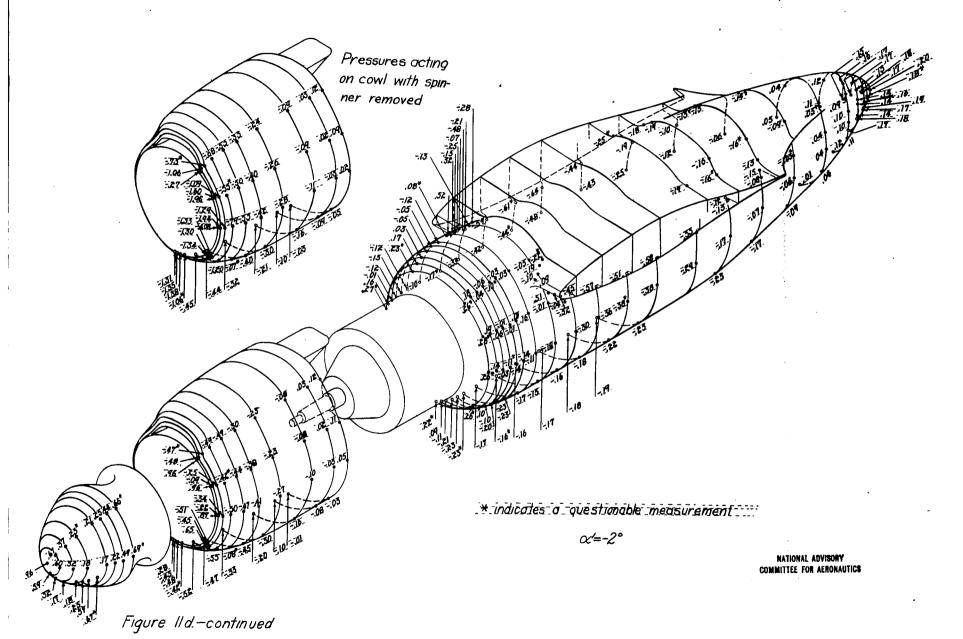
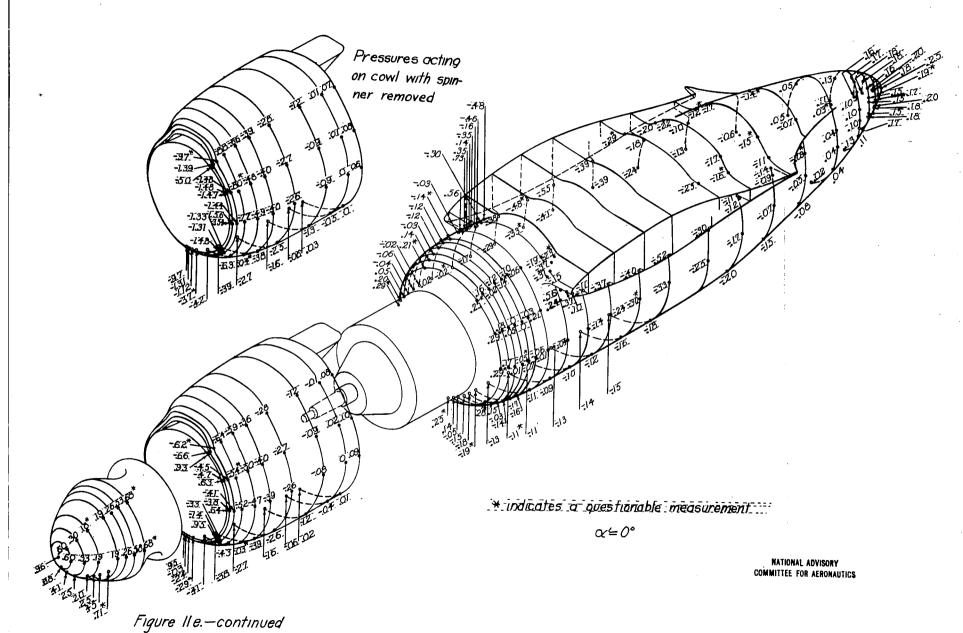



Figure II a.—Pressure coefficients p/q on spinner, cowl, and nacelle of 0.2375-scale model Douglas XA-26 airplane; $\psi=0^\circ$. Test conditions with spinner installed; $q\approx50$ lb/sqft; $R\approx3,880,000$; $M\approx0.12$. Test conditions with spinner removed; $q\approx35$ lb/sqft; $R\approx3,300,000$; $M\approx0.10$.












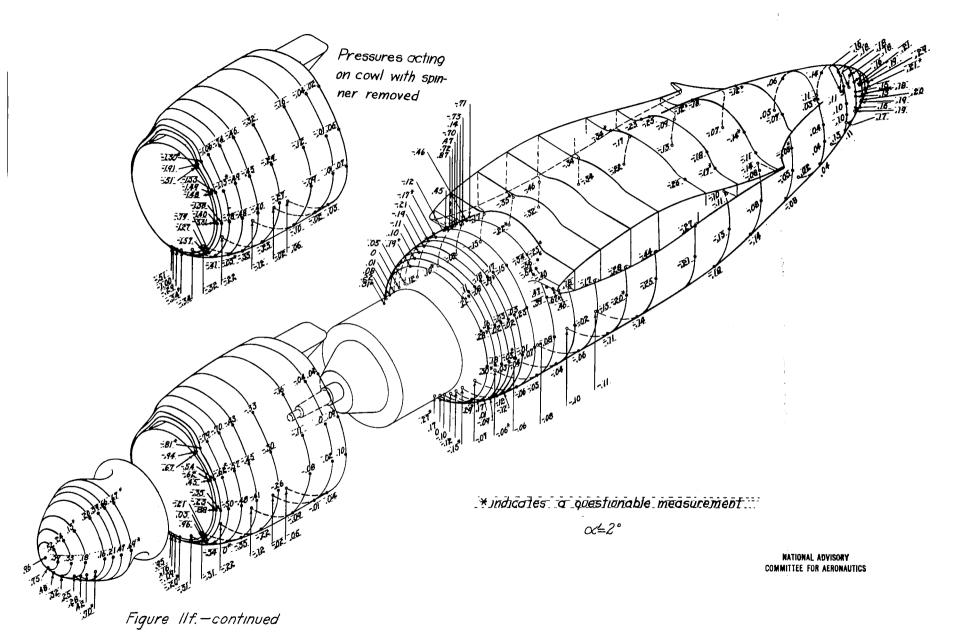

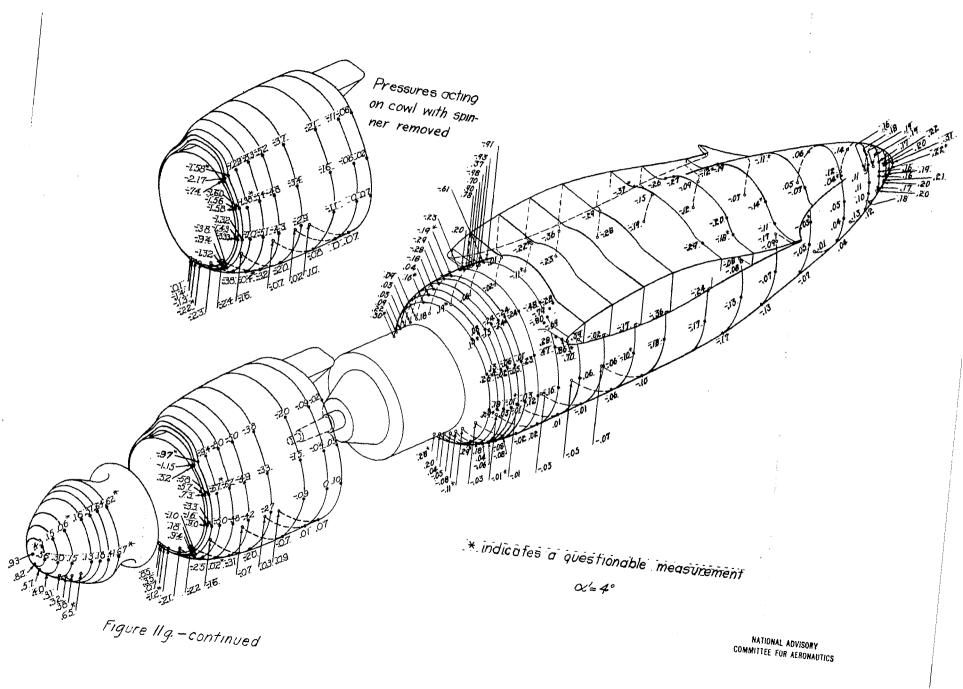

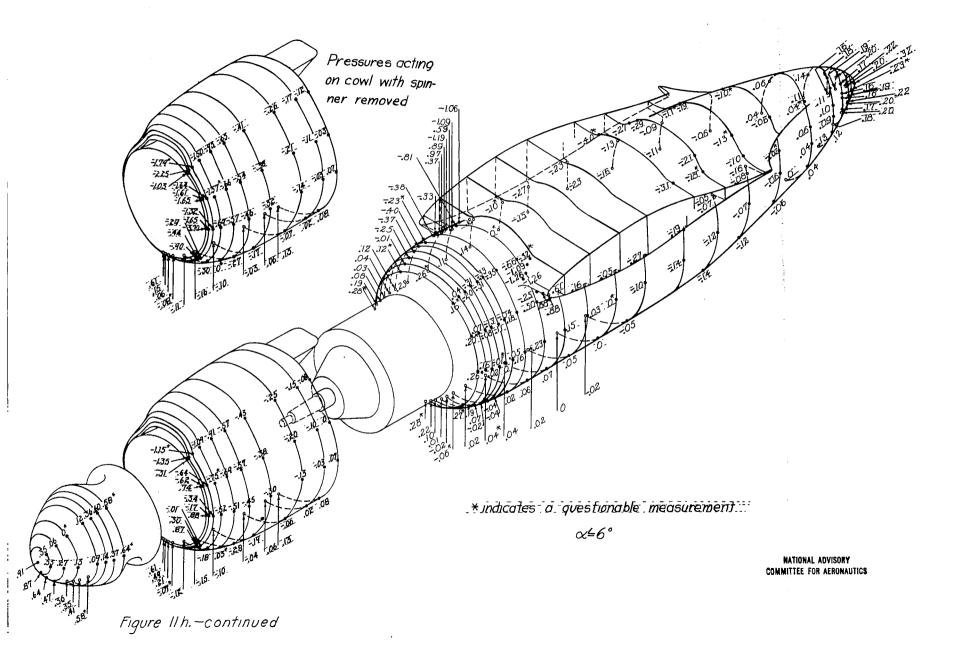

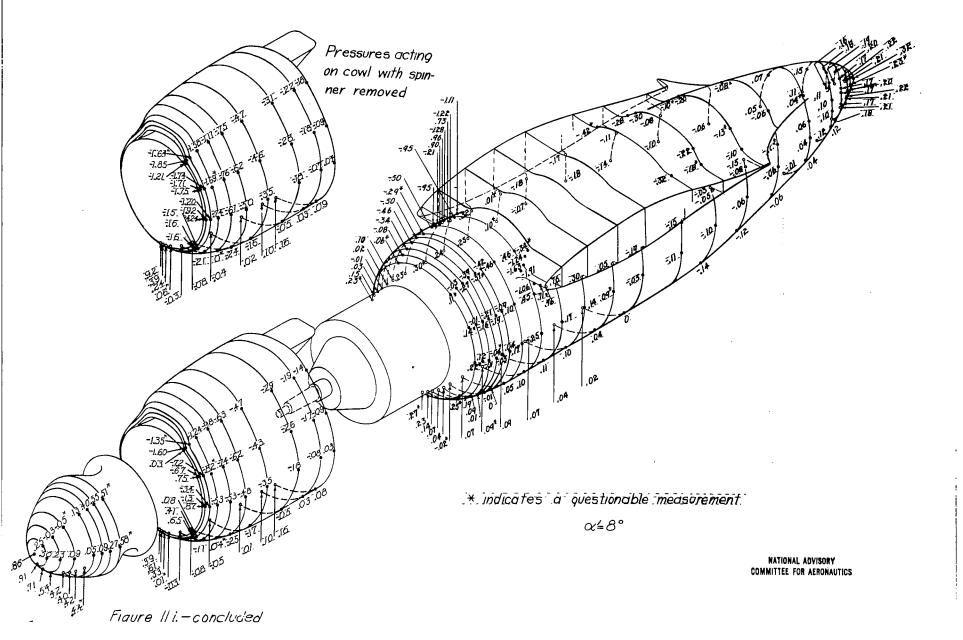

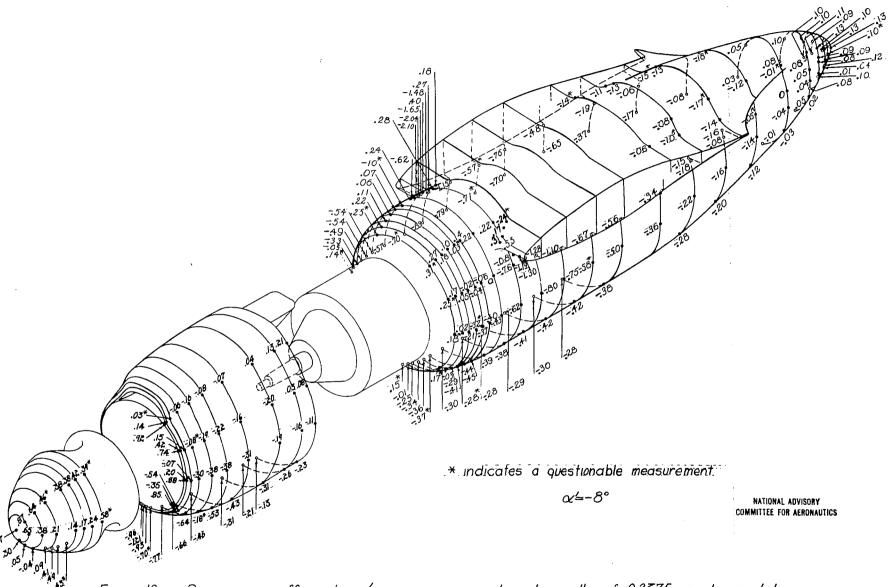
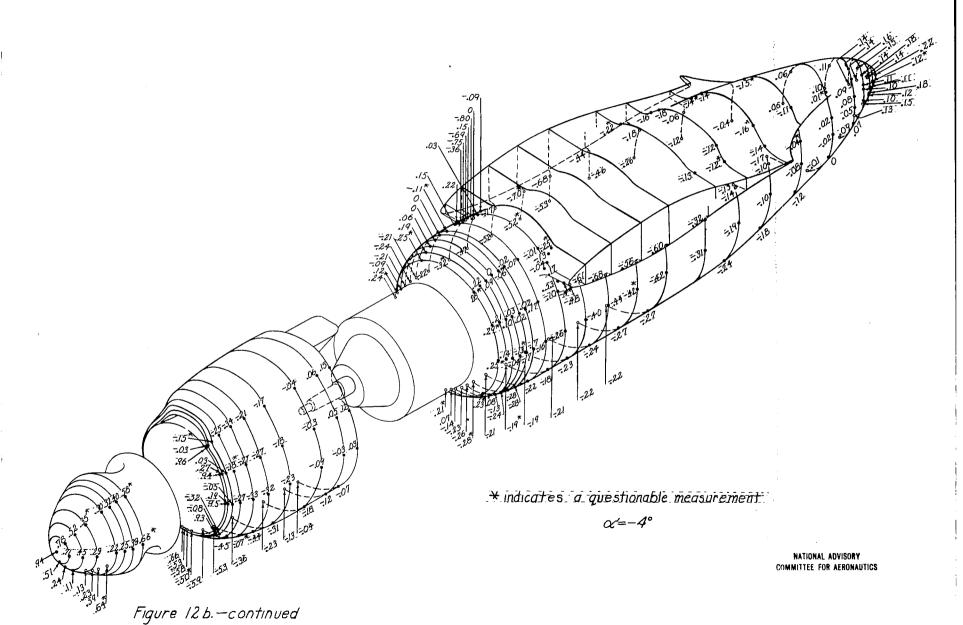
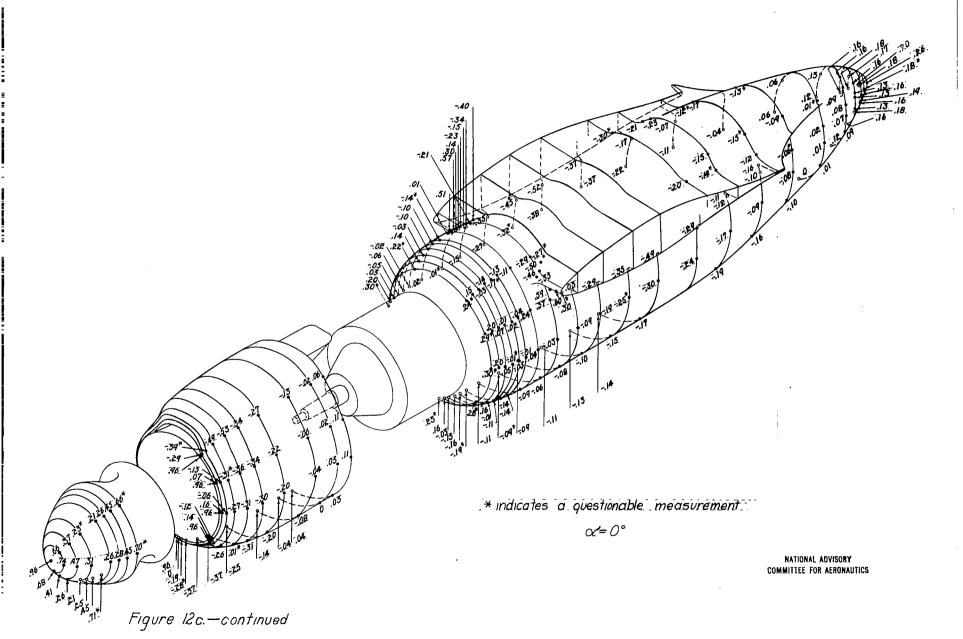
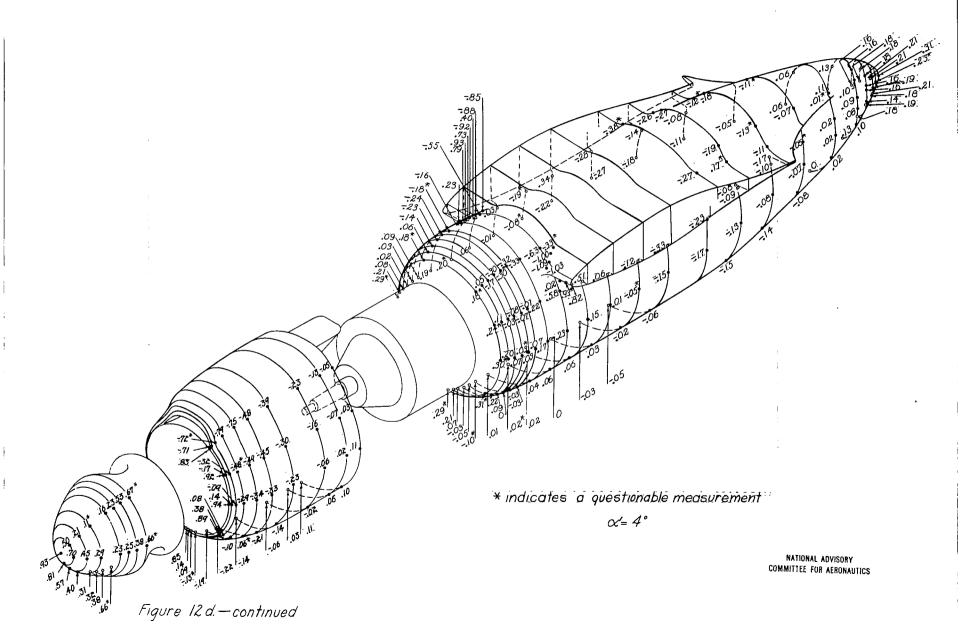
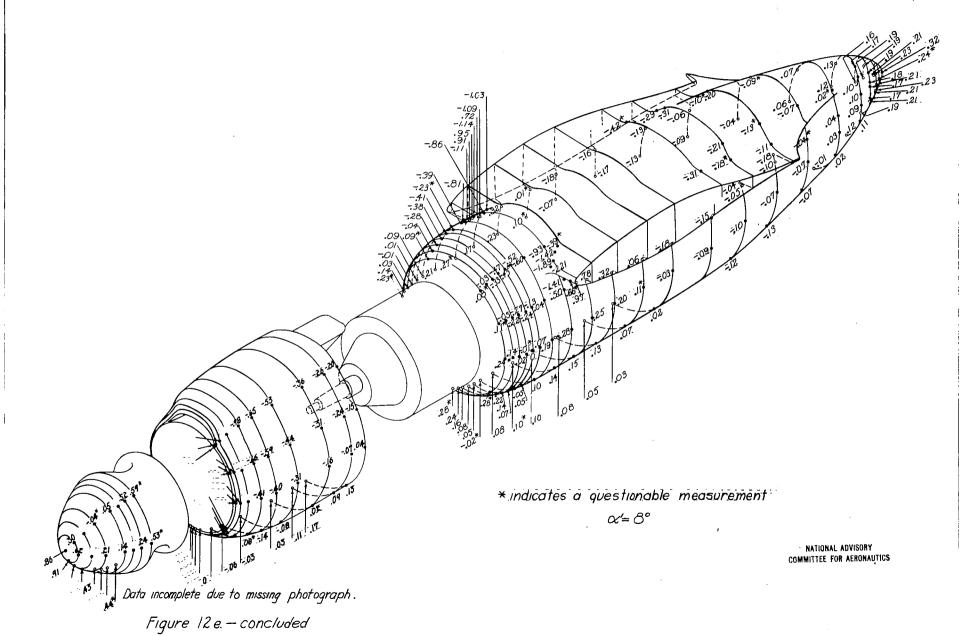


Figure 12 a.—Pressure coefficients p/q on spinner, cowl, and nacelle of 0.2375-scale model Douglas XA-26 airplane; $\psi=5^\circ$; $q\approx50$ lb/sqft; $R\approx3,870,000$; $M\approx0.12^\circ$.









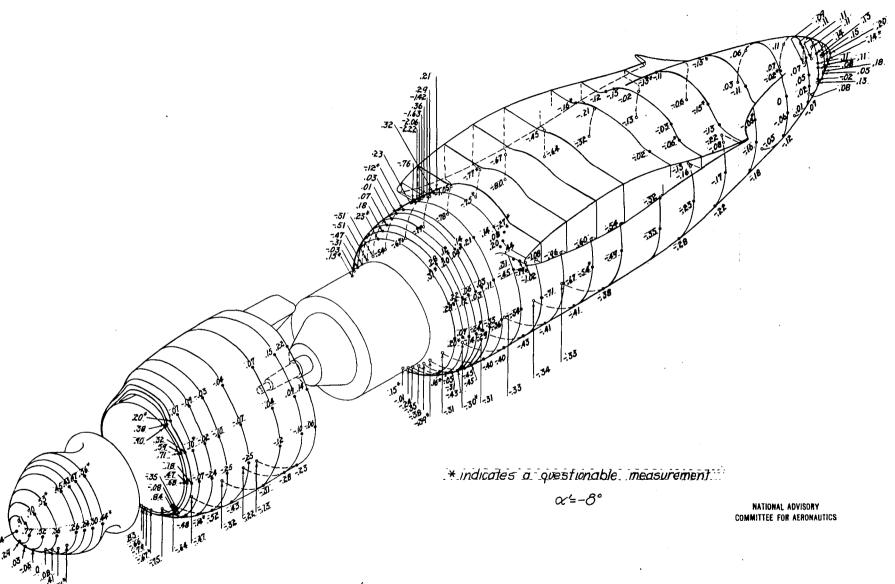


Figure 13 a. — Pressure coefficients p/q on spinner, cowl, and nacelle of 0.2375—scale model Douglas XA-26 airplane; ψ =10°; $q\approx$ 501b/sqft; R \approx 3,870,000; M \approx 0.12.

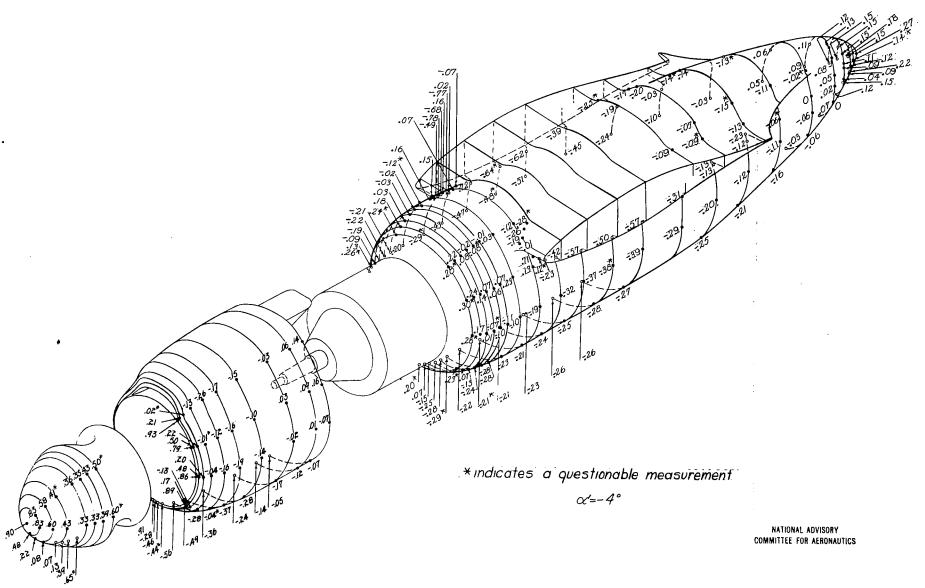


Figure 13b.—continued

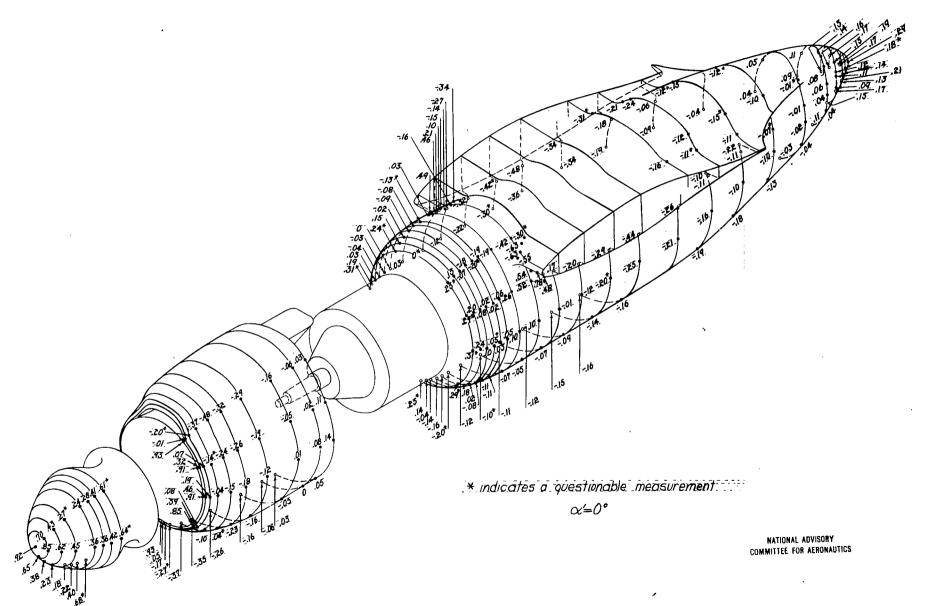


Figure 13 c. — continued

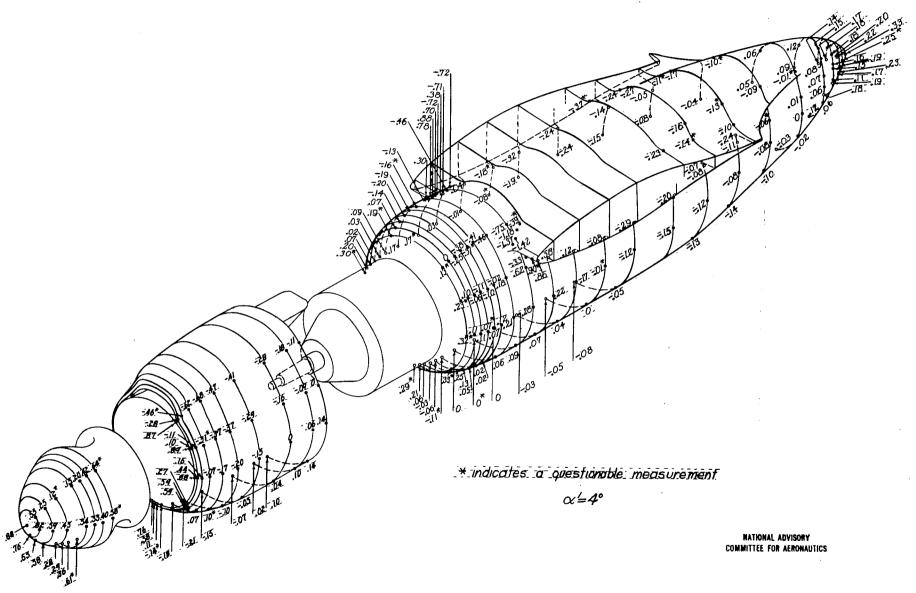


Figure 13 d.—continued

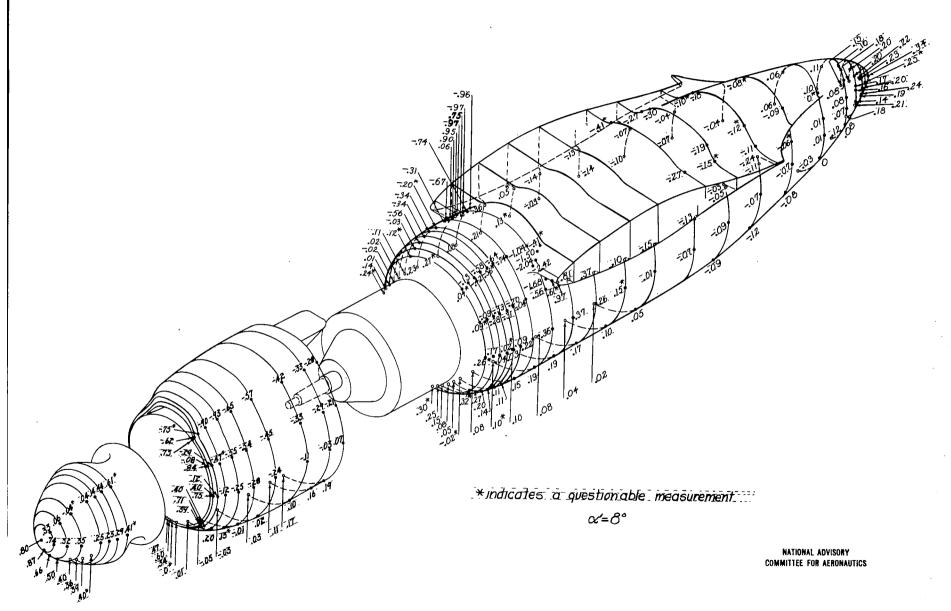


Figure 13e.—concluded

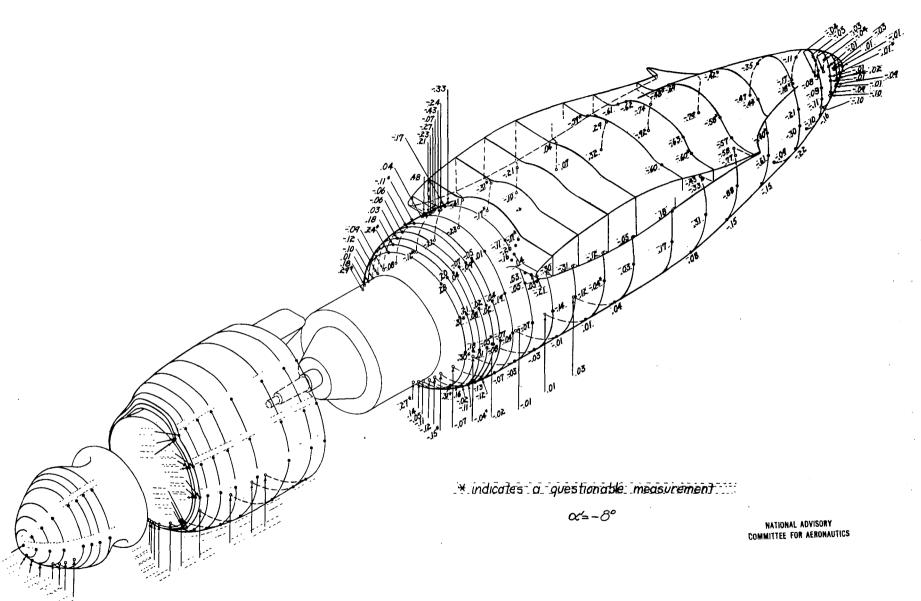
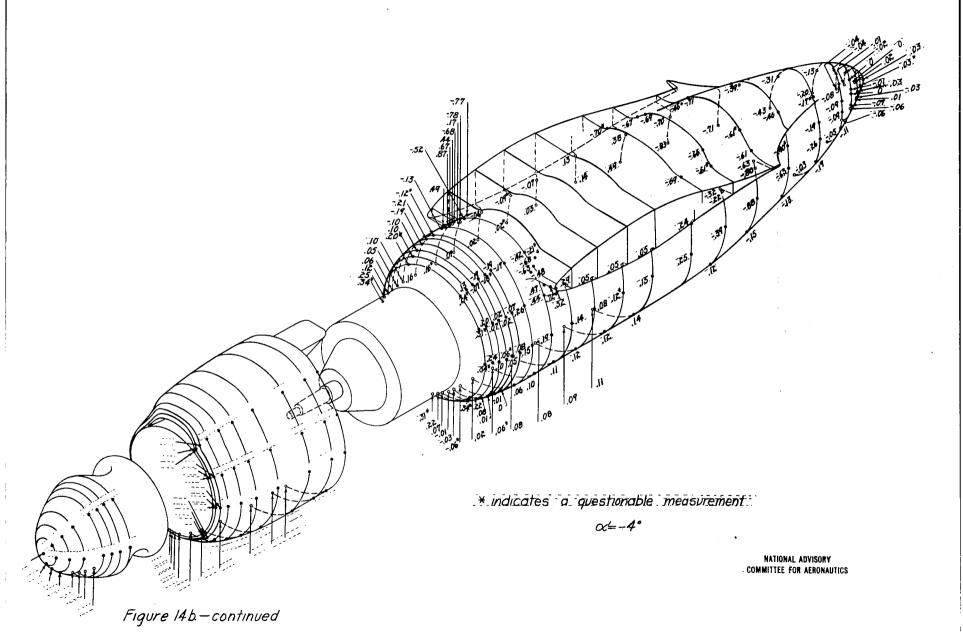


Figure 14a.—Pressure coefficients p/q on nacelle of 0.2375-scale model Douglas XA-26 airplane; $\psi=0^\circ; \delta_f=55^\circ; q\approx 50\,lb/sqft; R\approx 3,720,000; M\approx 0.12$.



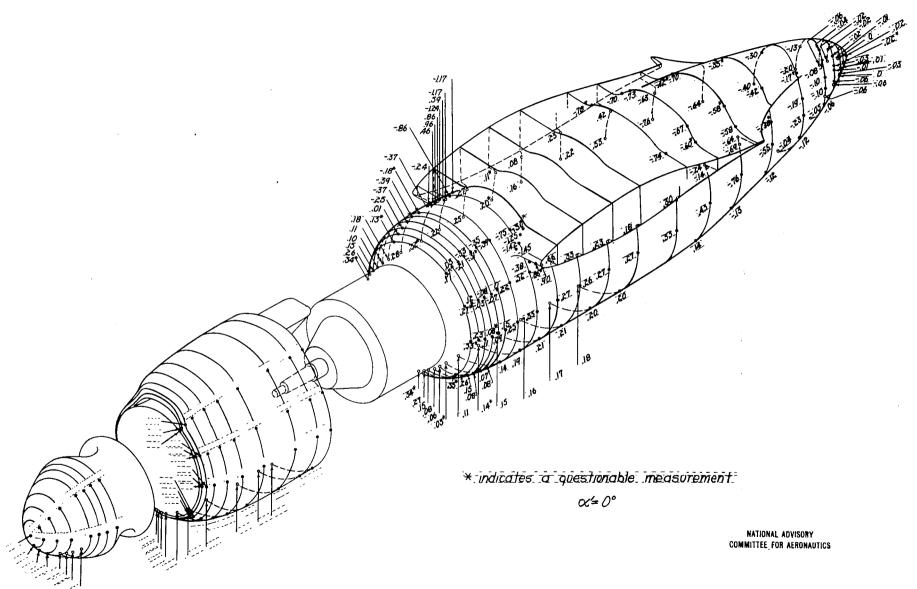
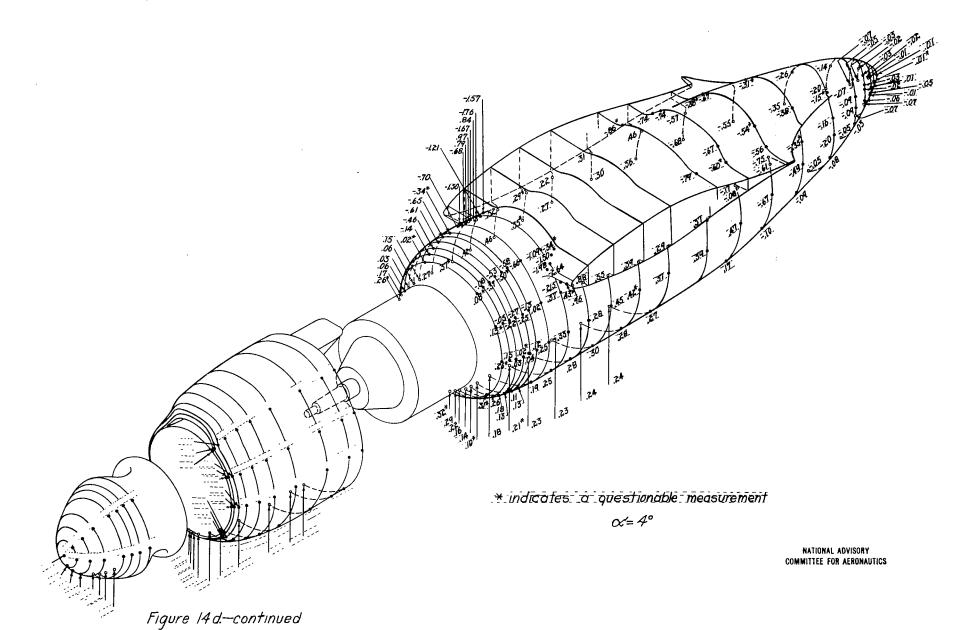


Figure 14c.—continued



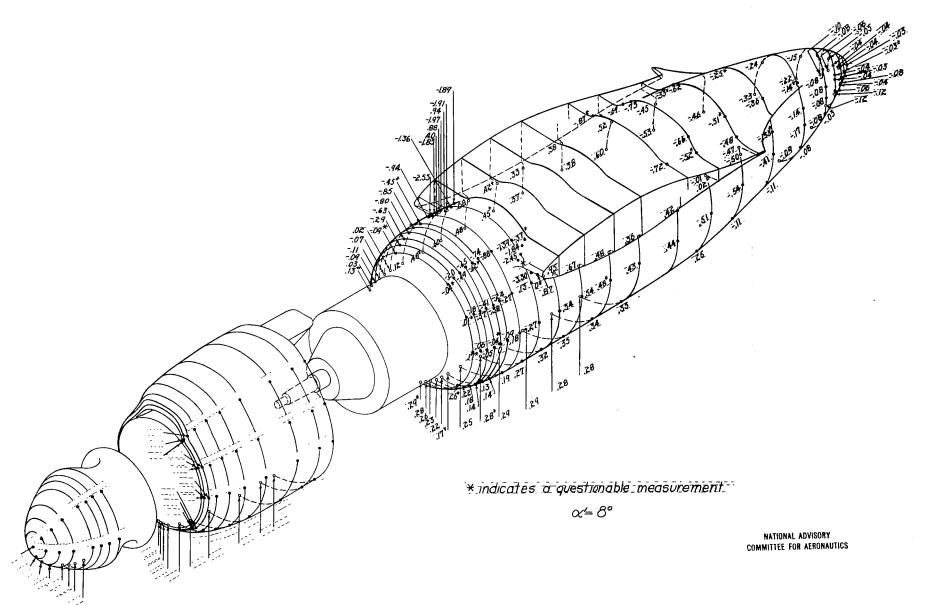
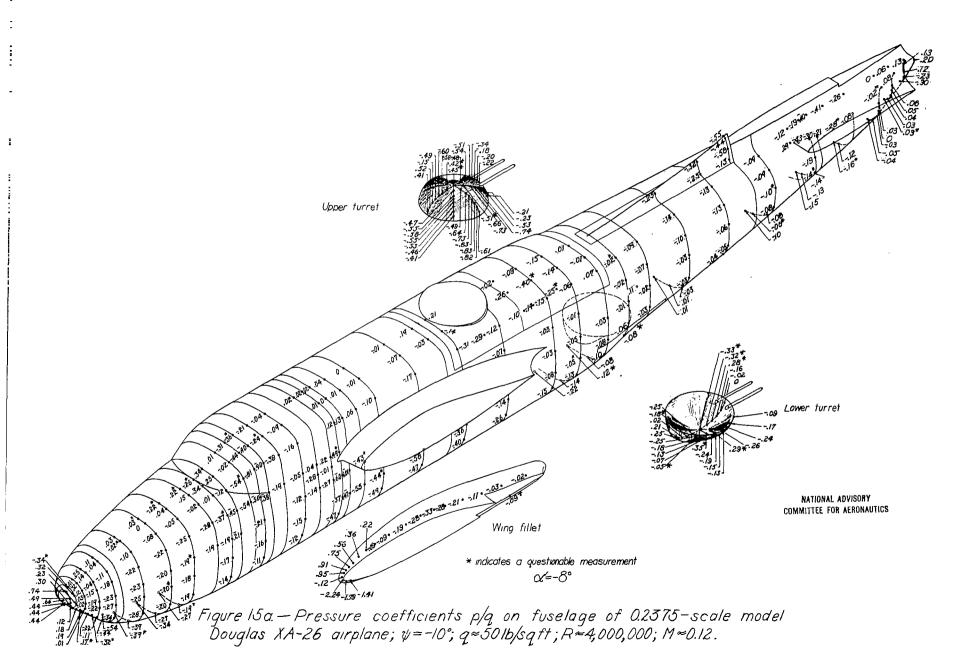
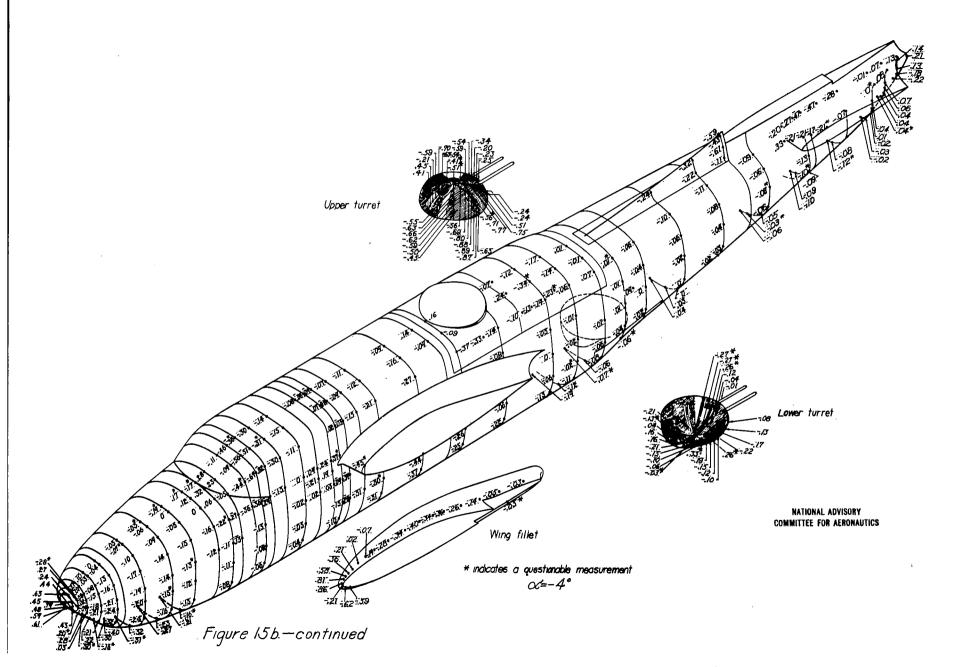
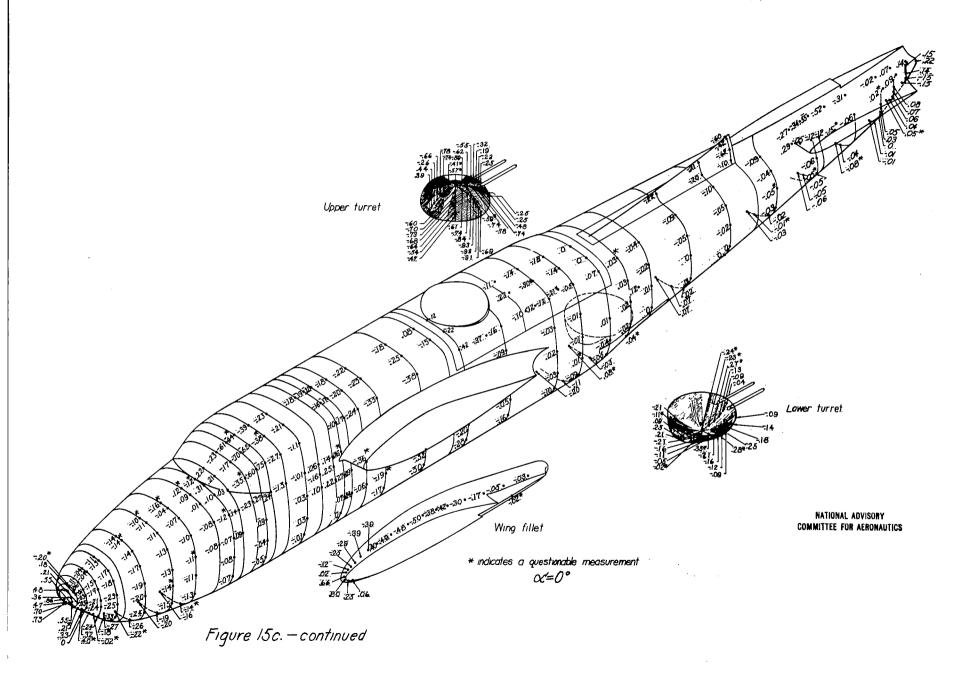
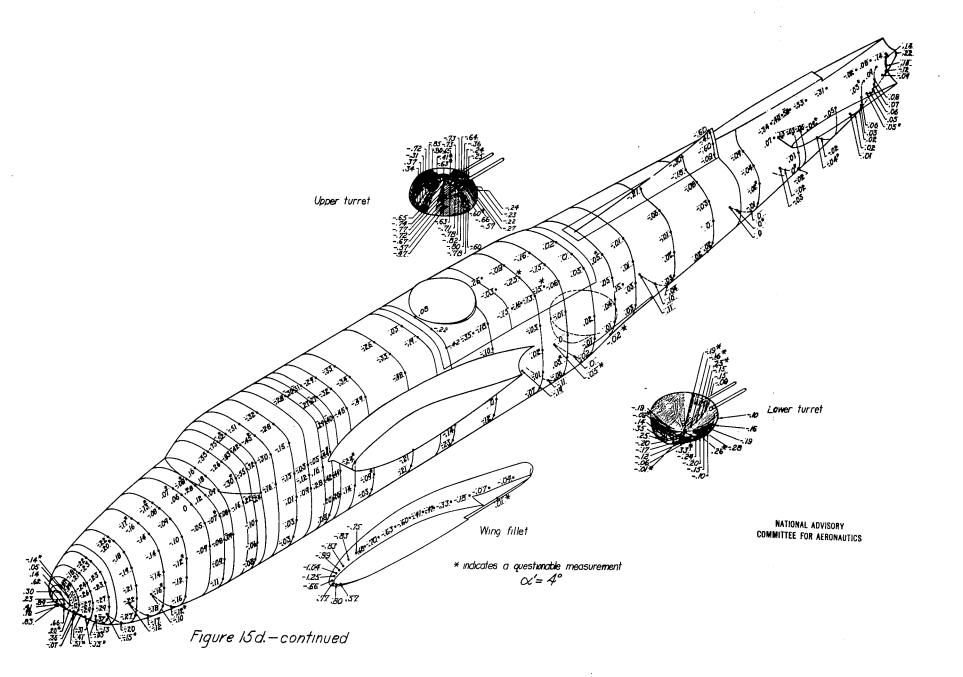


Figure 14e.— concluded









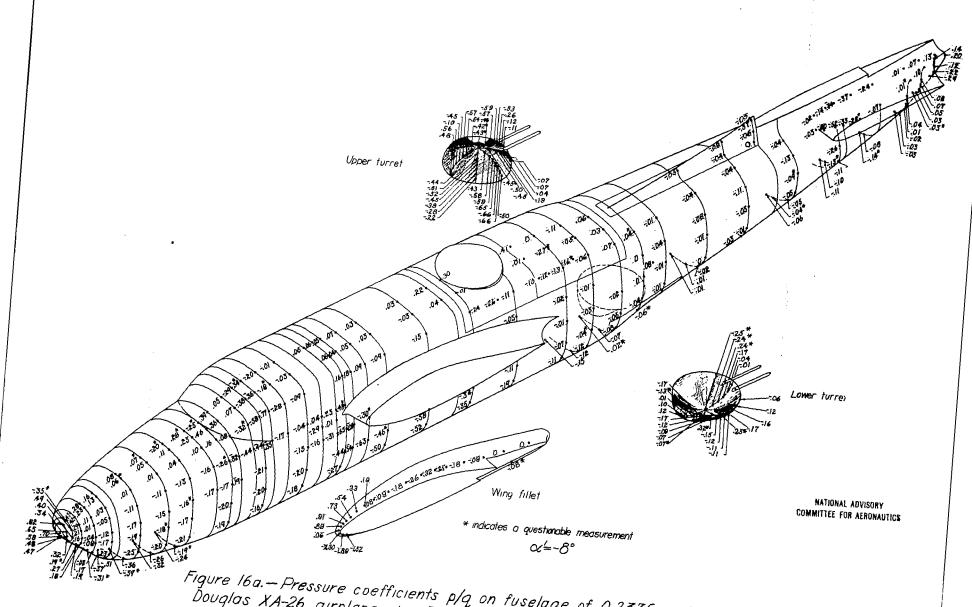
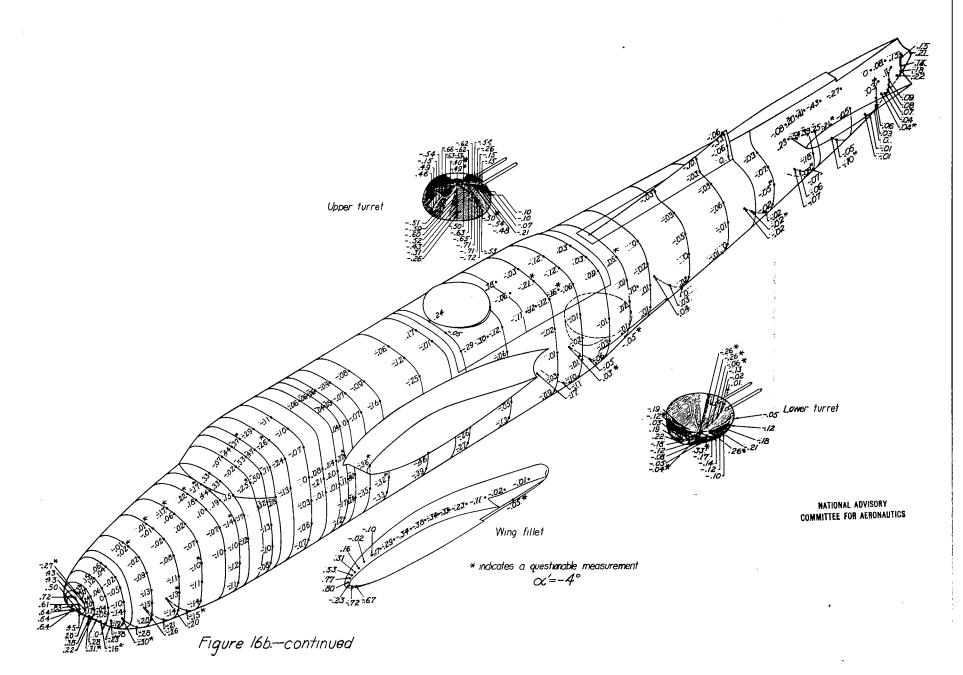
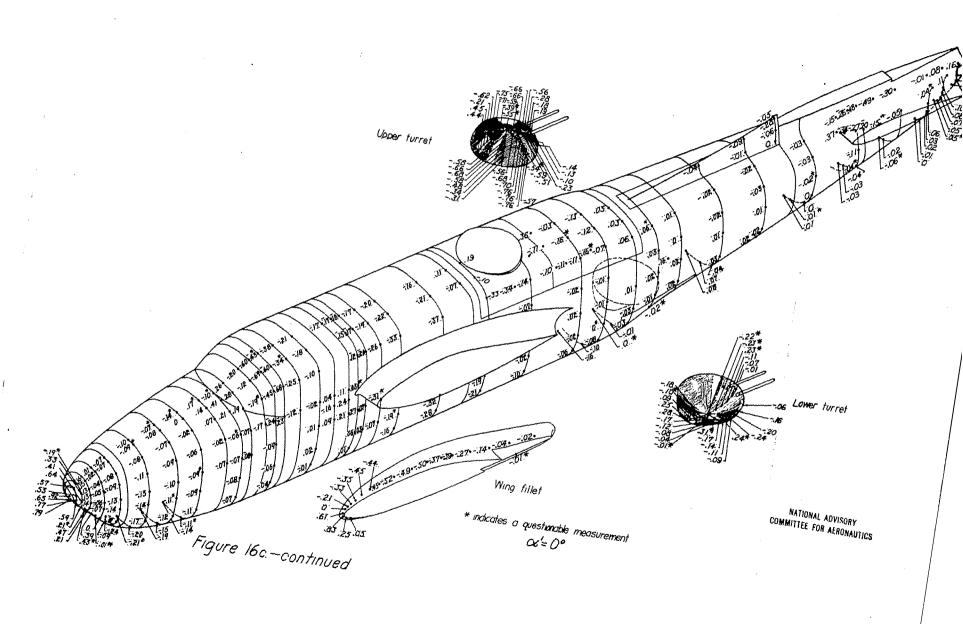
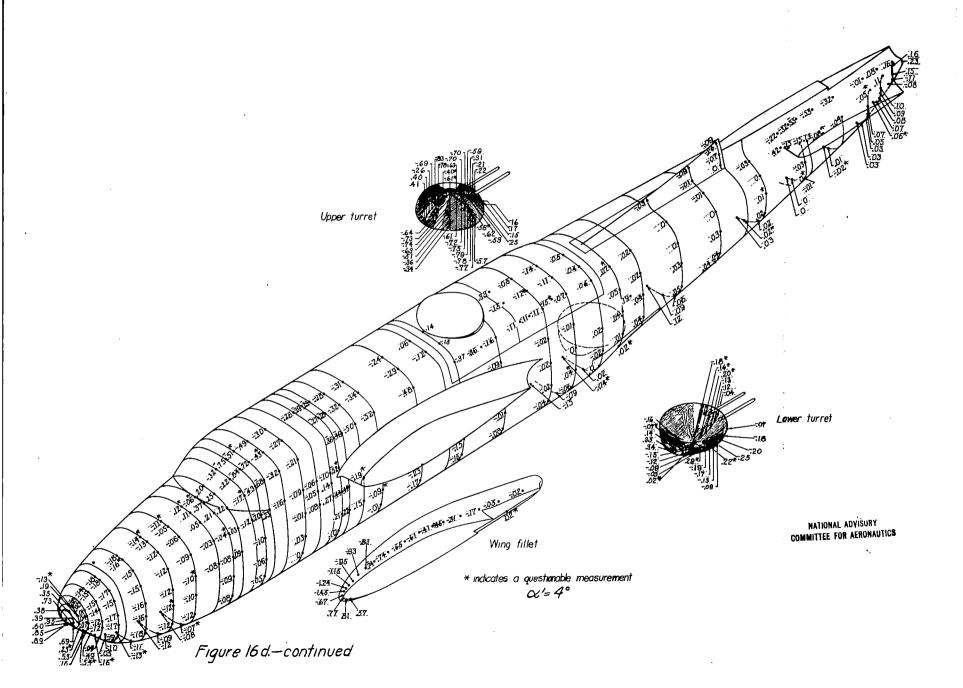
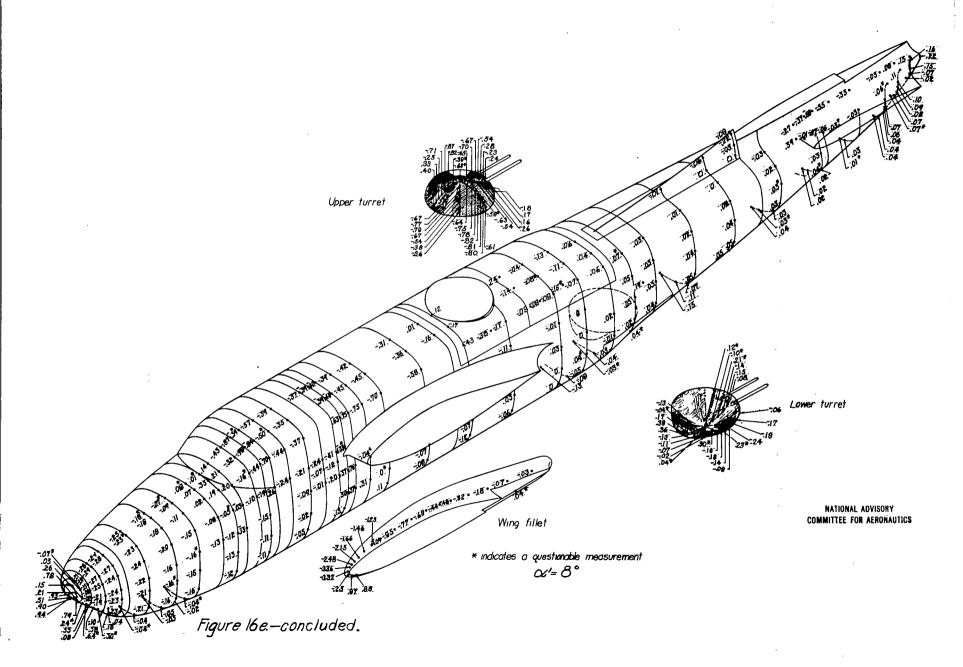


Figure 16a.—Pressure coefficients p/q on fuselage of 0.2375-scale model Douglas XA-26 airplane; $\psi=-5^\circ$; $q\approx50$ lb/sq ft; $R\approx3$,990,000; $M\approx0.12$.









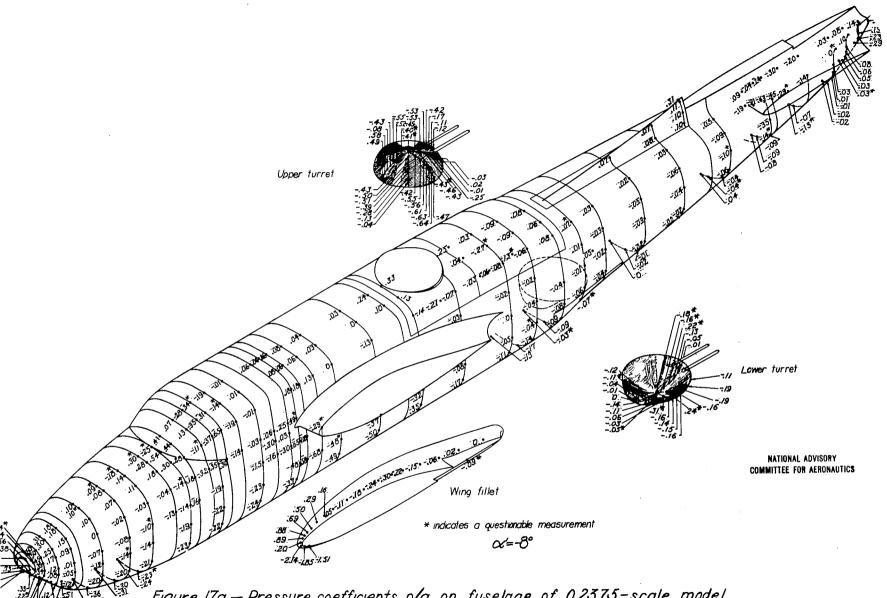
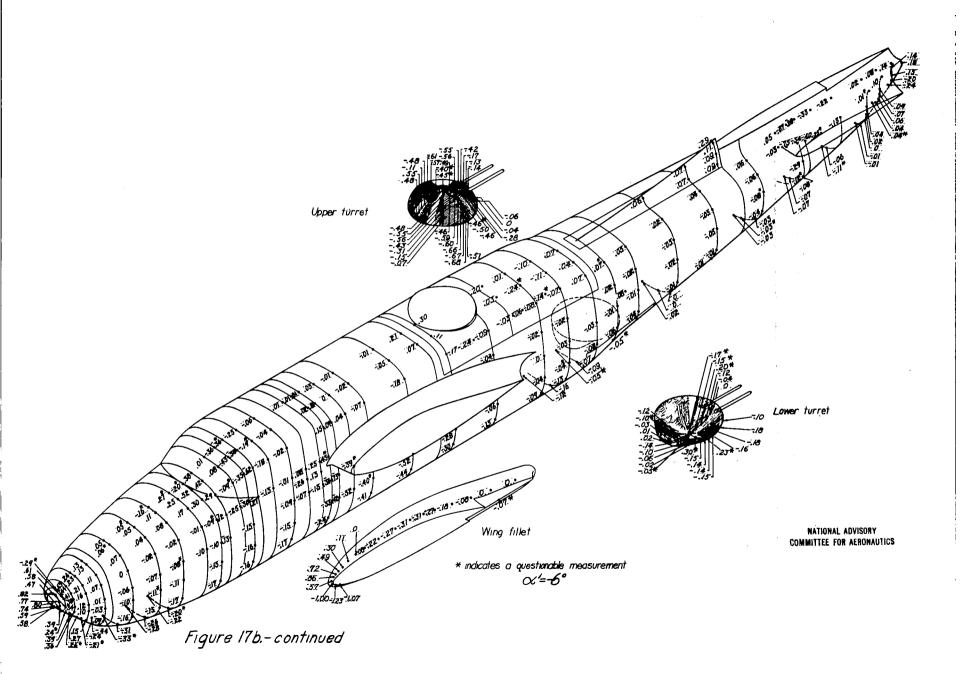
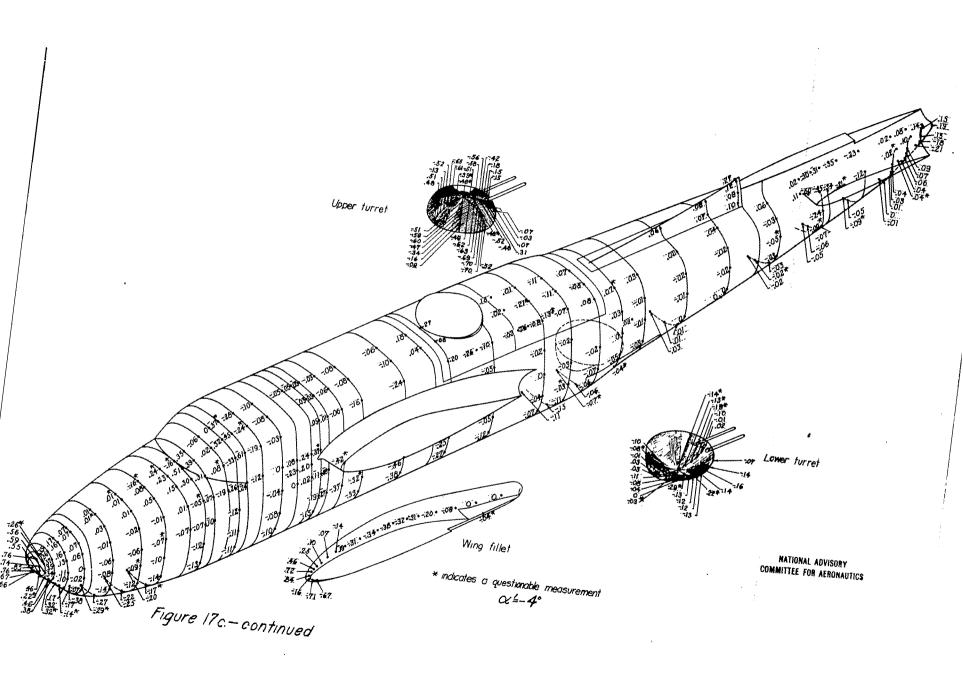
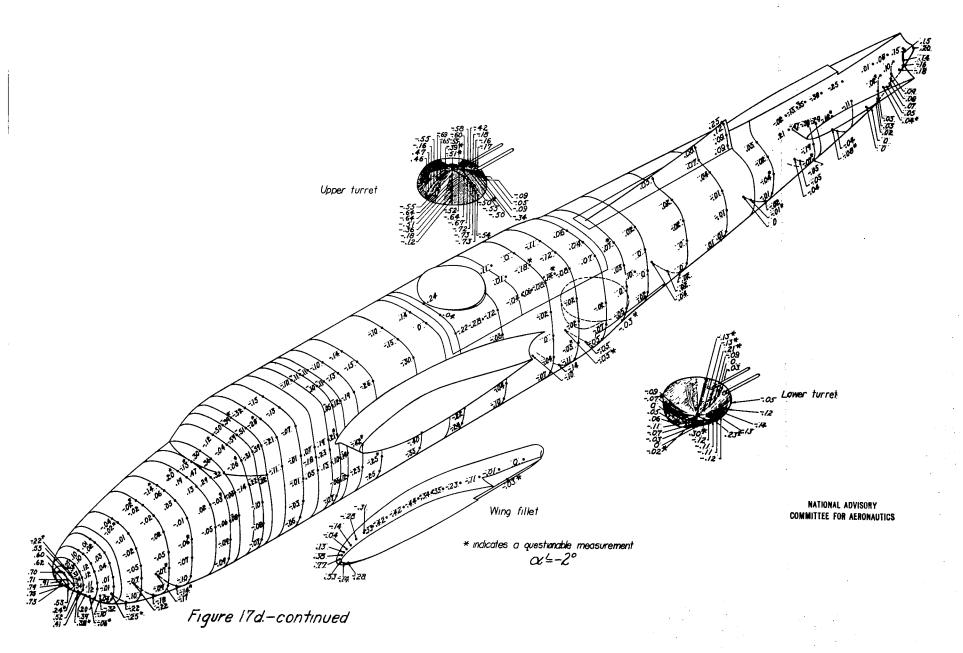
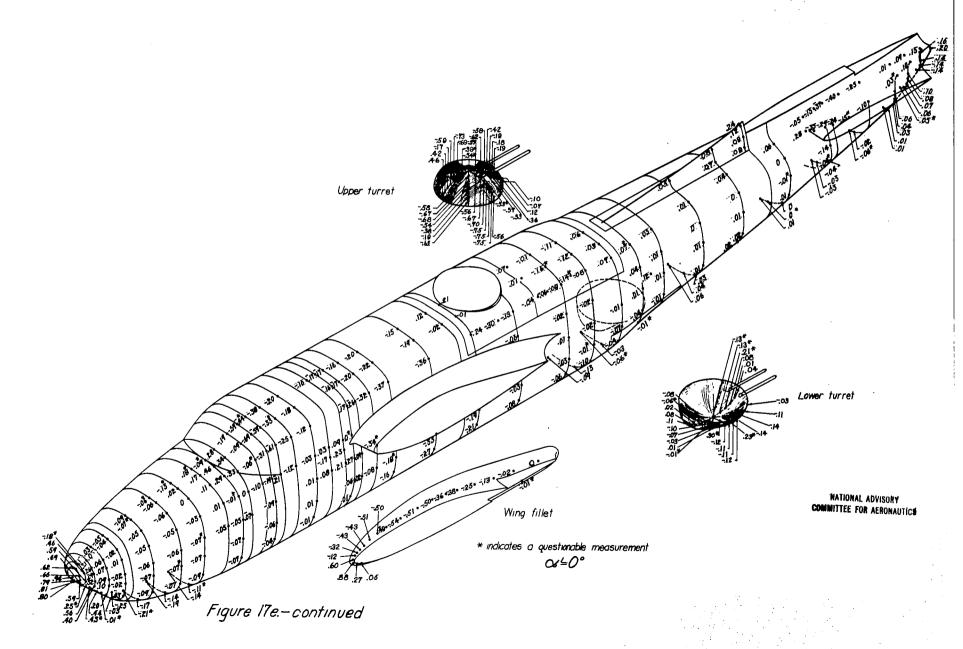



Figure 17a.— Pressure coefficients p/q on fuselage of 0.2375-scale model
Douglas XA-26 airplane; ψ=0°; q≈50lb/sqft; R≈3,980,000; M≈0.12 .












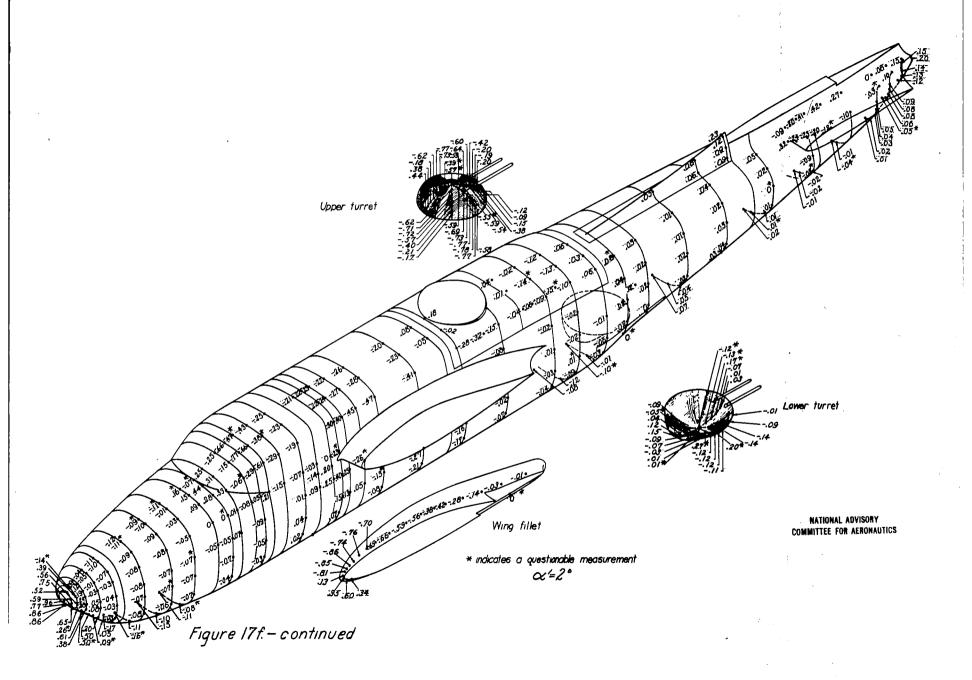

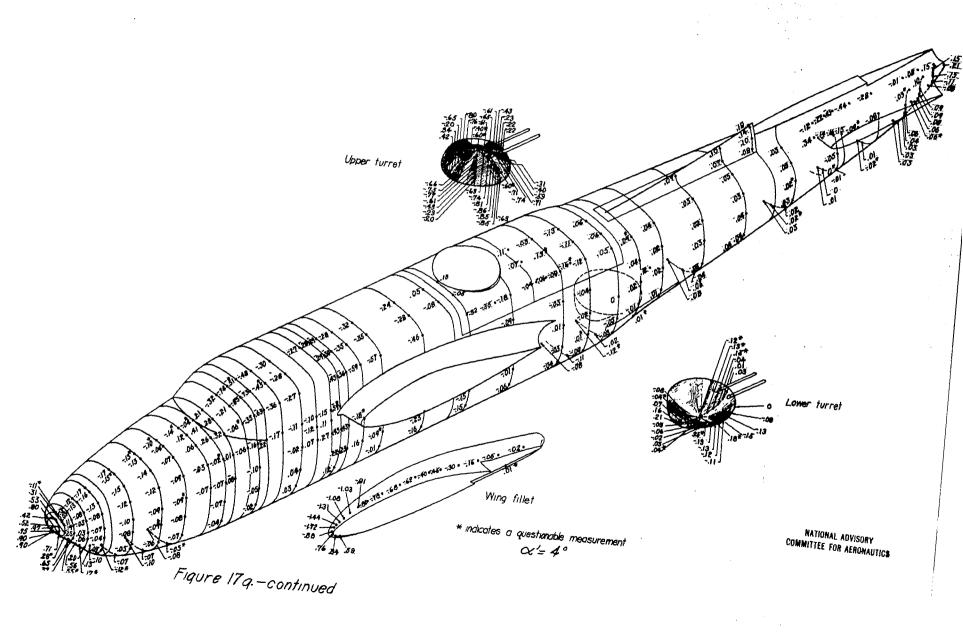

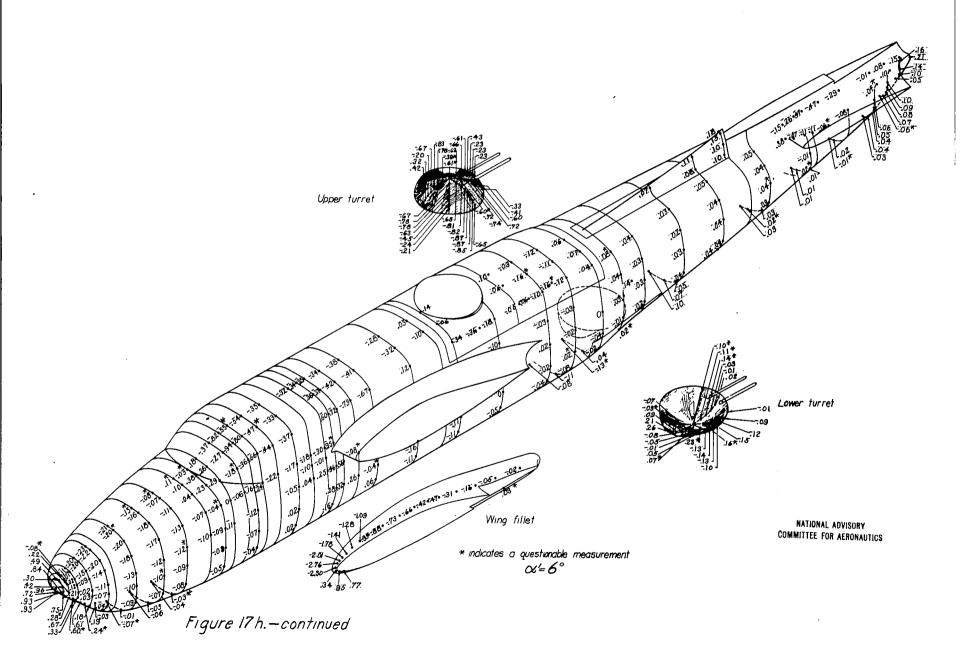

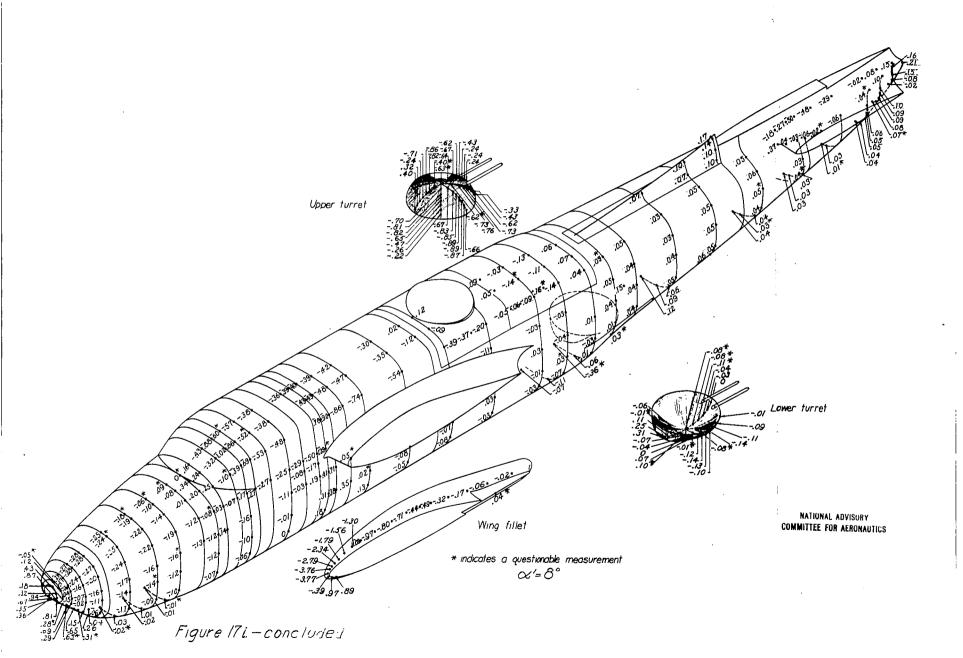

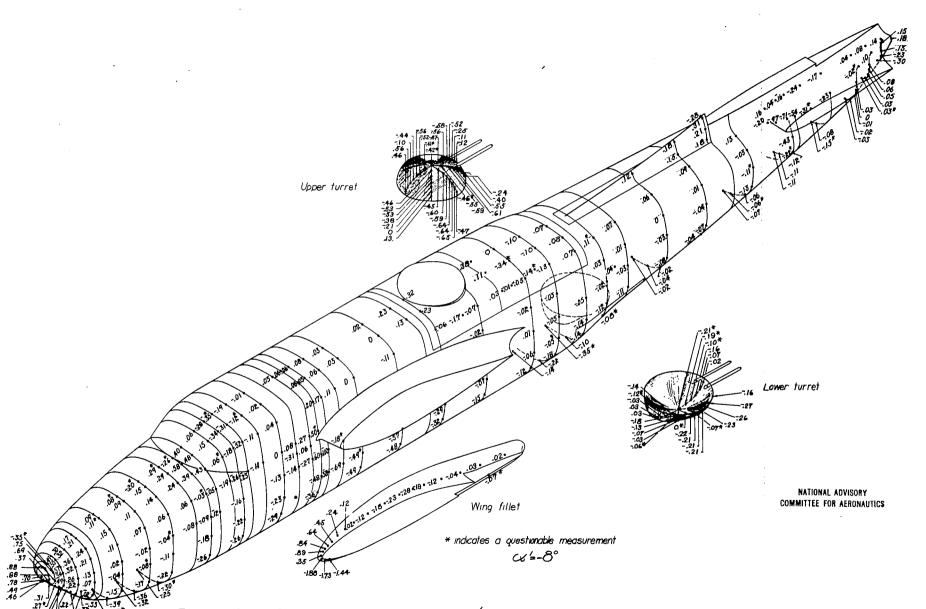
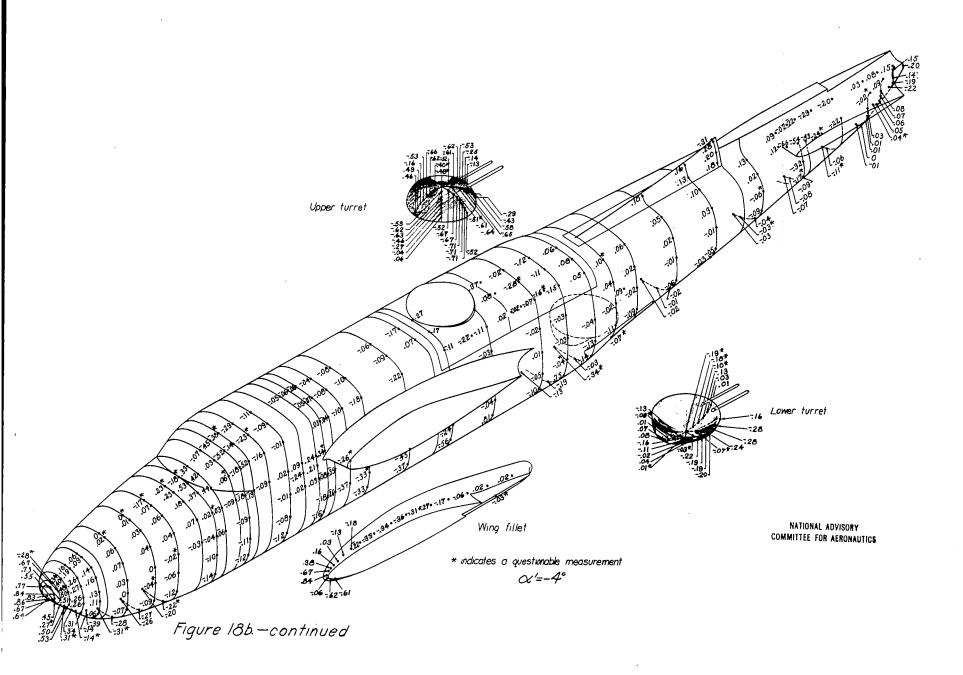
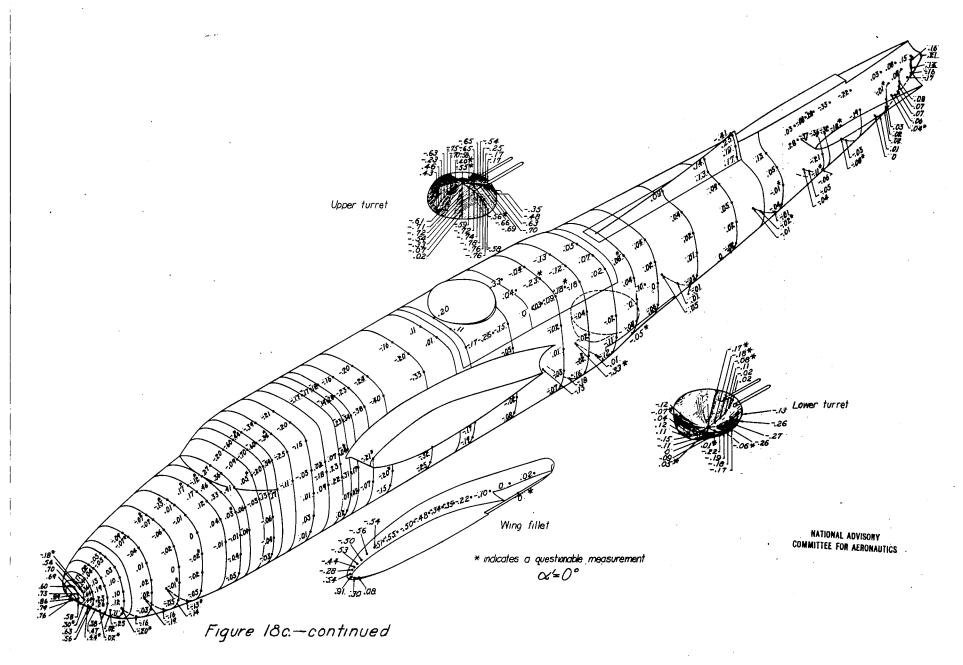
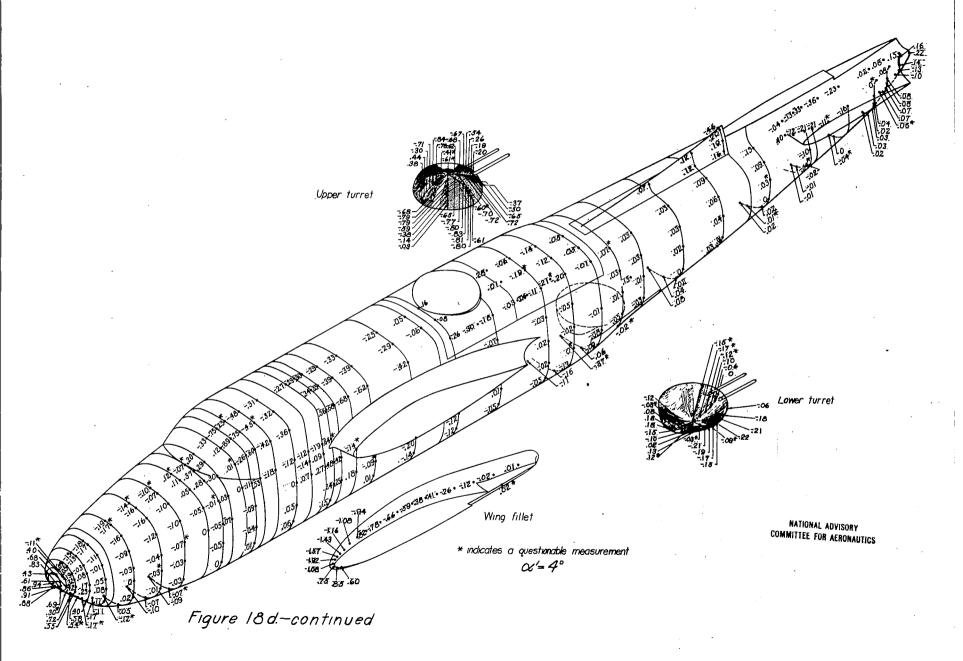
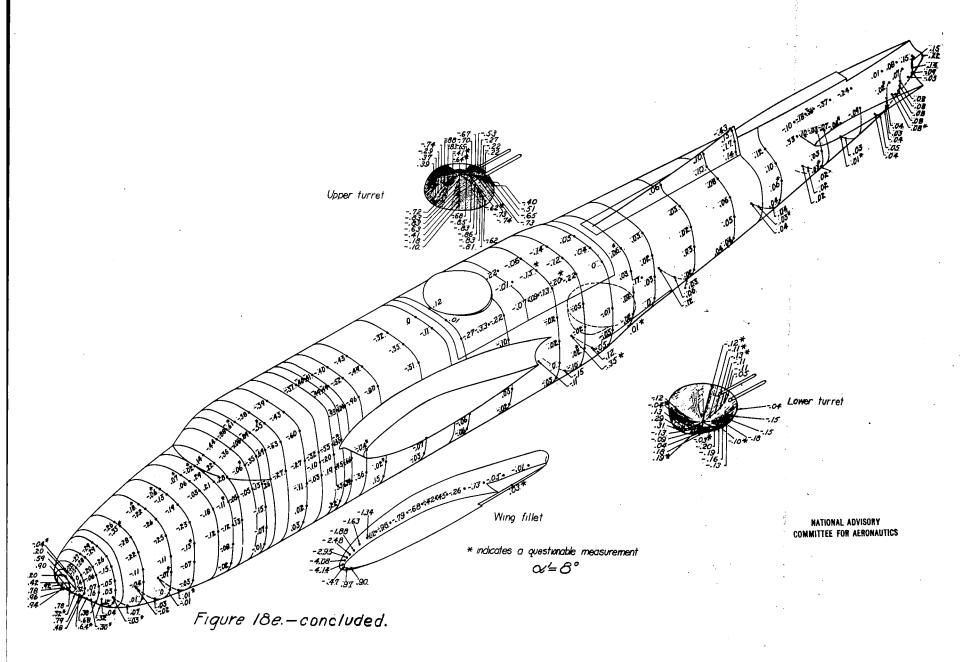


Figure 18 a. — Pressure coefficients p/q on fuselage of 0.2375-scale model Douglas XA-26 airplane; $\psi=5^\circ$; $q\approx50$ lb/sqft; $R\approx3$,970,000; $M\approx0.12$.









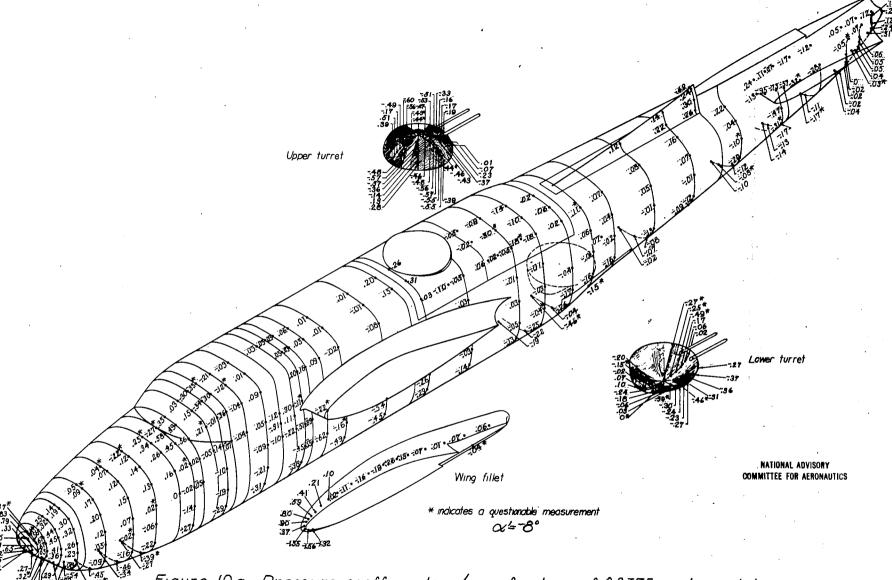
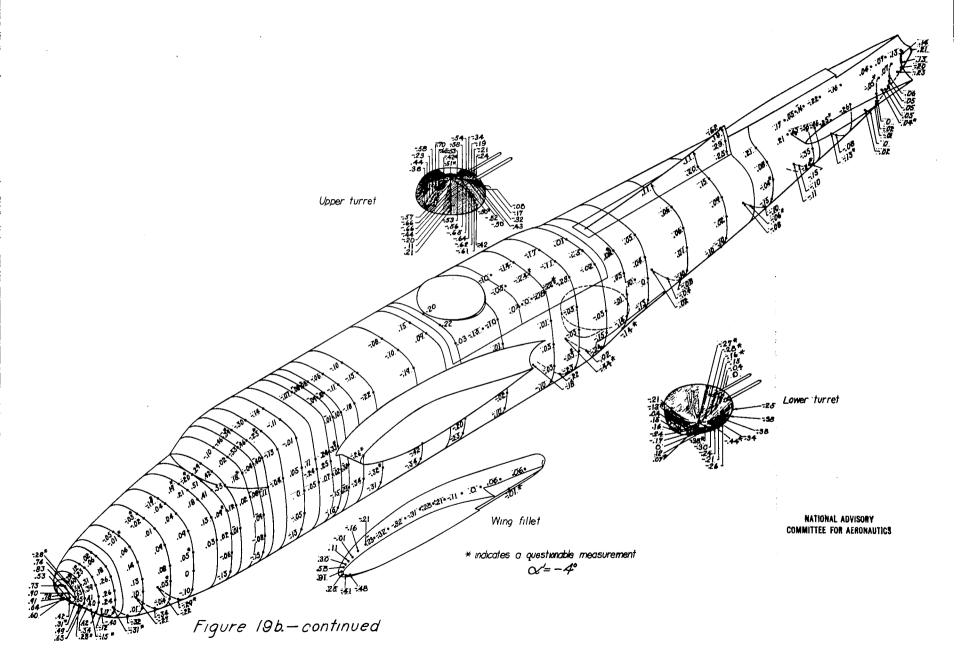
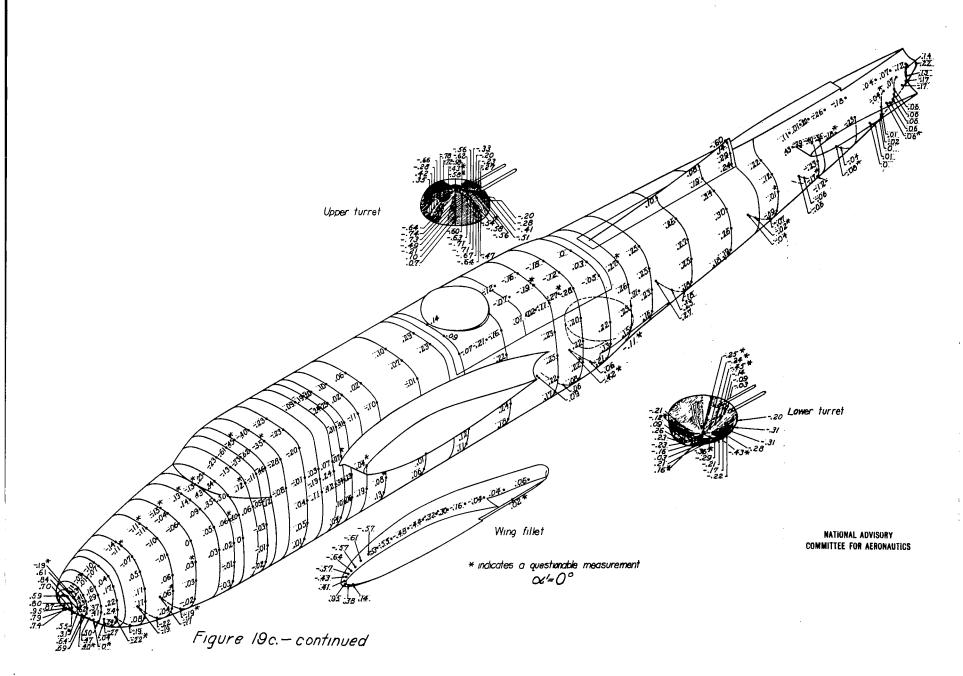
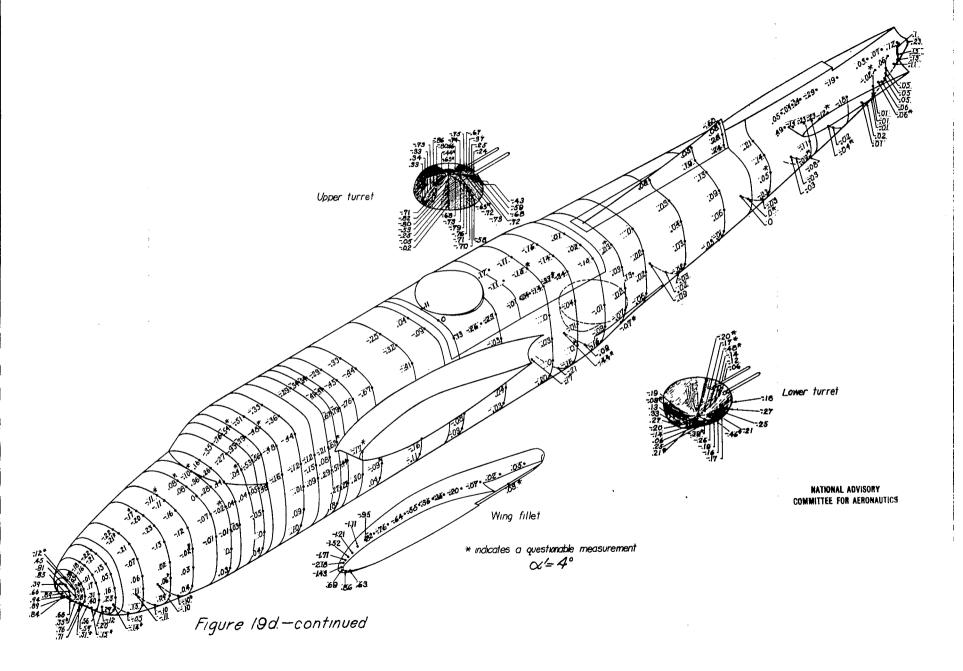
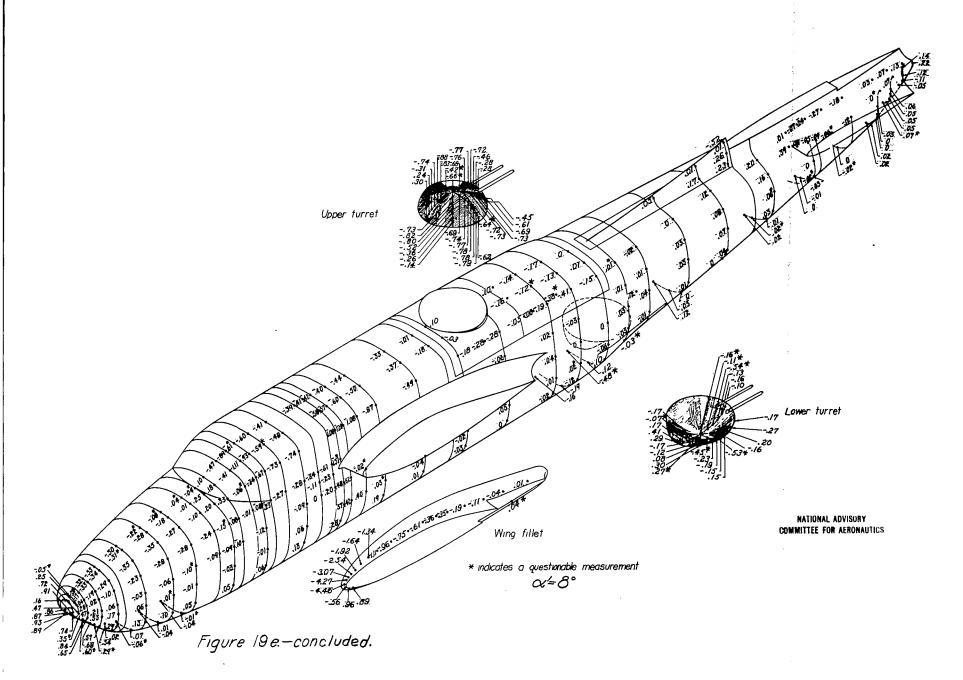



Figure 19 a - Pressure coefficients p/q on fuselage of 0.2375-scale model Douglas XA-26 airplane; \psi=10°; q \sigmu 50 lb/sqft; R \sigmu 3,950,000; M \sigmu 0.12.












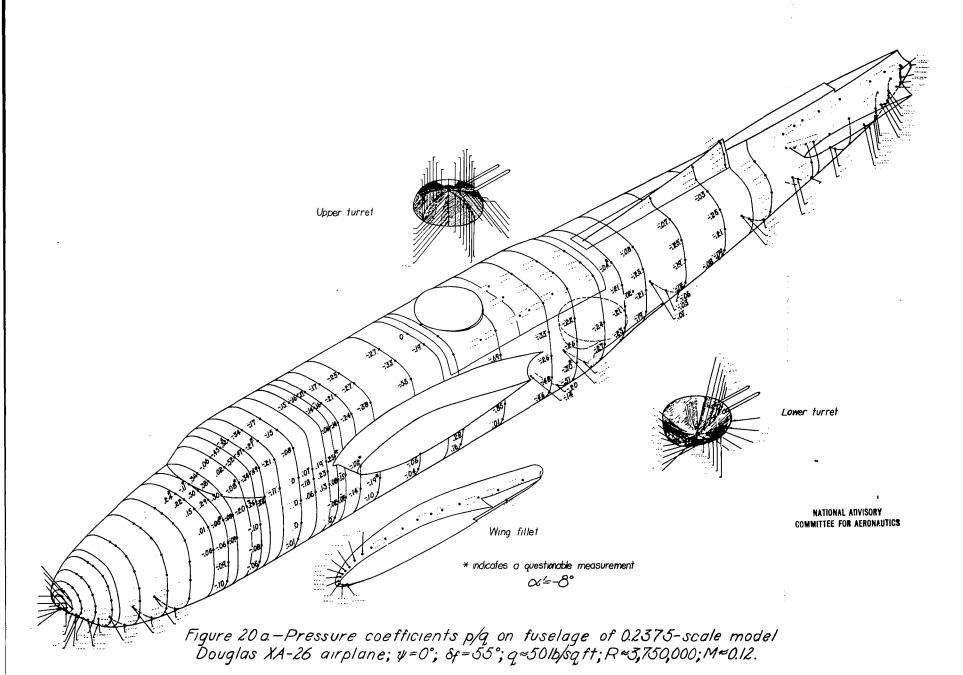

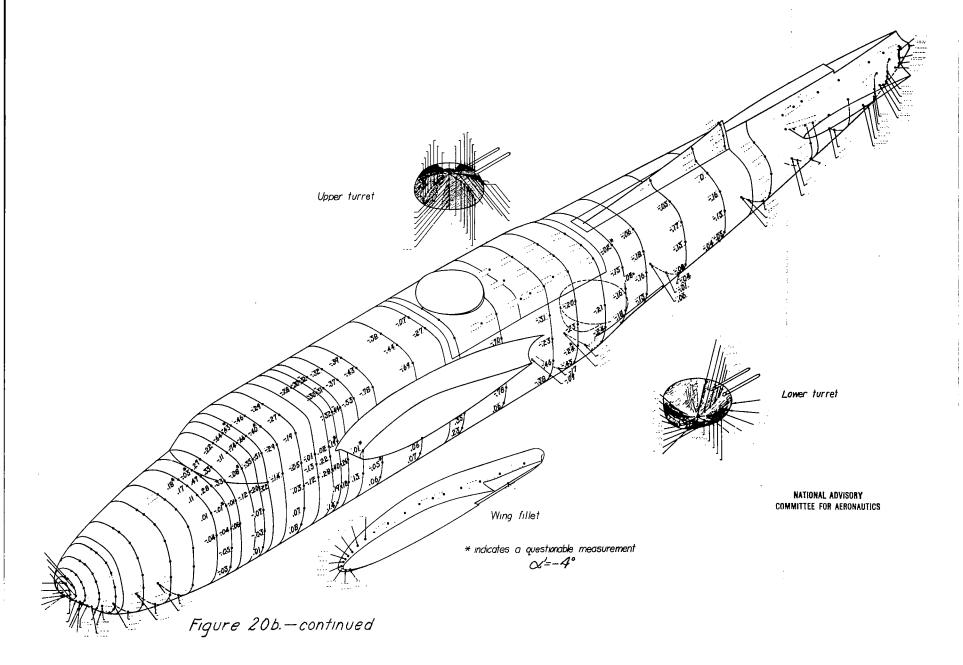

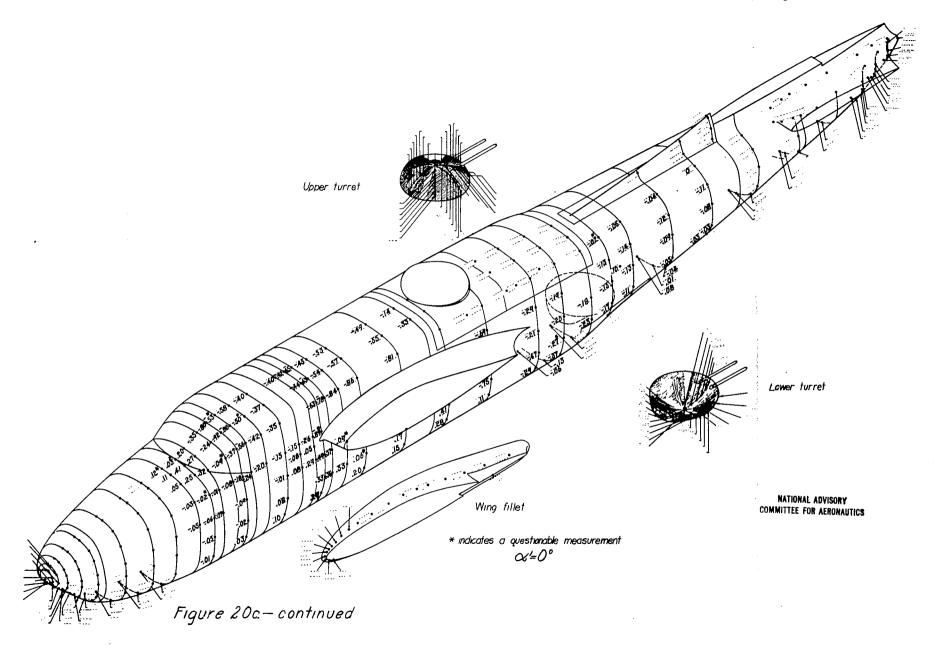

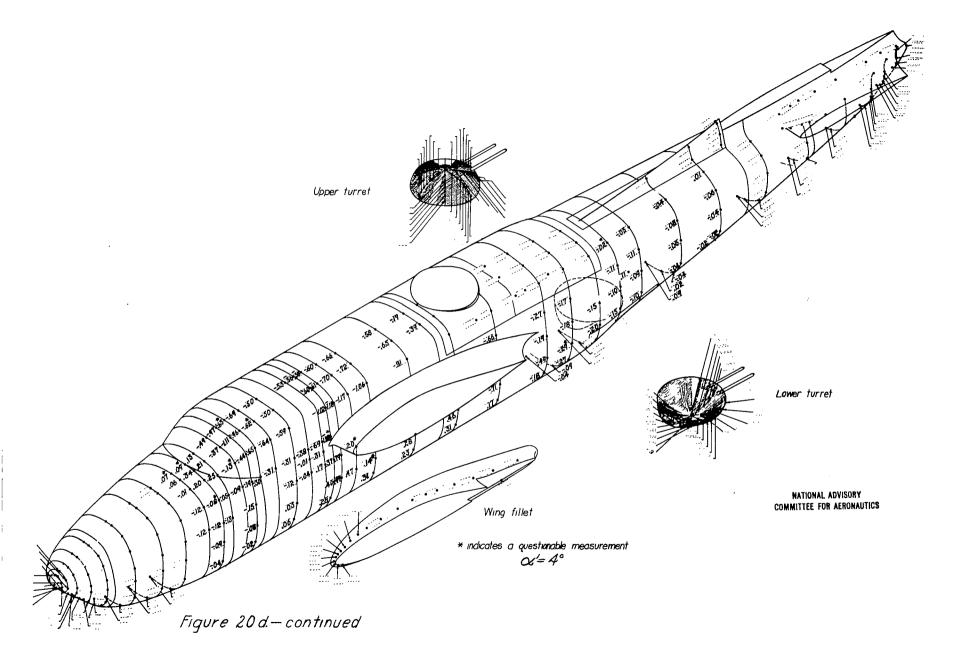


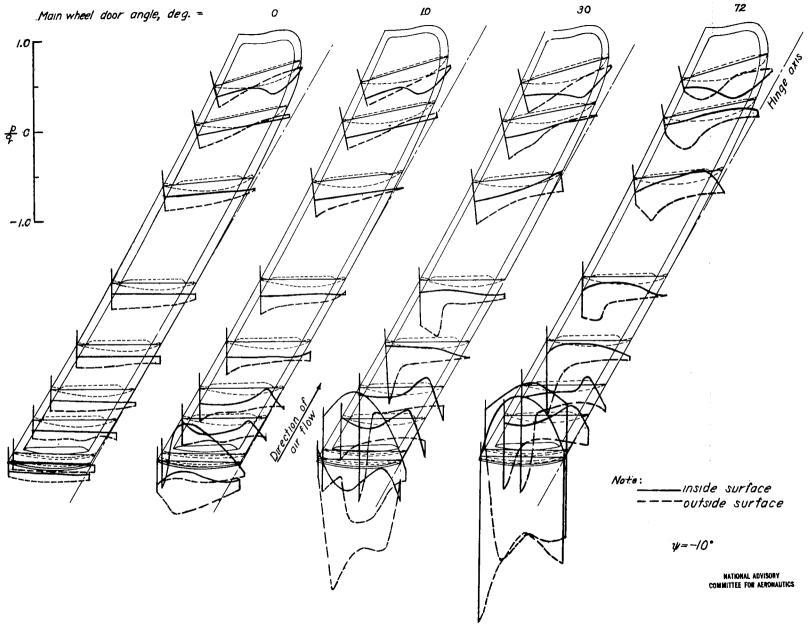


Figure 21a.—Pressure distribution over main wheel door of 0.2375-scale model Douglas XA-26 airplane; $\alpha = 4$; $q \approx 50$ lb/sq ft; $R \approx 3,950,000$; $M \approx 0.12$.

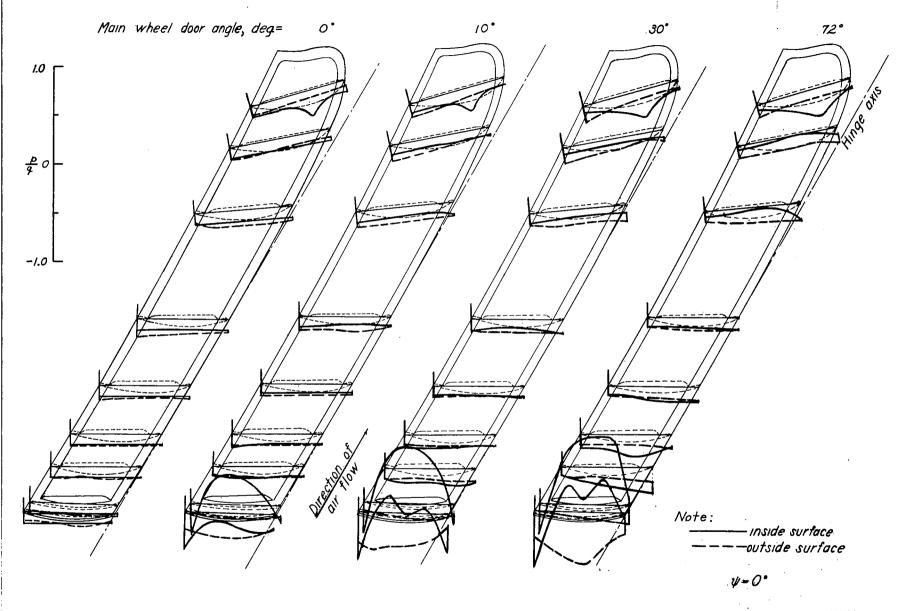

NATIONAL ADVISORY .
COMMITTEE FOR AERONAUTICS

Figure 21b.—continued

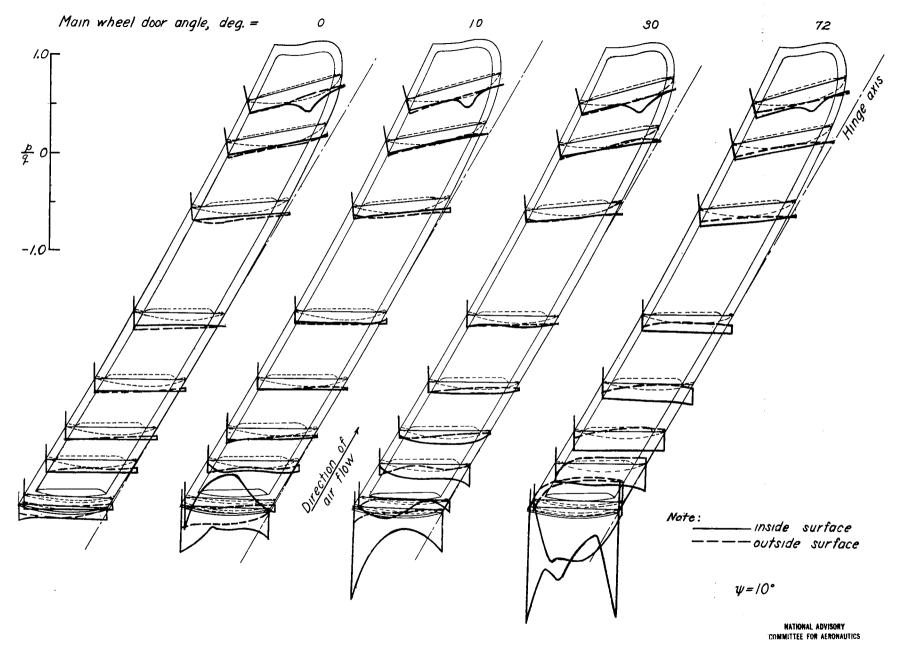


Figure 21c. concluded.

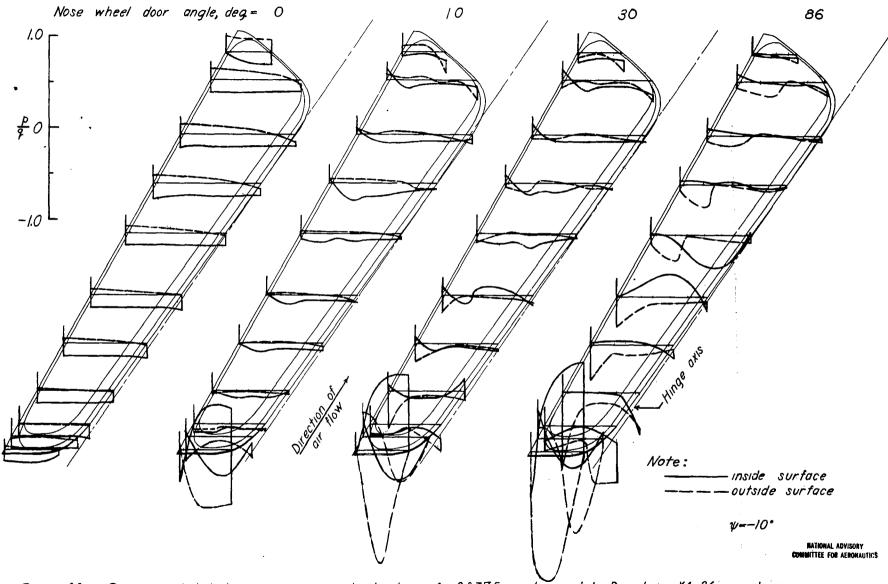


Figure 22 a.—Pressure distribution over nose wheel door of 0.2375-scale model Douglas XA-26 airplane; \alpha=4°; q=50 lb/sq ft; R =3,940,000; M = 0.12.

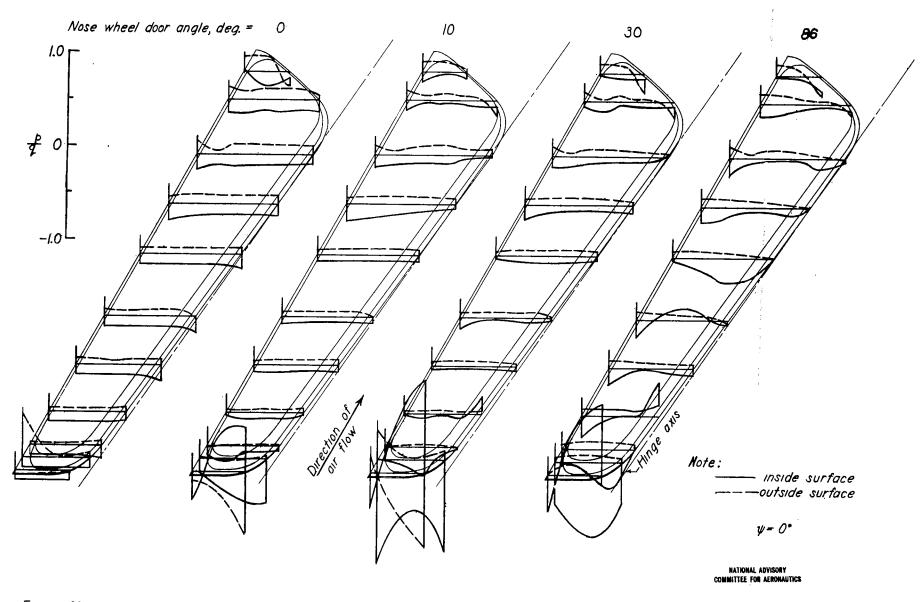


Figure 22b. - continued

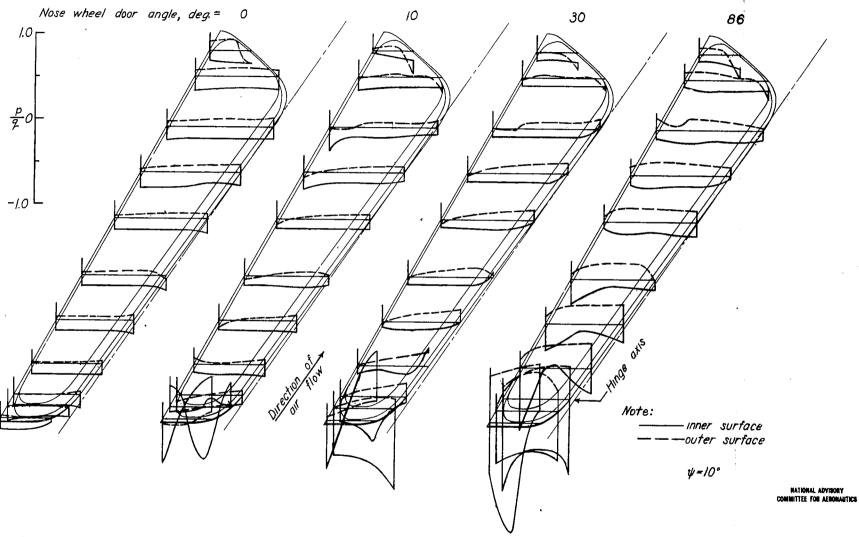


Figure 22c.—concluded.

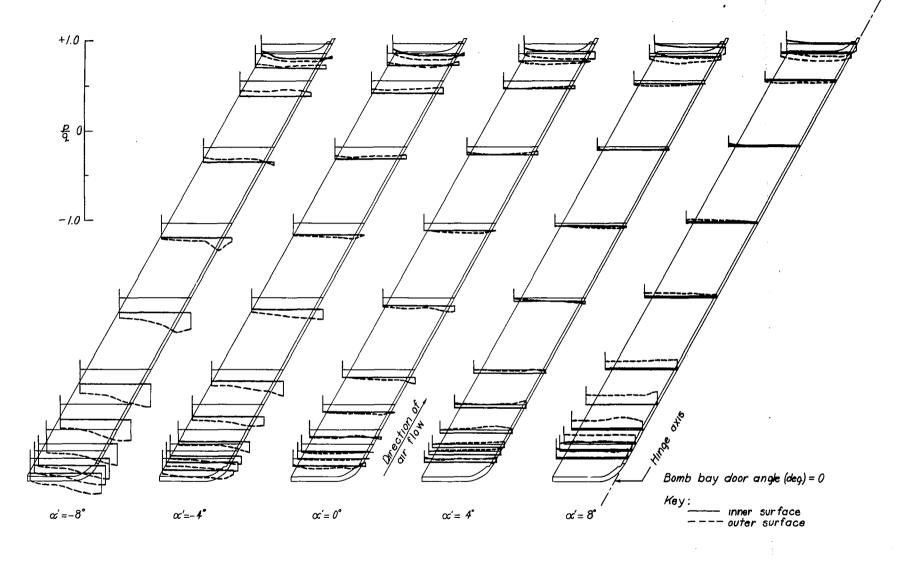
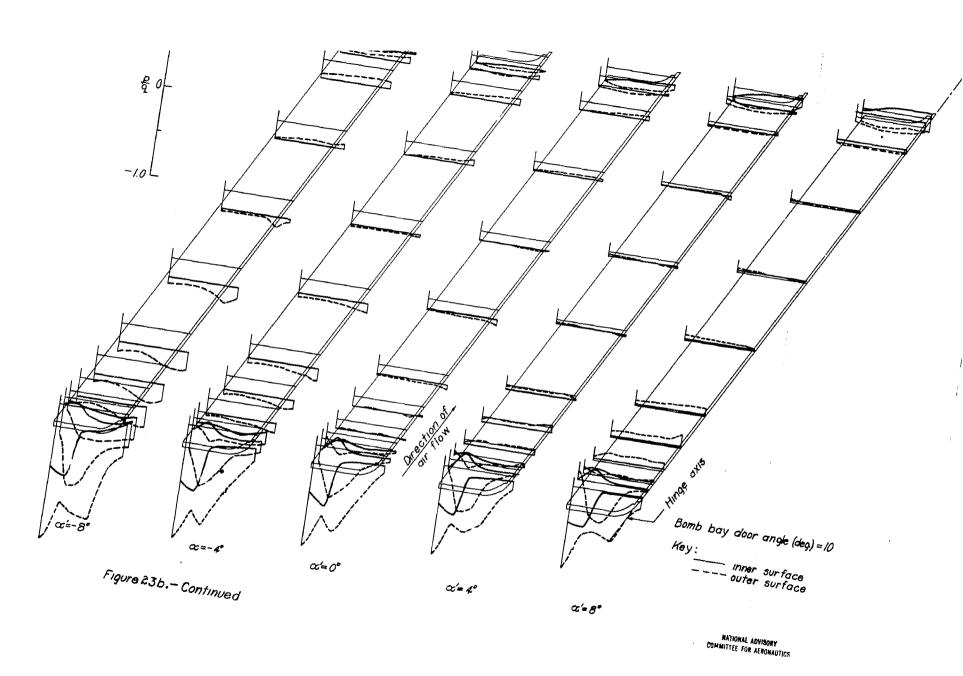


Figure 23a .— Pressure distribution over bomb bay door of 0.2375-scale model Douglas XA-26 Airplane; $\psi=0^\circ; q\approx 50$ lb/sq ft; $R\approx 3,640000; M\approx 0.18$.

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS







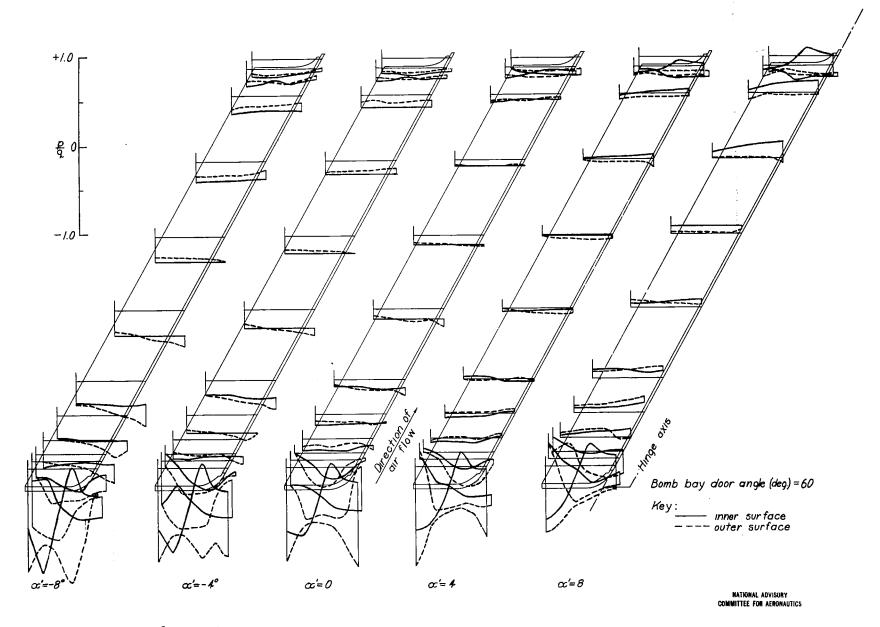



Figure 23c .- Concluded.

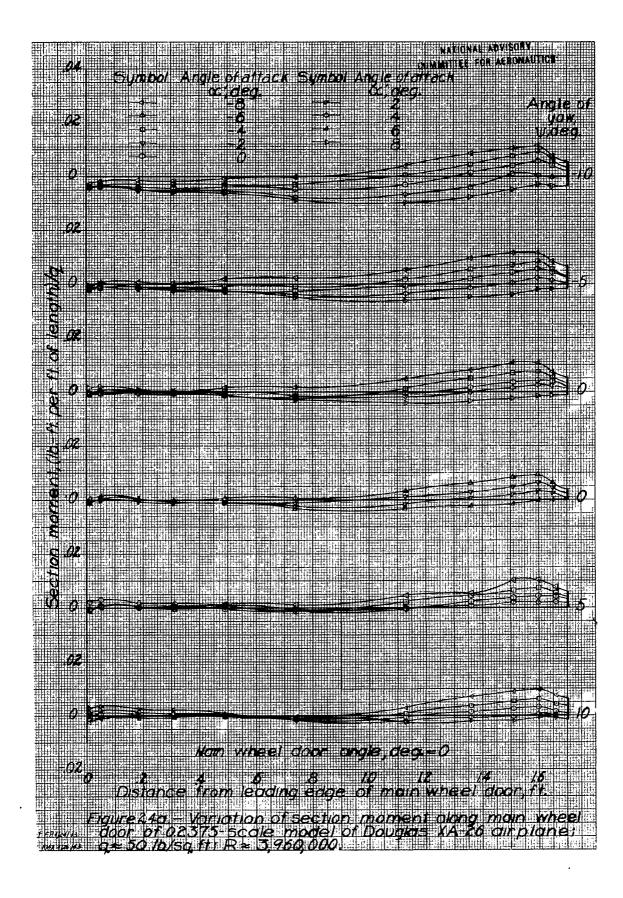


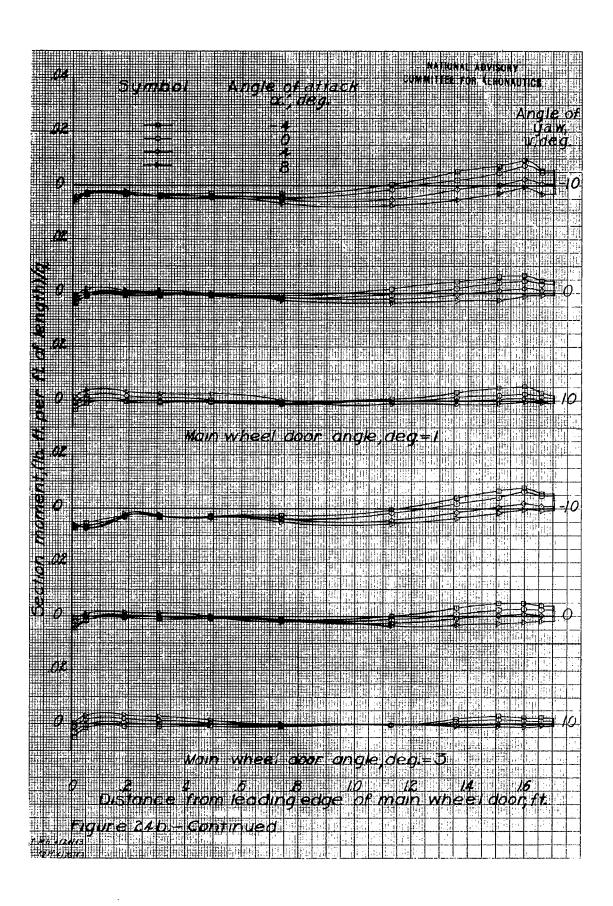


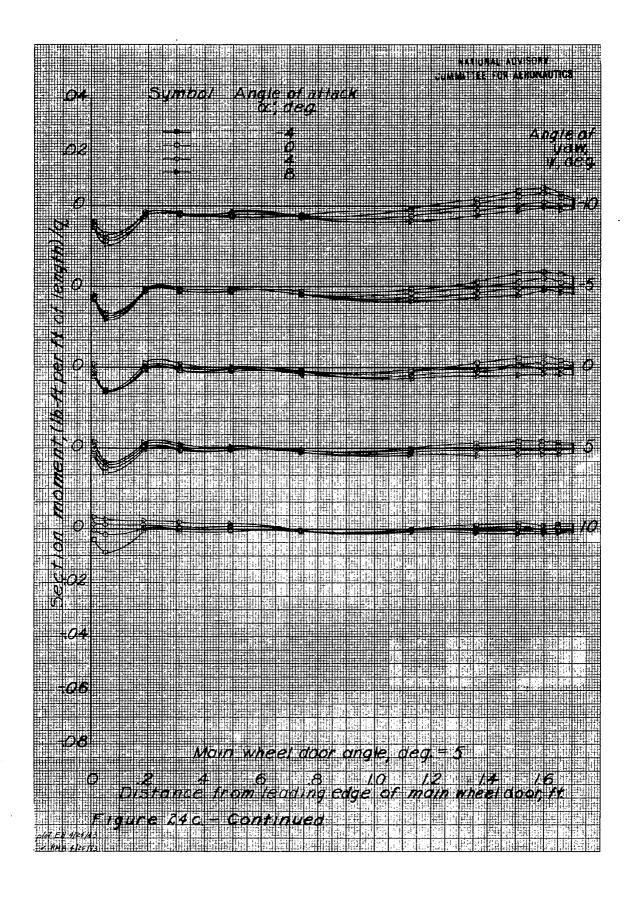


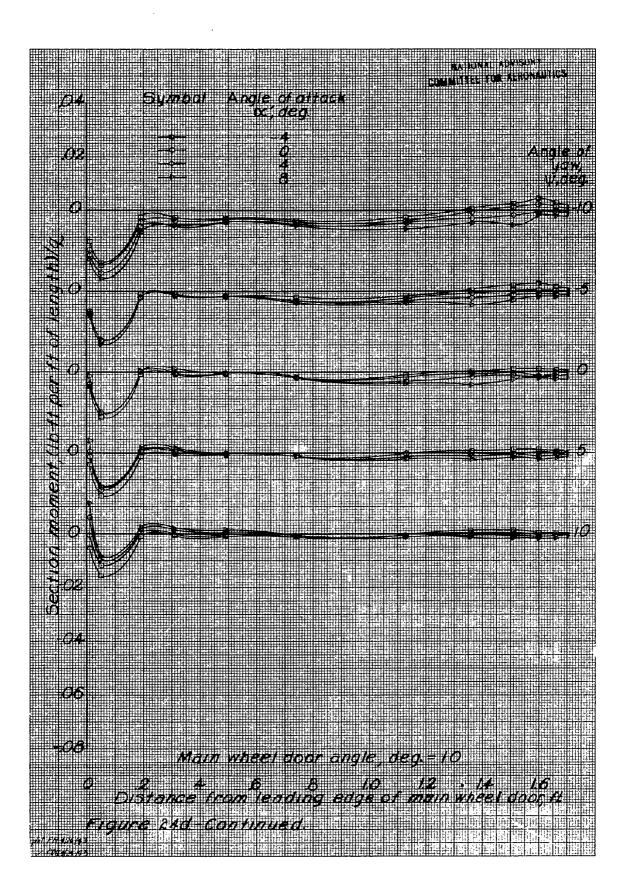


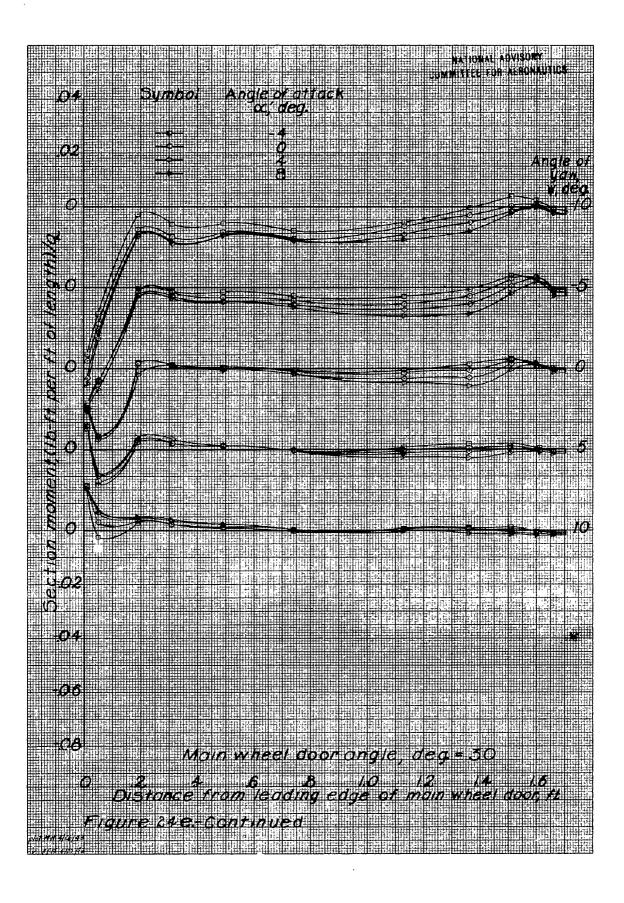


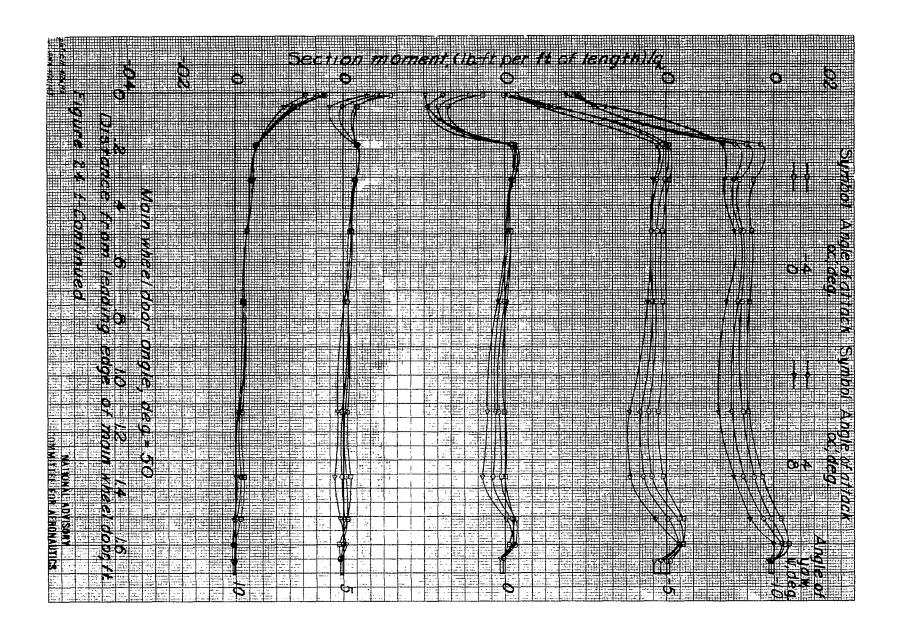


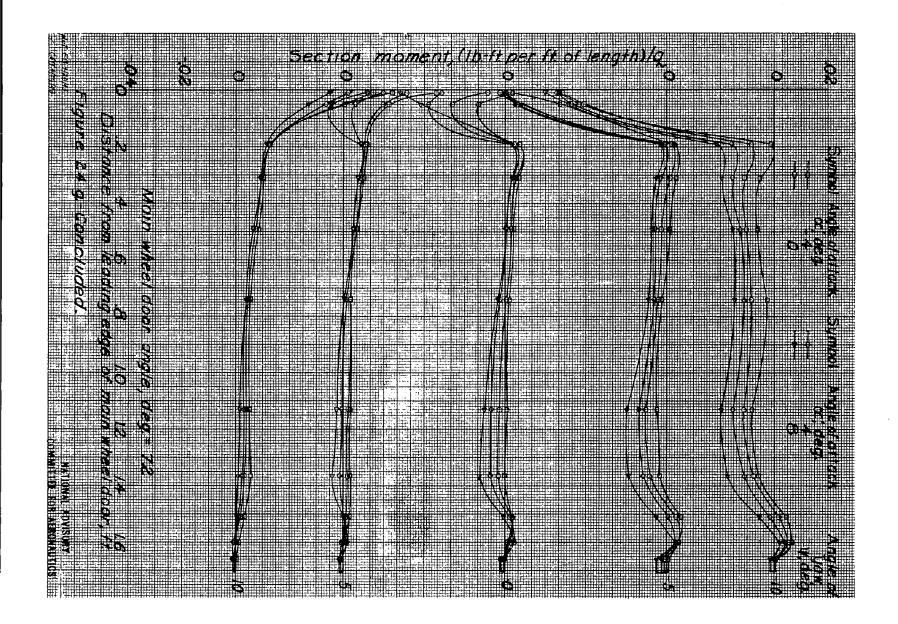


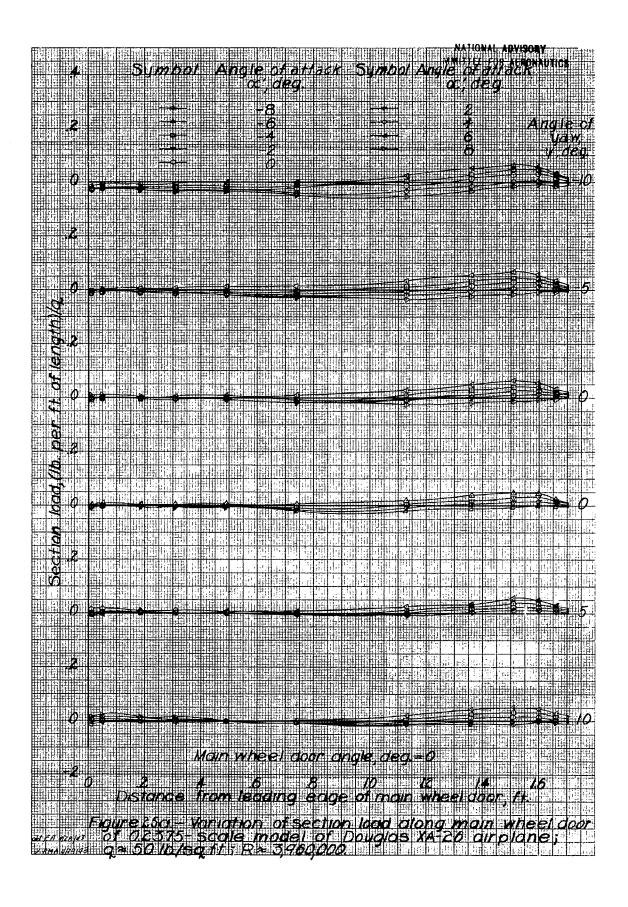


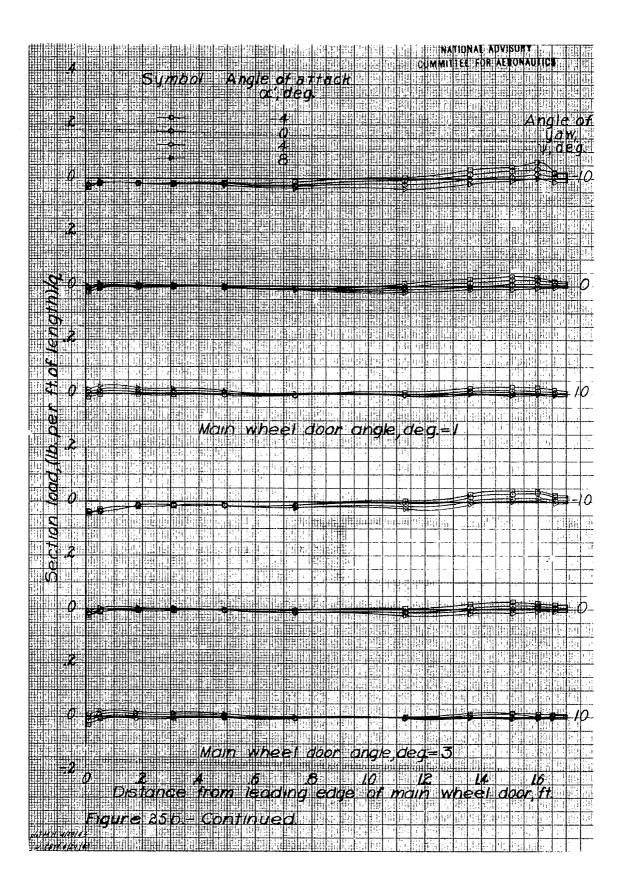

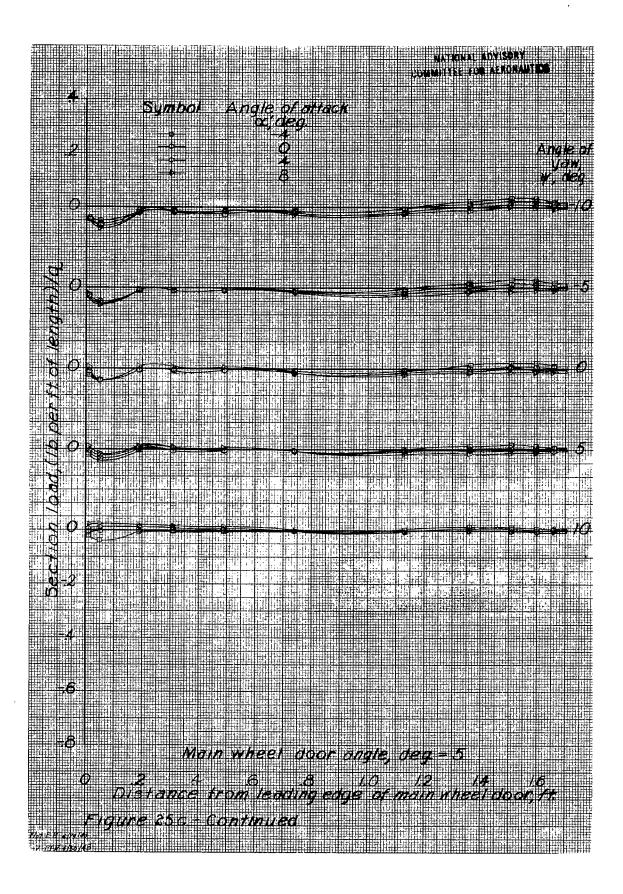


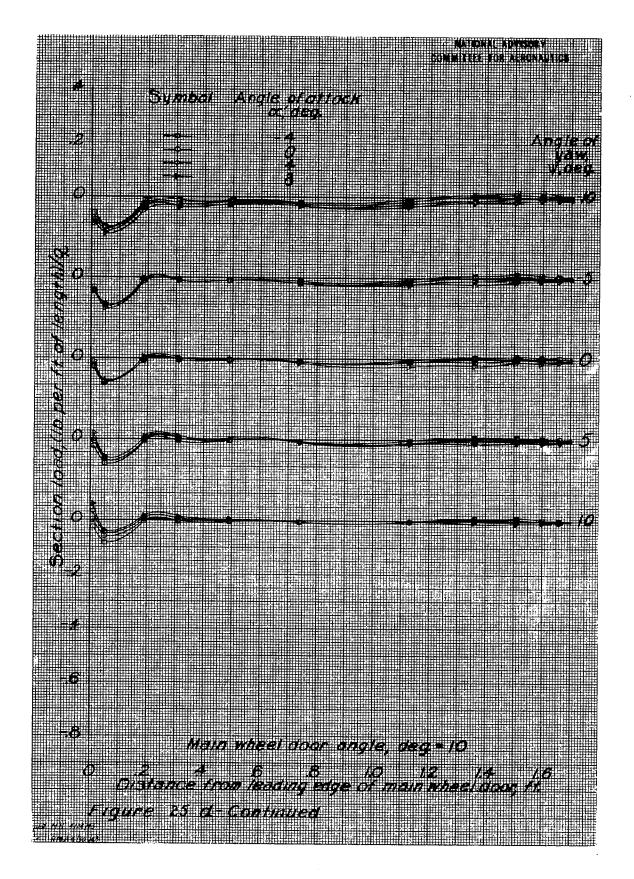


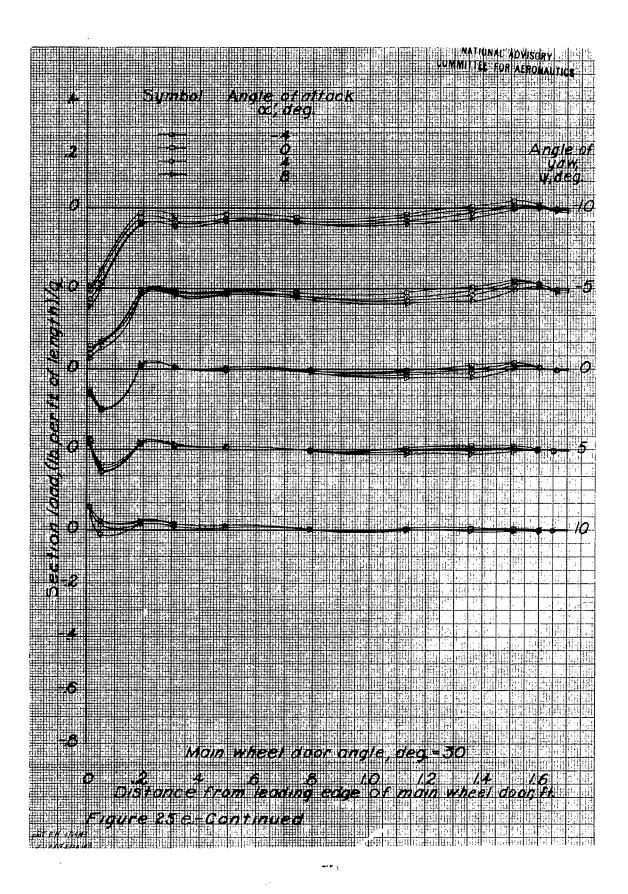


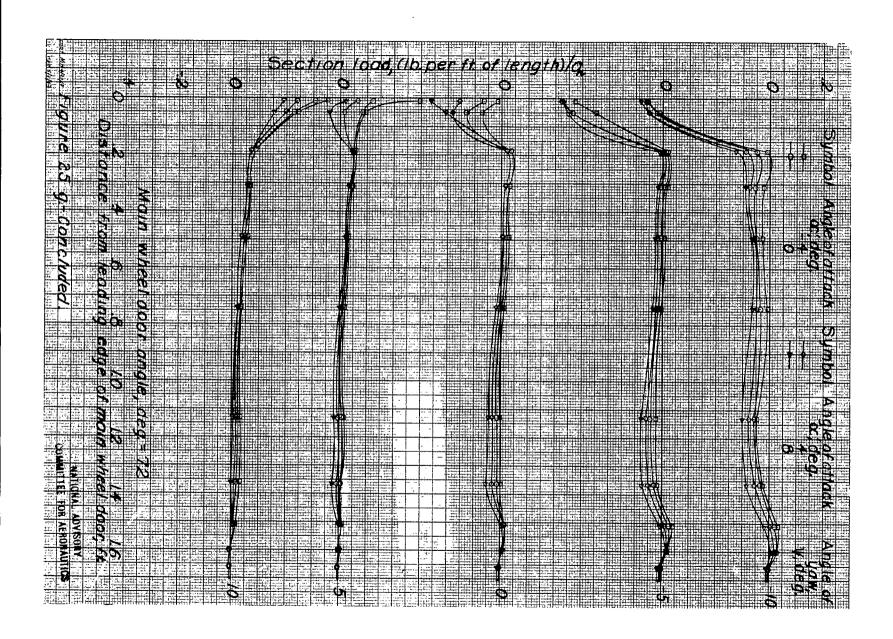



Provide 260 - Variation of section moment along nose wheel door of the section moment along nose wheel door of the section of

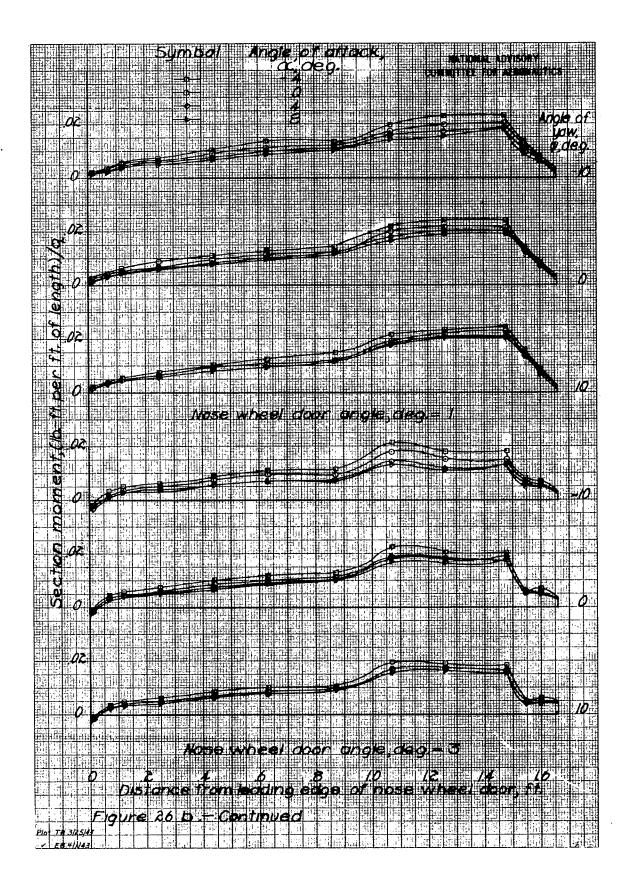

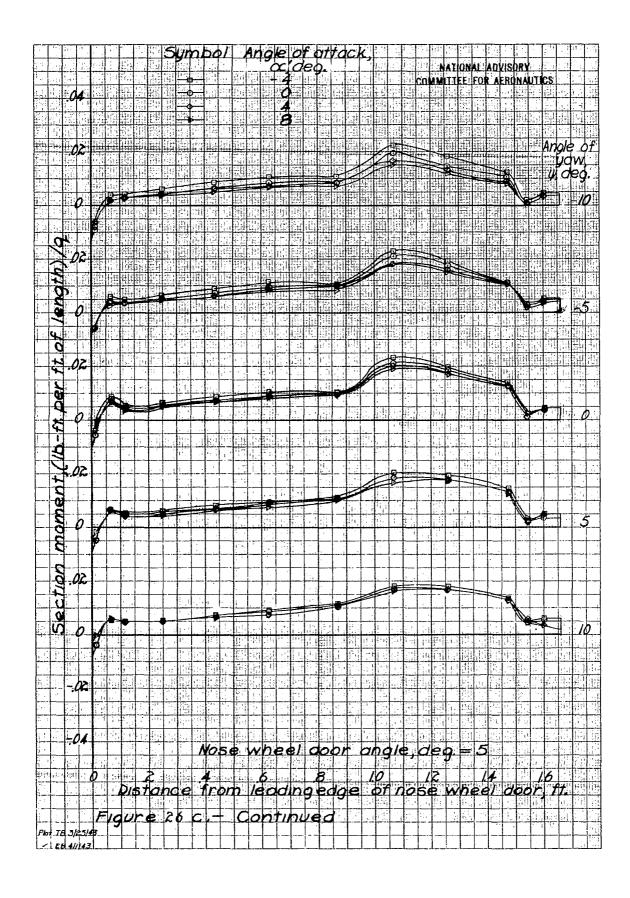


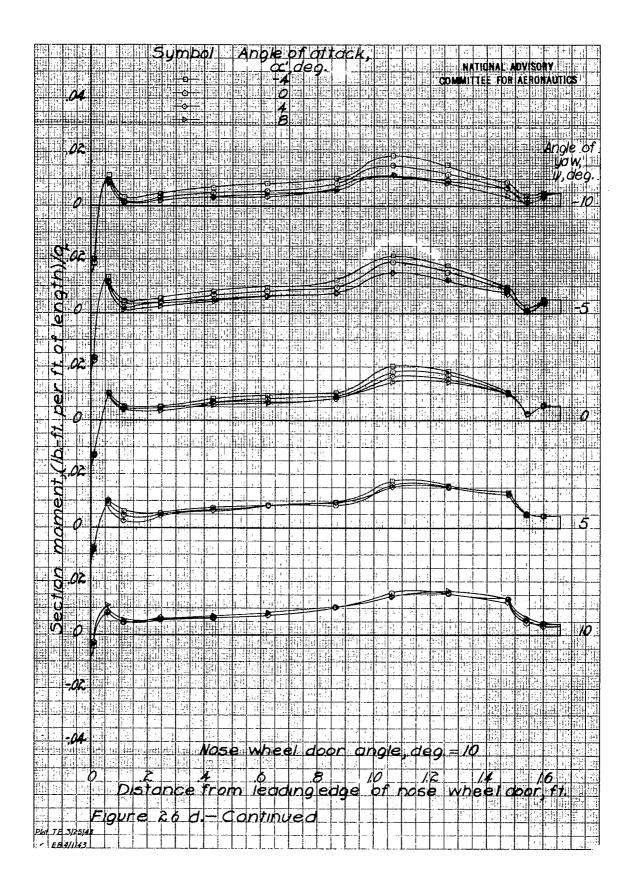


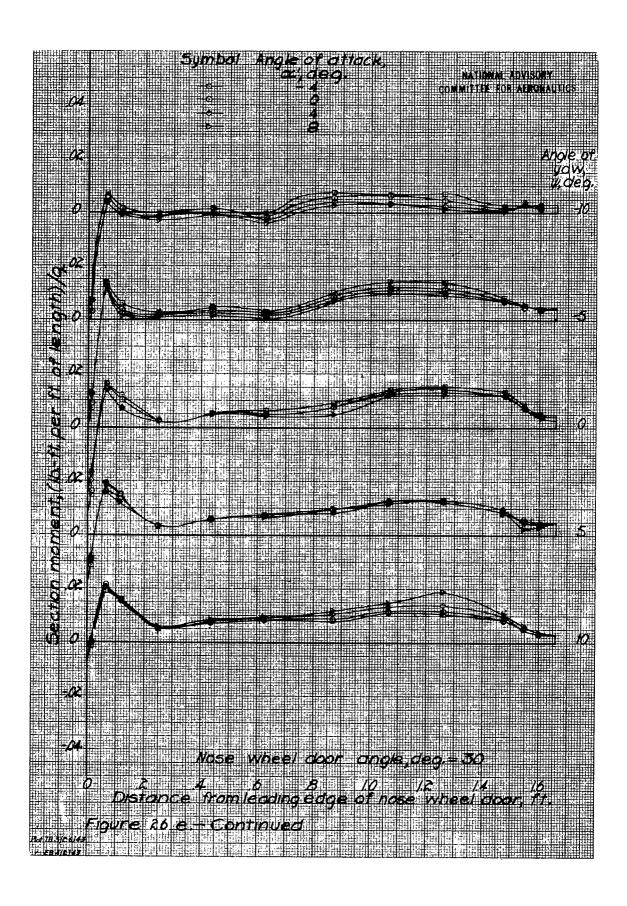


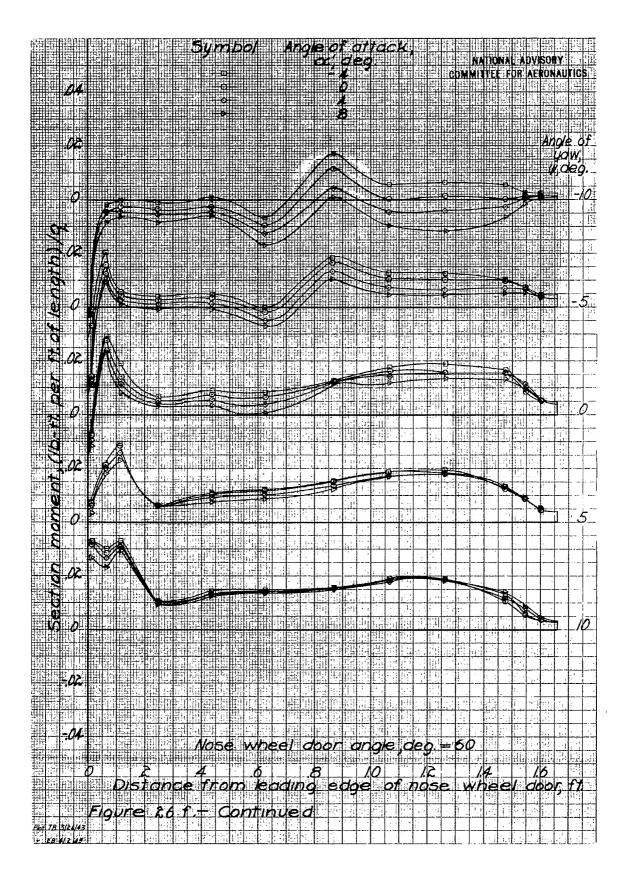

フリ

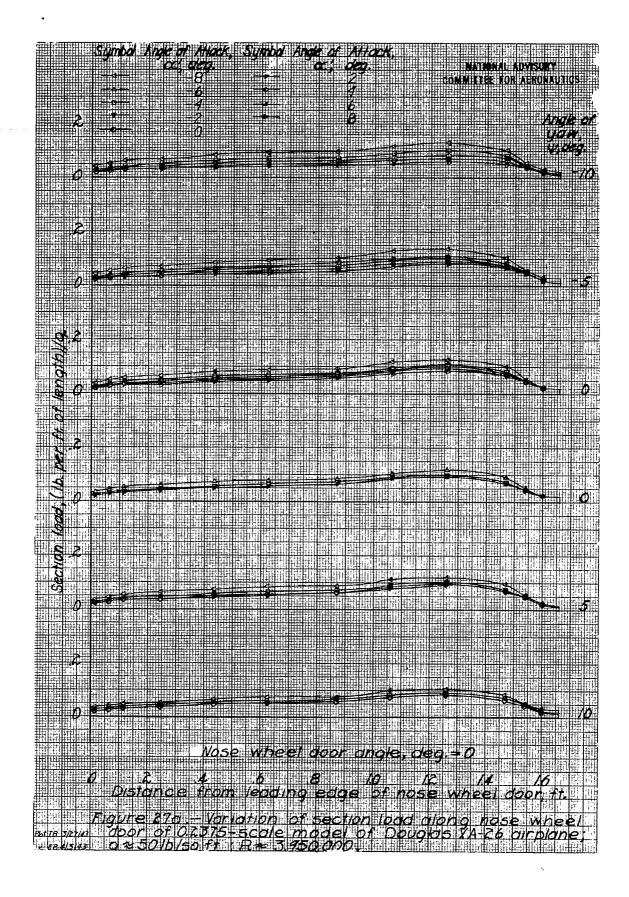

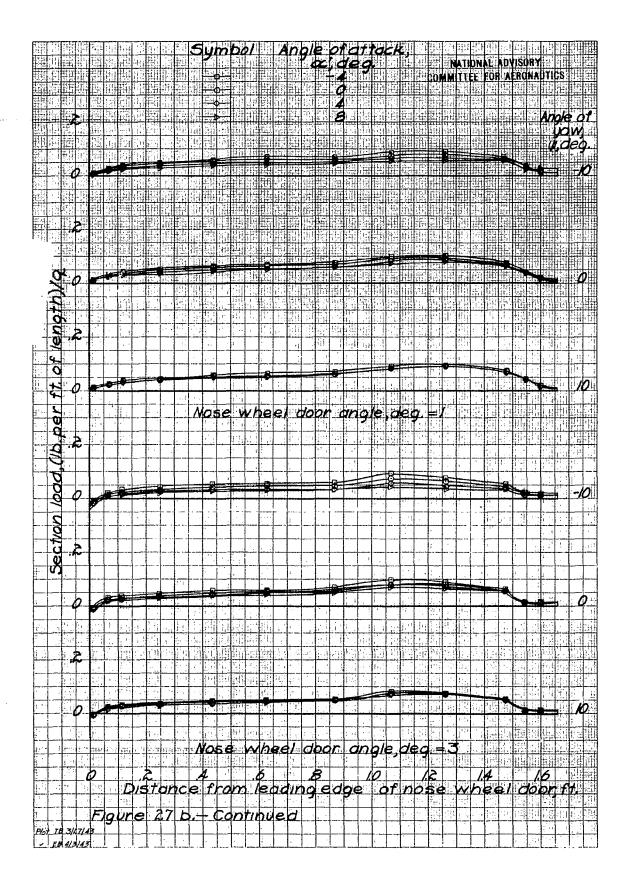

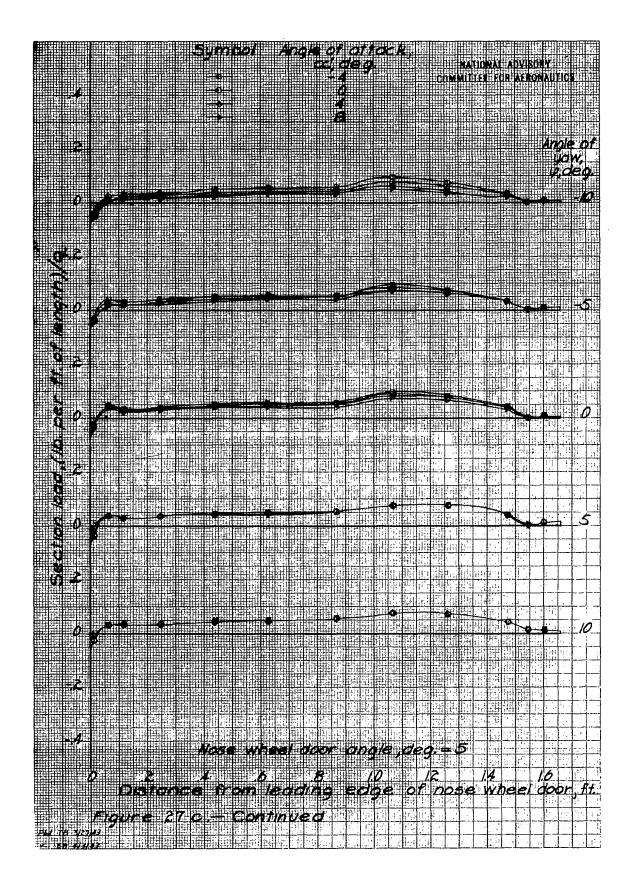

1

